

15-163- 62479-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

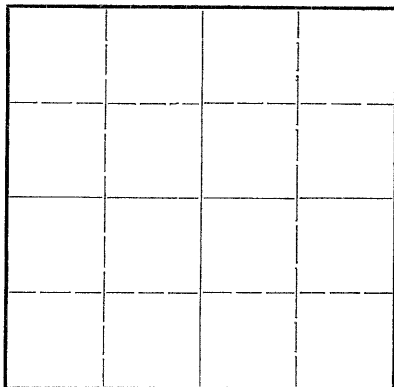

Locate well correctly on above
Section Plat

Rooks County. Sec. 22 Twp. 8S Rge. 19W (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NEc. SW/4
Lease Owner. W. L. Hartman et al.
Lease Name. Petersen Well No. 1
Office Address. P.O. Box 54, Wichita 1, Kansas
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. Nov. 4, 1944 Nov. 4 19 44
Application for plugging filed. Nov. 6 19 44
Application for plugging approved. Nov. 6 19 44
Plugging commenced. Nov. 19 19 44
Plugging completed. Dec. 4 19 44
Reason for abandonment of well or producing formation. Dry

If a producing well is abandoned, date of last production. none 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr, Great Bend, Kansas
Producing formation. Arbuckle Depth to top. 3397' Bottom. 3449' Total Depth of Well. 3449 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0'	168'	8-5/8"	168	None - Cemented
		0'	3401'	5-1/2"	3401'	to top. 2505'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Total Depth 3449'
5-1/2" csg set 3401'; cemented with 75 sax cement.
Filled hole from 3449' to 3400' with crushed rock
Ran cement plug 3400'to 3355'
Filled hole with mud 3355'to 220'
Ran cement plug 220' to 130'
Filled hole from 130' to 75'
Ran cement 75' to 0' Surface

Left 168' of 8-5/8" Surface casing in hole - cemented to surface.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. W. L. Hartman
Address. P.O. Box 54
Wichita 1, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
W. L. Hartman (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

P.O. Box 54, Wichita 1, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of December

My commission expires. Feb. 16, 1946

12/5/44

WELL LOG

Veeder Supply & Dev'l. Co.
Cherryvale, Kansas

Drilled for: W. L. Hartman Farm: Peterson No. 1
Contractor: Veeder Supply & Dev'l Co. Pipe: 168' of 8-5/8" Surface Casing
Location: NEc SW/4 Sec.: 22 Twp.: 8S Range: 19W
Commenced: 9-30-44 County: Rocks State: Kansas

Formation Log

Shale & shells	0	120	120	Chert & Lime	3230	3290	60
Sand & gravel	120	135	15	Lime - Hard	3290	3320	30
Shale & shells	135	165	30	Lime	3320	3360	40
Lime	165	185	20	Lime & shale	3360	3380	20
W.O.C.				Lime	3380	3393	13
Shale & shells	185	540	355	Shale & lime	3393	3404	11
Sand & shale	540	625	85	TOTAL DEPTH -	3404	Feet	
Shale	625	770	145				
Lime	770	780	10				
Shale & shells	780	861	81	SAMPLE LOG - STANDARD TOOLS			
Quick sand	861	1090	229	3397 - 3402	Mainly cement and shoe -		
Sand & shells	1090	1145	55		trace dolomite white dense		
Shale & shells	1145	1180	35		medium crystalline.		
Red bed	1180	1322	142	3402 - 3404	Dolomite finely crystalline		
Anhydrite	1322	1374	52		tan grey - fair oil stain -		
Red bed	1374	1405	31		poor porosity - trace green shale.		
Shale & shells	1405	1490	85	3404 - 3410	Dolomite finely crystalline		
Red bed, shale&shells	1490	1545	55		tan grey and pink - some oolitic		
Shale & shells	1545	1565	20		chert and well rounded sand		
Salt & shells	1565	1605	40		grains - fair oil stain - poor		
Lime & shale	1605	1770	165		porosity.		
Shale & shells	1770	1850	80	3410 - 3420	Dolomite medium crystalline tan -		
Shale & lime	1850	1935	85		fair oil stain - poor porosity.		
Broken lime	1935	1995	60	3420 - 3432	Dolomite medium crystalline grey -		
Lime & shale	1995	2205	210		fair stain dead oil - poor		
Cherty lime & shale	2205	2255	50		prosity.		
Chert & lime	2255	2295	40	3432 - 3449	Dolomite medium crystalline		
Lime & shale	2295	2370	75		grey dense - poor stain dead oil -		
Shale & sandy lime	2370	2445	75		some light chocolate brown shale.		
Lime	2445	2485	40	3449	TOTAL DEPTH		
Cherty lime & shale	2485	2535	50				
Lime	2535	2650	115				
Broken lime & shale	2650	2690	40				
Broken lime	2690	2760	70				
Lime	2760	2820	60				
Broken lime	2820	2915	95				
Lime & shale	2915	2955	40				
Lime	2955	2970	15				
Lime & shale	2970	3080	110				
Lime	3080	3230	150				

I hereby certify the above sample log,
after standardizing, is true and correct, to
my best knowledge and belief.

W. L. HARTMAN (Signed)

Subscribed and sworn to before me, a
Notary Public, this 9th day of November, 1944.

Mina Schoeb Harrison (Signed)

Comm. exp. 2/16/46 Notary Public

AFFIDAVIT

STATE OF KANSAS)
COUNTY OF MONTGOMERY) ss:

EMMETT C. VEEDER, of lawful age, being duly and solemnly sworn on oath says:
I am a resident of Cherryvale, Montgomery County, Kansas, and I hereby know and on
oath state that the above drilling log covering the Peterson #1 well in Section 22-8S-19W,
Rocks County, Kansas, is true and correct.

Further affiant saith not.

THE VEEDER SUPPLY & DEVELOPMENT COMPANY,

By: Emmett C. Veeder (Signed)
President

Subscribed and sworn to before me this 2nd day of November, 1944.

My commission expires: July 11, 1948

Cleo Conrad /s/ Notary Public