

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Graham County, Sec. 19 Twp. 9S Rge. (E) 21 (W)

Location as "NE/CNW/SW" or footage from lines 330' FNL 1650' FWL

Lease Owner Cities Service Oil Company

Lease Name Pricer Well No. 2

Office Address Box 553 Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 4-27 1951

Application for plugging filed 1-24 19 67

Application for plugging approved 1-25 19 67


Plugging commenced 3-15 19 67

Plugging completed 3-16 19 67

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 12-22 19 66

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

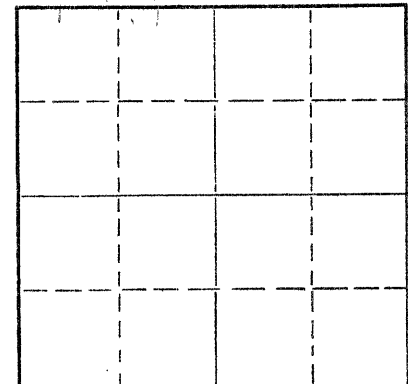

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Nichols

Producing formation Ero. Arbuckle Depth to top 3855' Bottom 3864' Total Depth of Well 3864 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	None
				5 1/2"	3898'	None
<p>RECEIVED STATE CORPORATION COMMISSION 4/3/67 APR 3 1967 CONSERVATION DIVISION Wichita, Kansas</p>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, pushed plug to 3500' and ran 20' of sand to 3480'
Ran 5 sacks of cement filling to 3440'
Filled hole with mud from 3440' to 400'
Rock bridge 400' to 386'
Filled hole from 386' to base of cellar W/Ready Mix Cement
Plugging complete 11 A.M. 3-16-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company

Address Chase, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

M. M. Hardin (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin M. M. Hardin, Dist. Supt.

Box 553 Russell, Kansas 67665

(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of March, 1967

James F. Kyger Notary Public.

10-5-68

My commission expires

WELL RECORD

15-065-01445-00-00

Company Cities Service Oil Co. Well No. 2 Farm Priceer
 Location 330' South and 990' West of N/4 Cor. Sec. 19 T. 9 R. 21W
 Elevation 2337 (2334 Gr.) County Graham State Kansas
 Drlg. Comm. April 13, 1951 Contractor R. W. Rine Drilling Company
 Drlg. Comp. April 27, 1951 Acid None
 T. D. 3864' Initial Prod. Draw-down Potential: 3000 oil, no water, 24 hrs. (4-30-51)
 Ind. Cap. 5968 bbls. per day.

CASING RECORD:

8-5/8" @ 240' cem. 175 ex cement
 5-1/2" @ 3858' cem. 175 ex cement

FORMATION RECORD:

sand, clay & slate rock	0-40
sand & clay	240
shale, shells & sand	1220
sand, shells & shale	1805
anhydrite	1840
shale & shells	1860
shale	2200
shale & lime	2445
lime & shale	2610
lime	2730
shale & lime	2870
shale	3100
shale & lime	3395
lime	3841
shale	3856
lime	3860
lime	3860 RTD = 3859 SLM
lime	3864 T. D.

Corr. Weebner	3507'
Corr. Dodge	3528'
Corr. Lansing	3546' (-1212)
Corr. Cherty Conglomerate	3820'
Corr. Simpson	3840'
Corr. Eros. Arbuckle	3855' (-1522)
Corr. Arbuckle	3857'
Penetration	7'
Total Depth	3864' (-1530)

Fillup: 270' oil in 30 mins. at 3861
 610' oil in 55 mins. at 3861
 1020' oil in 1 hr. 25 mins. at 3861
 1560' oil in 2 hrs. 15 mins. at 3861
 2850' oil in 3 hrs. 55 mins. at 3862

SYFO: 500' 0°
 1000' 0°
 1500' 0°
 2000' 1°
 2500' 0°
 3000' 1°
 3500' 1°

7-7/8" rotary hole.

RECEIVED
 THE CORPORATION COMMISSION
 JAN 25 1967
 CONSERVATION DIVISION
 Wichita, Kansas