

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Rooks County. Sec. 17 Twp. 10s Rge. 20 (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE $\frac{1}{2}$ -SE $\frac{1}{4}$ -NE $\frac{1}{4}$
Lease Owner Champlin Refining Company
Lease Name Teall Well No. 1
Office Address Drawer #552, Enid, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed November 26, 19 48
Application for plugging filed November 25, 19 48
Application for plugging approved November 25, 19 48
Plugging commenced November 26, 19 48
Plugging completed November 26, 19 48
Reason for abandonment of well or producing formation _____

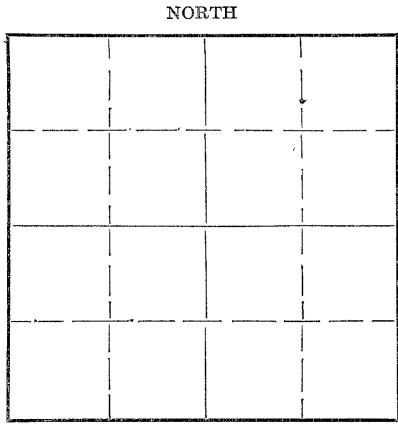

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. M. A. Rives, Hays, Kansas.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3983' DF Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				<u>10$\frac{1}{2}$" OD</u>	<u>160'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

filled hole with heavy rotary mud from 3983' TD. DF. to 160' and set cement plug from using 20 sacks of cement then filled hole with heavy rotary mud from top of plug to 25' and set cement plug from 25' to bottom of cellar using 10 sacks of cement.

12-02-1948
STILL
FOR

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Champlin Refining Company
Address P. O. Drawer #552, Enid, Oklahoma.


STATE OF Kansas, COUNTY OF Barton, SS.
S. P. Hall (employee of owner) or ~~XXXXXX~~ of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. P. Hall
P. O. Box 167, Ellinwood, Kansas. m
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of November, 19 48

My commission expires October 24, 1951 M. Kenneth Steven Notary Public.

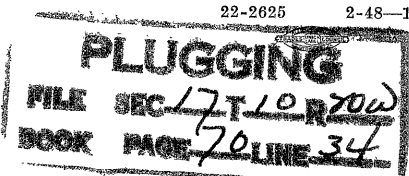

15-163-00134-00-00

CHAMPLIN REFINING COMPANY

TEALL #1 WELL
SE - SE - NE of Section 17-NS-20W
ROOKS COUNTY, KANSAS

FORMATION LOG

0' - 168' Shale & Sand
168' - 390' Shale & Shells
390' - 1310' Shale, Sand, Shells
1310' - 1615' Shale, Salt & Shells
1615' - 1730' Red Bed
1730' - 1795' Lime
1795' - 1870' Shale
1870' - 2050' Shale & Lime
2050' - 2260' Shale & Lime
2260' - 2390' Lime & Shale
2390' - 2505' Lime & Shale
2505' - 2645' Shale & Lime
2645' - 2780' Lime & Shale
2780' - 2805' Lime
2805' - 2820' Sand
2820' - 2920' Shale & Lime
2920' - 3020' Lime & Shale
3020' - 3135' Shale & Lime
3135' - 3205' Lime & Shale
3205' - 3230' Lime & Shale
3230' - 3340' Lime & Shale
3340' - 3395' Lime & Shale
3395' - 3495' Lime & Shale
3495' - 3550' Lime & Shale
3550' - 3630' Lime
3630' - 3700' Lime
3700' - 3800' Lime
3800' - 3880' Conglomerate
3880' - 3950' Conglomerate
3950' - 3995' Conglomerate
3995' - Total Depth (Drill Pipe Measurement)
3985' - TDDF (Schulumberger)

RECORDED
DEC - 2 1948
STA. 12-02-1948
ROOKS COUNTY
KANSAS

PLUGGING
WELL NO. 17-10-20W
PAGE 70 LINE 39