## 15-170

STATE CORPORATION COMMISSION	1	3-163-	03650	-00-00	<b>)</b>	71111 01 -4			
Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division		WELL PLUGGING RECORD							
State Corporation Commission 211 No. Broadway Wichita, Kansas	Sedgw	Lck	County	y. Sec. 14	Twp. 26 Rge.	2 (E) X(XXX)			
NORTH	Location as "NE/CNWKSWK" or footage from lines SW NW Lease Owner Wichita Iron & Metals Corp., Inc.  Lease Name Rose HAMANT Well No. 8								
	Office Address BOX 13021, Wichita, Kansas								
	E .	Date well completed 2-15  Application for plugging filed 4-19  Application for plugging approved 4-19  19 67							
	4								
	Plugging comm	Plugging commenced 5-12 19 67							
	Plugging comp	Plugging completed 5-17 19 67  Reason for abandonment of well or producing formation non-commercial  If a producing well is abandoned, date of last production April 19 67  Was permission obtained from the Conservation Division or its agents before plugging was com-							
	Reason for aba								
	If a producing								
Locate well correctly on above Section Plat	menada	ye	S						
Name of Conservation Agent who sup	ervised plugging of th	is well Pa	ur lurp	2855		2855 _			
Producing formation Cliat		Jepth to top	OJZ Botton	2055	Total Depth of V	Well 2000 Feet			
Show depth and thickness of all water OIL, CAS OR WATER RECORD		as.			C	ASING RECORD			
FORMATION	CONTENT	FROM	то	SIZE	PUT IN	PULLED OUT			
				15½	170	¥82× <del>*</del>			
				81/4	2735	1627'			
				7	2855	1900 <b>'</b>			
Describe in detail the manner is									
in introducing it into the hole. If cer- feet for each plug s		ere used, state t	ne character o	or same and dep	oth placed, from	feet t			

Filled with sand from 2855' to 2800', ran 5 sacks of cement from 2800' to 2780' Set plug and 10' of rock at 200', ran 20 sacks of cement from 200', mudded from 170' to 20' rock and 10 sacks of cement from 20' base of cellar. CONTRACTOR VADOR DINISION Glenn & Smith Pipe Pulling Co. Name of Plugging Contractor\_ Address Box 156, Ellinwood, Kansas Sedgwick STATE OF Kansas ATE OF Kansas COUNTY OF Sedgwick, ss.

Wichita Iron & Metals Corp., Inc. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. WICHITA IRON & METALS CORP., INC.

(Signature) By: 13021, Wichita, Kansas Ray Stekoll (Address)


Subscribed and Sworn to before me this\_

, <sub>19\_6</sub>7

December 22, 1970 My commission expires.

Evelyn V. North

Notary Public.

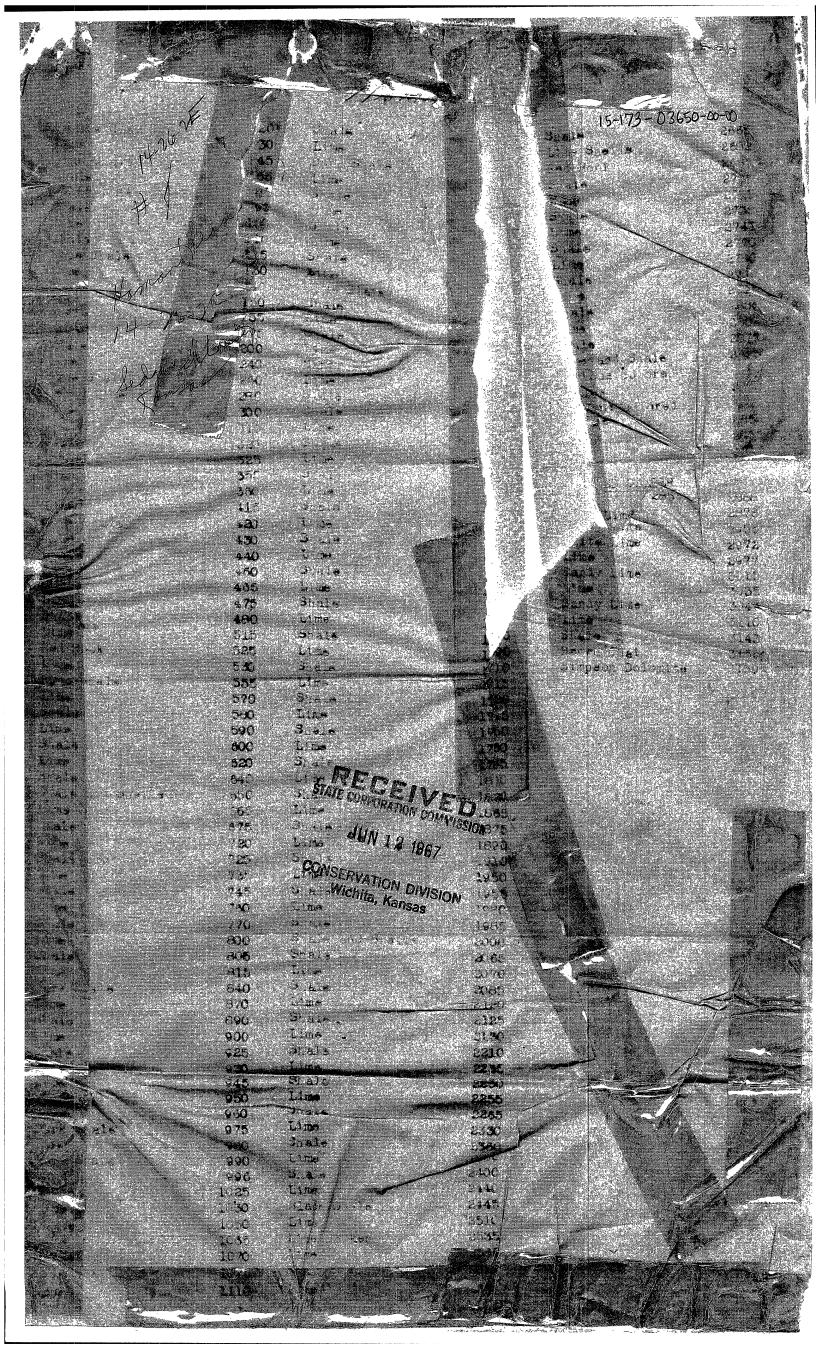

## WELL RECORD

WELL NO. 8

**LEASE** Rose Hamant COMPANY Gypsy

AUTH. K-1528

DATE—Drilling Began

1-11-33

Well Completed

2-15-33

First Production

Вy

Not SHOT-Date Shot

With

Quarts-From

To

2-13-33

SAND RECORD

Chat - 2852' to 2855'

TOTAL DEPTH 2855'

INITIAL PRODUCTION\*

"S" 1061.00 Bbls. (2/13)

253/4 Water

831.00 Bbls. (2/17)

3601/2 Water

<b>-</b> -			*	CAS	ING RE	CORD			
Size	Wt.	Thd.	Class	Make	Run	Sacks Cement	Pounds Cal. Chio.	Pulled	Left In
15½	70	8	SH	Lapweld	170				170°
13-3/8	54	1	SH	Seamless	1401			1401'	ng minj.
10	40	:	SH	Seamless	2008			2008	the Co
84	32	10	SH	Seamless	2735		1		. 2735
6–5/8	24	10	SH	Seamless	134'4'	(5 Jt	s) set	at -	2855

(\*) Best Day; "F", Flowing Naturally; "L", Air-Gas Lift; "S", Swabbing; "P", Pumping.

Elevation -13771

DRILLED DEEPER:

3-13-33

To

FROM:

6-5/8**"** 6-5/8**"** 

2855' Chat

To

Simpson Dolomite

4- 9-33 31592'

AFE #2875

AFE #3171

כת

CASING:

Pulled liner, 134'

Pulled liner, 134'
Set 119 jts. 24# 10-thrd. S.S. at 3143' (Cemerical with the same)
"P" 252 oil, 1290 water (3/11) Test - "P" 1187 oil, no water (4/10) -

PRODUCTION:

chit)

Test.

Sumpan

DRILL DEEPER AND TEST ARBUCKLE: DEFTE:

LIMER:

CASING:

ACIDIZED:

PRODUCTION:

9-15-46 to 12-6-46.

Drilled Deeper from 31591 to 3305', top Arbuckle 3292', Top Simpson 3206'.

Plugged back to 3291'

5-1/2" 202' (5 jts.) set at 3295'

Perforated 3268' - 3290' with 88 shots

to test Simpson.

10-15-46 with 1000 gallons.—acidized arbuckle

Before "P" None - Shut Down

After "P" 182 oil No water

PERFORATE CASING:

CASING:

PRODUCTION:

2.11-147 to 2-5-147 and 32.91 \* 32.86

Perforated 3277' to 3264 with 78 shots

Before "P" 7 oil 8 oil No water After "P"

No water

AFE2782

TD

PLUG OFF WILCOX AND RE-OPEN CHAT 2-4-52 to 2-7-52 Depth Plugged back from 3291' to 3068' Casing Perforated 2847'-2850' W/12 Kone shots PRODUCTION: Before "F" .33 Oil No water After "F" 25.00 oil No water 2-12.

2-12-52