

15-173-03470-00-02

WELL PLUGGING RECORD

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Sedgwick County. Sec. 15 Twp. 26S Rge. 2 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE NE SW

Lease Owner Shell Oil Co., Inc.

Lease Name P.F. Lygrisse "B" Well No. 3

Office Address Box 650, McPherson, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed October 19 29

Application for plugging filed 4-22 19 49

Application for plugging approved 4-25 19 49


Plugging commenced 4-27 19 49

Plugging completed 5-3 19 49

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 2-23 19 49

Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

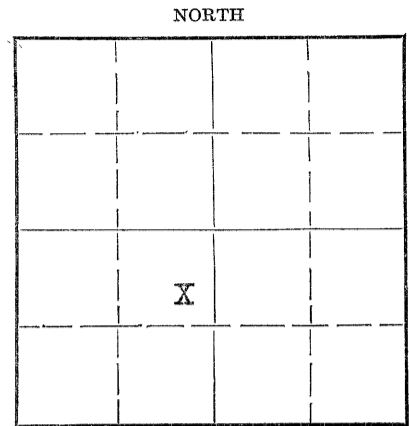

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well J.P. Roberts

Producing formation Viola Depth to top 3191' Bottom 3245' Total Depth of Well 3355 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Viola-Simpson- Arbuckle	Oil & Water	3191'	3245'	15 1/2"	70'	Left in hole.
				8-5/8"	2863'	2025'
				7"	3188'	2149'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to .....feet for each plug set.

Plugged back from: 3355' to 3335' with cement  
3335' to 3280' with rock  
3280' to 3250' with cement  
3250' to 3188' with rock  
3188' to 3160' with cement  
3160' to 149' with mud  
149' to 134' with rock  
134' to 0 with cement & mud

P. & A. COMPLETE: V-3-49

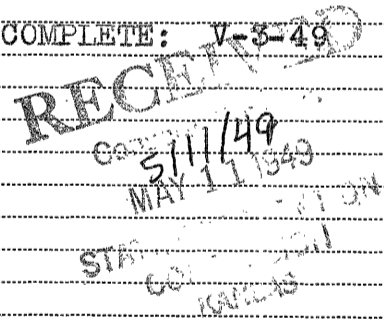

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to L.W. Elderkin, Sup't  
Address Shell Oil Co., Inc., Box 650, McPherson, Kansas

STATE OF Kansas, COUNTY OF McPherson, ss.

L.W. Elderkin (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-  
described well as filed and that the same are true and correct. So help me God.

(Signature) L.W. Elderkin

(Address)

SUBSCRIBED AND SWORN to before me this 10th day of May, 19 49

My commission expires November 19, 1952

Notary Public signature

Notary Public.

15-173-03470-00-02

SHELL OIL COMPANY, INC.

P.F. LYGRISSE "B" Well #3  
 SE NE SW Sec.15-26S 2E  
 250' EL, 1070' NL  
 State of Kansas, Sedgwick  
 County, Greenwich District

WELL LOG:

Depth	Formation
0 - 48	surface
48 - 74	sand-gravel
74 - 92	lime
92 - 412	shale-limeshells
412 - 442	shale
442 - 452	limeshells
452 - 500	lime
500 - 580	sand - lime
580 - 628	shale - lime
628 - 1170	shale
1170 - 1301	broken lime-shale
1301 - 1331	shale
1331 - 1361	broken shale
1361 - 1505	broken shale
1505 - 1565	lime-sand
1565 - 1667	shale-lime
<del>1667 - 1767</del>	<del>broken shale</del>
1767 - 1797	shale
1797 - 1831	broken shale
1831 - 1980	broken lime-shale
1980 - 1990	lime
1990 - 2115	shale-lime
2115 - 2150	broken lime
2150 - 2247	broken lime-shale
2247 - 2406	broken lime
2406 - 2436	shale
2436 - 2485	lime
2485 - 2545	broken lime
2545 - 2570	lime
2570 - 2640	broken lime
2640 - 2676	shale - slate
2676 - 2835	lime - shale
2835 - 2860	broken lime
2860 - 2880	shale- shells
2880 - 2886	variegated shale
2886 <sup>1</sup> / <sub>2</sub> - 2892	lime
2892 - 2895	chat
2895 - 2940	chat
2940 - 2945	lime - chat
2945 - 2970	chat
2970 - 2980	lime hard
2980 - 2997	chat
2997 - 3146	chat & lime
3146 - 3198	shale
3198 - 3200	chatty lime
3200 - 3245	T.D.
3245 - 3272	Deepened Dec. 1948
3272 - 3323	dolomite
3323 - 3355	sand
	shale
	Arbuckle Dolomite
	T.D.

CASING RECORD

7" OD 24# 3188' Cemented with 75 sax  
 8-5/8" OD 32# 2865' Cemented with 200 sax  
 16" OD 70# 88' Cemented with 70 sax

