


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Graham County. Sec. 2 Twp. 8 Rge. (E) 23 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE SW
Lease Owner Harry Gore - Veeder Supply & Devl. Co.
Lease Name Griffith Well No. 1
Office Address 400 Brown Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed April 10, 1952
Application for plugging filed April 10, 1952
Application for plugging approved April 10, 1952
Plugging commenced April 10, 1952
Plugging completed April 10, 1952
Reason for abandonment of well or producing formation _____

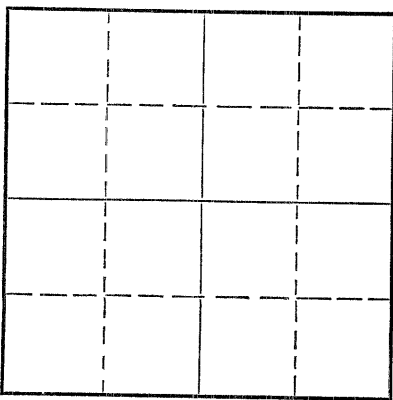

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,955 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|----|-------|--------|------------|
| | | | | 8 5/8 | 240 | Cemented |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 230', set plug and $\frac{1}{2}$ sack of cotton seed hulls and 15 sacks of cement. Filled with mud to 40', set plug and $\frac{1}{2}$ sack of cotton seed hulls and 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor The Veeder Supply & Development Company
Address P. O. Box 201, Cherryvale, Kansas

STATE OF KANSAS, COUNTY OF MONTGOMERY, ss. FLOYD W. HILD

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. THE VEEDER SUPPLY & DEVELOPMENT COMPANY

(Signature) Floyd W. Hild

P. O. Box 201, Cherryvale, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of April, 1952.

Les Lawson
Notary Public.

My commission expires July 11, 1952

23-8390-s 6-51-20M

PLUGGING
FILE SEC 27 L R 232
BOOK PAGE 9 LINE 28

Received:
May 1st, 1952


15-065-00216.00-00

Company Harry Gore - Veeder Supply Company

Sec. 2 T. 8S R. 23W
Loc. Southwest Quarter (SW/4)
County Graham

Farm Griffith No. 1

Total Depth 3955'
Comm. 3-29-52 Comp. 4-9-52
Shot or Treated
Contractor Veeder Supply Co. Drilled with Rig - D
Issued No. of Days - 12
No. of Bitts -



Casing
20 in. 10 in
15 1/2 8 1/4
12 1/2 6 5/8
13 3/8 5 3/16

Set 244.28' of 8-5/8" Casing Cemented with 150 sacks cement.

Elevation

Production

Figures Indicate Bottom of Formation

| | | | |
|--------------|-------|------|-----|
| Cellar | 0 | 9 | 9 |
| Clay | 9 | 75 | 66 |
| Shale | 75 | 170 | 95 |
| Sand Shale | 170 | 200 | 30 |
| Shale | 200 | 600 | 400 |
| Shale Shells | 600 | 890 | 290 |
| Shale Sand | 890 | 1200 | 310 |
| Shale Shells | 1200 | 1400 | 200 |
| Shale Sand | 1400 | 1635 | 235 |
| Red Bed | 1635 | 1910 | 275 |
| Anhydrite | 1910 | 1941 | 31 |
| Shale Shells | 1941 | 2350 | 409 |
| Lime Shale | 2350 | 2830 | 480 |
| Lime | 2830 | 2885 | 55 |
| Lime Shale | 2885 | 3285 | 400 |
| Lime | 3285 | 3295 | 10 |
| Lime Shale | 3295 | 3365 | 70 |
| Lime | 3365 | 3611 | 246 |
| Lime Cherty | 3611 | 3640 | 29 |
| Lime | 3640 | 3740 | 100 |
| Lime Shale | 3740 | 3890 | 150 |
| Conglomerate | 3890 | 3905 | 15 |
| Lime | 3905 | 3955 | 50 |
| Total Depth | 3955' | | |

Tops:

| | |
|-----------------|------|
| Topeka - | 3279 |
| Heebner - | 3484 |
| Dodge - | 3508 |
| Lansing K.C. - | 3521 |
| Base K.C. - | 3739 |
| Chert & Cong. - | 3886 |
| Arbuckle - | 3902 |

Plugged at 230 feet with 15 sacks cement.

Plugged at 40 feet with 10 sacks cement.

PLUGGING
FILE SEC 2 T 8 R 230
BOOK PAGE 7 LINE 28

RECEIVED
STATE CORPORATION COMMISSION
MAY - 1 1952
may-1-1952
CONSERVATION DIVISION
Wichita, Kansas