


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

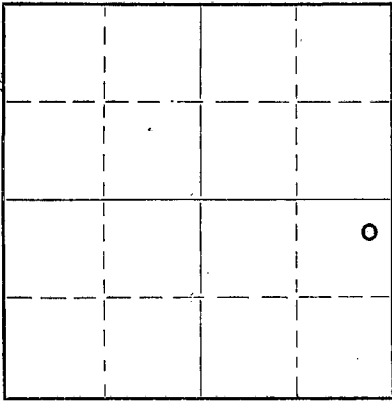

Locate well correctly on above Section Plat

Sedgwick County, Sec. 7 Twp. 26 Rge. 2E (E) (W)

Location as "NE/CNW¹/₄SW¹/₄" or footage from lines NE NE SE
Lease Owner Charles Carlock
Lease Name Schramm "C" Well No. 1
Office Address 206-A Insurance Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 23 1949
Application for plugging filed September 23 (verbal) 1949
Application for plugging approved September 23 1949
Plugging commenced September 23 1949
Plugging completed September 23 1949
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well D. C. Lilley
Producing formation Depth to top Bottom Total Depth of Well 2965 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|----|------|--------|------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back lead wool to 2976 feet.
Three sacks of cement to 2950 feet.
5 1/2 inch perforated in K. C. squeezed with 50 sacks of cement. 3 sacks cement at 2580 feet to 2850 feet, covered perforations. 5 1/2 inch ripped at 2600 feet. Mud to 125 feet. Bridge and rock and 10 sacks cement to 90 feet. Mud to 10'.. Rock and 2 sacks cement.


(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Charles Carlock
Address 206-A Insurance Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles Carlock
(Address) 206-A Insurance Building, Wichita, Kansas
October 5, 1949
Seward B. Breckler
Notary Public.



RECEIVED
January 31, 1953

PLUGGING
10-5-49

TIME LOG

Charles Carlock #1 Schramm "C",
NE NE SE 7-26-2E, Sedgwick Co. Kansas.

Elevation 1414 derrick floor,
1416 rotary bushing.

| Depth | Drilling time | Remarks |
|-------------------------------------|-------------------------------|--------------------|
| Drilling time 5' interval 90'-2400' | | |
| 90-100 | 4-4 | OVS Rerun |
| 100-150 | 4-4-5-6-3-7-4-13-13-29 | |
| 150-200 | 15-6-5-11-5-13-19-8-13-8 | |
| 200-250 | 8-9-16-15-26-13-7-6-16-18 | |
| 250-300 | 18-11-6-12-10-11-16-12-21-19 | |
| 300-350 | 20-15-7-20-10-8-7-7-13-13 | Trip 305 OSQ rerun |
| 350-400 | 17-17-18-27-15-9-9-8-9-9 | |
| 400-450 | 10-15-12-22-20-12-15-9-10-10 | |
| 450-500 | 10-10-10-20-13-15-7-8-11-13 | |
| 500-550 | 10-12-6-4-6-6-6-7-9-15 | |
| 550-600 | 22-12-9-8-7-10-11-10-10-10 | Trip 595 OVS rerun |
| 600-650 | 10-6-12-16-22-12-11-3-4-19 | |
| 650-700 | 13-8-9-22-31-4-6-5-7-8 | Trip 675 OSQ1 |
| 700-750 | 8-6-8-8-6-7-5-11-9-10 | |
| 750-800 | 8-7-7-6-9-9-8-7-7-8 | |
| 800-850 | 8-7-7-8-10-8-8-10-10-11 | |
| 850-900 | 4-8-12-10-10-4-12-10-9-9 | |
| 900-950 | 7-12-17-7-12-13-9-9-9-7 | |
| 950-1000 | 10-6-10-7-6-15-9-10-6-6 | |
| 1000-1050 | 6-3-2-2-3-4-3-2-2-2 | Trip 1005 OSC3 |
| 1050-1100 | 2-3-3-2-3-3-5-3-3-3 | |
| 1100-1150 | 3-3-4-4-4-3-3-3-4-4 | |
| 1150-1200 | 3-2-3-3-4-3-2-3-3-5 | |
| 1200-1250 | 3-3-3-3-3-3-4-4-5-3 | |
| 1250-1300 | 5-6-4-4-3-3-3-3-4-6 | |
| 1300-1350 | 11-5-6-6-3-4-5-4-9-7 | |
| 1350-1400 | 5-4-7-6-5-6-6-4-4-8 | |
| 1400-1450 | 4-3-2-2-3-5-4-3-3-3 | |
| 1450-1500 | 3-4-3-3-3-3-3-6-6-3 | |
| 1500-1550 | 7-7-9-7-9-14-10-7-6-6 | |
| 1550-1600 | 9-12-4-6-5-5-4-5-4-6 | |
| 1600-1650 | 8-11-11-8-15-14-14-9-12-14 | Trip 1650 OSQ2 |
| 1650-1700 | 9-7-5-5-6-2-8-5-6-7 | |
| 1700-1750 | 11-8-6-11-6-8-7-11-13-9 | |
| 1750-1800 | 7-6-5-6-6-7-11-10-5-5 | |
| 1800-1850 | 7-10-12-12-8-14-12-13-11-16 | |
| 1850-1900 | 8-14-11-14-14-15-20-30-17-17 | |
| 1900-1950 | 13-20-12-16-9-20-13-16-11-17 | |
| 1950-2000 | 17-15-15-31-10-11-16-11-11-11 | Trip 1970 |
| 2000-2050 | 6-7-8-10-11-15-7-8-11-10 | |
| 2050-2100 | 9-8-8-11-11-11-10-11-11-10 | |
| 2100-2150 | 11-12-11-12-12-11-12-12-11-12 | |
| 2150-2200 | 12-12-12-13-13-11-12-11-11-13 | |
| 2200-2250 | 12-18-8-11-8-16-14-15-15-15 | |
| 2250-2300 | 14-14-14-15-13-14-14-15-13-14 | |
| 2300-2350 | 14-14-13-13-13-15-21-15-21-25 | |
| 2350-2400 | 34-42-21-19-17-16-16-15-15-15 | Trip 2360 |

Drilling time 1' interval 2400' to total depth

| | |
|-----------|----------------------|
| 2400-2410 | 3-3-3-3-3-3-3-3-3-3- |
| 2420 | 4-3-4-3-4-3-3-3-3-4 |
| 2430 | 4-3-3-4-3-4-3-4-4-3 |
| 2440 | 4-4-4-4-4-4-3-4-3-4 |
| 2450 | 4-4-4-5-4-4-3-4-3-3 |
| 2460 | 3-4-4-4-4-4-5-5-5-4 |
| 2470 | 3-4-5-4-5-3-5-6-4-7 |
| 2480 | 3-4-5-4-4-5-4-5-5-5 |
| 2490 | 5-3-4-5-5-5-5-5-6-6 |
| 2490-2500 | 6-5-6-6-6-5-5-5-6-4 |

PLUGGING
 REC-7-1-2-2-26
 BOOK PAGE 44-45-46

RECEIVED
 OCT 5 1949
 STATE CORPORATION
 COMMISSION
 KANSAS

2500-2510 4-4-5-4-3-4-4-4-4-4
2520 4-4-4-4-5-4-4-4-6-5
2530 4-5-5-4-5-5-5-3-4-3
2540 4-4-2-2-5-4-3-4-5-5
2550 4-4-4-4-4-3-3-5-4-3
2560 5-4-4-5-3-4-3-4-3-4
2570 4-5-6-7-7-7-7-6-5-4
2580 2-1-1-3-1-1-1-1-2-2
2590 1-2-2-2-5-3-3-3-3-2
2600 5-5-4-6-4-3-4-6-5-3
2600-2610 3-3-3-1-5-7-6-5-6-6
2620 5-5-3-6-5-5-7-8-7-8
2630 8-8-5-3-7-7-8-7-8-8
2640 6-5-4-5-7-5-5-5-5-4
2650 4-4-4-5-5-6-5-6-6-7
2660 8-9-8-4-2-7-3-2-5-5
2670 6-7-3-4-4-4-5-5-5-3
2680 4-3-4-5-5-3-3-4-4-4
2690 4-5-4-4-4-3-3-4-3-3
2700 3-3-4-3-3-3-3-3-4-4
2700-2710 4-3-4-4-4-3-3-4-3-4
2720 4-4-4-3-4-3-4-4-4-3
2730 3-3-3-4-3-4-4-4-4-5
2740 4-4-5-5-4-4-2-3-2-4
2750 4-4-3-4-4-4-4-4-3-3
2760 3-4-5-5-4-4-4-4-4-3
2770 4-4-4-3-3-3-3-3-4-4
2780 4-4-4-3-5-5-6-4-5-4
2790 4-5-5-5-4-5-5-4-4-5
2800 4-5-5-5-5-4-5-4-4-4
2800-2810 4-3-4-4-4-5-5-6-6-5
2820 4-4-3-6-6-6-5-5-6-6
2830 5-6-5-5-6-5-5-6-5-6
2840 5-5-6-5-5-6-6-5-6-5
2850 3-4-5-5-6-6-4-6-5-5
2860 6-5-5-6-5-6-6-5-5-6
2870 6-6-6-6-6-7-7-6-6-6
2880 6-6-5-4-3-6-6-5-5-4
2890 5-4-6-4-4-5-7-5-6-6
2900 6-6-7-7-6-7-7-7-7-5
2900-2910 5-6-5-5-5-6-5-7-6-7
2920 6-5-7-6-7-7-7-6-6-7
2930 7-7-7-8-7-7-6-5-5-4
2940 3-3-3-3-3-4-6-4-6-5
2950 5-6-5-6-7-7-5-4-4-4
2960 5-6-6-6-6-7-6-7-7-7
2965 8-9-7-5-2

Circ. for samples 2535

Circ. for samples 2585

Trip 2662 OSQ2
Circ. for samples 2675

Total depth; circ for samples 2964, 2965

RECEIVED
JUN 27 1949
DEPARTMENT OF
COMMISSION
GWS 15