


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Sedgwick County, Sec. 9 Twp. 28 Rge. 2 (E) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE NW
Lease Owner John P. Gaty
Lease Name Wineteer Well No. 1
Office Address 6600 E. Central
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed Nov. 7 19.49
Application for plugging filed Nov. 9 19.49
Application for plugging approved Nov. 9 19.49
Plugging commenced Nov. 9 19.49
Plugging completed Nov. 9 19.49
Reason for abandonment of well or producing formation. Hole full of water

NORTH

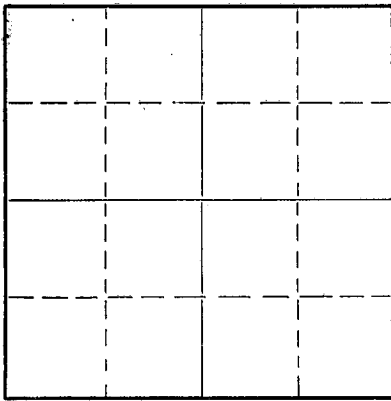

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19...
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dwight Lilly
Producing formation Simpson Sand Depth to top 3289 Bottom 3392 $\frac{1}{2}$ Total Depth of Well 3392 $\frac{1}{2}$ Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Simpson Sand	water	3392	3392 $\frac{1}{2}$	7" od	3284	3284

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to... feet for each plug set.

Mudded hole from 3292 $\frac{1}{2}$ Ft. to 135 ft. Bridged hole with rock to 120 ft. 15 sacks cement to 105 ft. mud to 10 ft. or cellar 5 sacks cement in cellar.

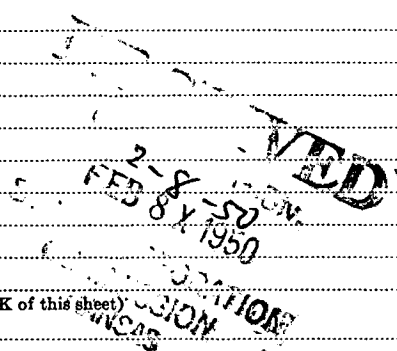

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to...
Address...

STATE OF _____, COUNTY OF _____, ss.
_____(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) May Tolocall
210 N. Edgewood Dr.
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of January, 1950
Berenice K. Cohen
Notary Public.

My commission expires January 12, 1952

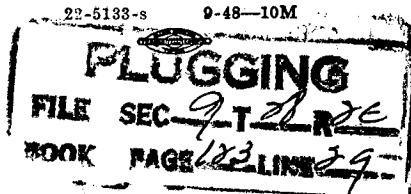

Elev. 1360 df.

DRILLING LOG

JOHN P. GATY - Winstear No. 1 Well

Location: NE NE NW
Section 9-288-2E
Sedgwick County, Kansas

Commenced:

Completed:

-8 Cellar
 -40 Yellow Clay
 -55 Yellow Clay
 -62 Shale
 -70 Gravel (2 BW 65-69)
 -75 Shale
 -84 Shale
 -88 Broken Lime
 -90 Shale
 -100 Gravel
 -110 Shale
 -117 Shale
 -122 Lime (hard)
 -125 Shale
 -140 Lime
 -145 Lime
 -150 Shale
 -170 Lime
 -175 Lime
 -180 Shale
 -190 Lime
 -210 Shale and Shells
 -220 Shale and Shells
 -235 Lime
 -240 Shale
 -245 Lime
 -295 Shale
 -305 Lime
 -332 Shale
 -338 Red Rock
 -355 Lime
 -370 Lime
 -375 Shale
 -400 Lime
 -405 Shale
 -425 Lime
 -450 Shale
 -475 Lime (Soft - Sandy) 1 BW 465 - 470
 -485 Lime
 -500 Shale
 -525 Shale
 -530 Shale
 -545 Lime
 -580 Lime
 -585 Shale
 -592 Red Rock
 -600 Lime
 -605 Shale

-610 Lime (hard)
 -615 Shale
 -640 Lime
 -675 Lime
 -680 Lime
 -685 Shale
 -690 Lime
 -695 Shale
 -705 Lime
 -710 Lime
 -715 Shale
 -740 Lime
 -760 Shale and Shells
 -770 Lime
 -785 Shale and Shells
 -795 Shale and Shells
 -815 Lime
 -825 Shale and Shells
 -830 Shale and Shells
 -855 Lime
 -860 Shale
 -870 Lime
 -880 Shale
 -890 Lime
 -900 Lime
 -905 Shale
 -920 Lime
 -930 Shale
 -935 Lime
 -940 Shale
 -960 Shale
 -965 Lime (hard)
 -975 Shale
 -990 Shale
 -995 Lime
 -1015 Shale and Shells
 -1030 Shale and Shells
 -1042 Shale
 -1045 Lime
 -1070 Shale
 -1080 Lime (Sandy)
 -1090 Shale
 -1100 Shale
 -1110 Lime
 -1120 Shale
 -1125 Lime
 -1130 Lime
 -1140 Shale and Shells

PLUGGING
 FILE SEC 9 T 28 R 2 E
 200X 100' LINE 29

-1145	Lime	-1790	Lime (hard)
-1155	Shale	-1800	Lime
-1160	Lime	-1815	Shale
-1165	Lime	-1825	Lime
-1170	Shale	-1855	Lime
-1175	Shale	-1865	Lime (hard)
-1180	Shale (blue)	-1870	Lime
-1190	Shale (Rotten and Sandy)	-1880	Lime
-1195	Shale	-1885	Shale
-1205	Lime (hard)	-1905	Lime
-1210	Shale	-1925	Lime
-1215	Shale	-1950	Lime
-1220	Lime (hard)	-1965	Lime (hard)
-1230	Lime (hard)	-1980	Shale
-1235	Lime	-2015	Shale
-1240	Lime	-2040	Shale (HW 2040 - 2073)
-1255	Lime	-2073	Sand
-1265	Lime (hard)	-2075	Lime
-1280	Shale	-2086	Lime
-1290	Lime (hard)	-2088	Shale
-1295	Shale	-2095	Shale
-1300	Lime	-2125	Shale
-1315	Shale	-2145	Shale
-1320	Lime	-2155	Lime
-1335	Shale	-2170	Shale
-1360	Shale	-2175	Shale
-1380	Shale and Shells	-2205	Lime
-1390	Shale	-2250	Lime
-1395	Shale	-2255	Shale (Sandy)
-1415	Lime (hard)	-2320	Shale
-1420	Shale	-2325	Shale
-1455	Lime	-2340	Lime
-1460	Shale	-2365	Shale
-1465	Lime	-2375	Sandy
-1475	Lime	-2435	Shale
-1515	Shale	-2440	Lime
-1540	Shale	-2450	Shale
-1560	Lime	-2495	Shale
-1580	Lime	-2497	Lime (Top of K. C. at 2495)
-1591	Lime (hard)	-2500	Shale
-1600	Shale	-2510	Lime
-1625	Shale	-2550	Lime (1/2 BW at 2535)
-1630	Lime	-2625	Lime
-1645	Lime (hard)	-2630	Shale
-1650	Shale (black)	-2645	Lime
-1660	Lime	-2660	Lime
-1690	Lime	-2681	Lime
-1725	Shale (sandy)	-2686	Shale
-1735	Shale	-2696	Lime (Sandy - Sharp)
-1745	Lime	-2715	Shale
-1770	Lime	-2745	Shale
-1775	Shale	-2755	Lime

-2765 Shale
-2780 Shale
-2795 Lime
-2805 Shale
-2820 Shale
-2830 Lime
-2845 Shale
-2850 Lime
-2855 Shale
-2860 Lime
-2868 Shale
-2880 Lime
-2885 Shale
-2895 Shale and Shells
-2925 Shale
-2930 Shale
-2939 Lime
-2947 V. C. Shale
-2948 Lime
-2960 V. C. Shale
-2965 Miss. Lime
-2970 Lime
-2982 Chert
-2989 Lime and Chert
-2998 Chert
-3012 Chert
-3018 Chert and Lime
-3027 Chert
-3053 Lime
-3077 Lime
-3102 Lime
-3120 Lime (hard and sharp)
-3150 Lime
-3156 Lime
-3160 Lime
-3168 Shale
-3182 Lime
-3198 Shale
-3236 Lime
-3289 Top of Simpson - Actual
-3292½ NW - Total Depth