


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

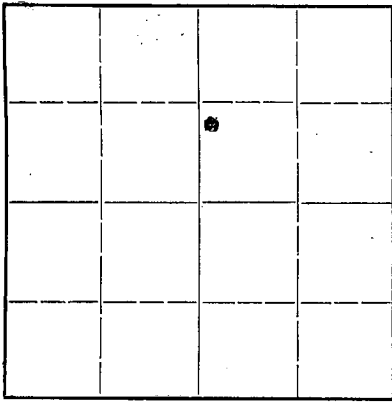

Locate well correctly on above
Section Plat

Sedgwick County, Sec. 30, Twp. 27, Rge. 2 (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NW cor. SW NE
Lease Owner K & P Oil Company
Lease Name Keys Well No. 4
Office Address Box 682 Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed Oct 18th 1930
Application for plugging filed October 1942
Application for plugging approved 1942
Plugging commenced November 1942
Plugging completed January 1943
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production July 1942
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well R.D. Williams
Producing formation Lime Depth to top 3254 Bottom 3256 Total Depth of Well 3256 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lime	Water	1400	1410	12 1/2	883	883
"	"	1825	1830	10	1628	1628
" Sdy	"	2100	2110	8	2956	2956
" "	"	2590	2605	7	3250	2965
Chat	Oil	2954	3025			
Lime	"	3070	3085			
"	"	3254	3256			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3256 feet to 3241 feet for each plug set.

Cement Plug from 3256 to 3241
Filled with Mud from 3241 to 115' Rock Bridge.
17 sacks cement Dumped filled with Mud 100% to 10'
Dumped 5 sacks cement to surface.

PLUGGING
FILE 30-27-22E
BOOK PAGE 64 LINE 27

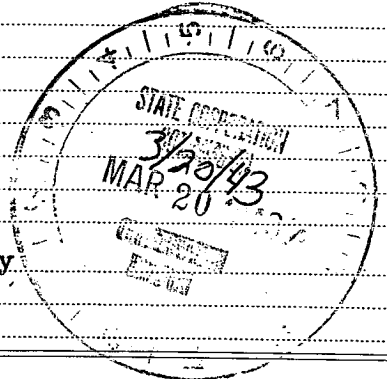

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to K & P Oil Company
Address Box 682 Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *[Signature]*

(Address)

SUBSCRIBED AND SWORN to before me this 19 day of March, 1943

[Signature]

Notary Public.




Location NW cor SW NE.

Sec. 30 T. 27 R. 2E.

Casing Record

10" 1628
20" 8 1/4" 2956
15 1/2" 65/8" 3250
12 1/2" 883 53/16"

Farm- Keys
Company- Vickers Petroleum Co. & Hinkle.
Contr.-
Comm.- 8/29/30.
County- Sedgwick.
No. 4
Comp.- 10/18/30



Total Depth 3256'.
Correspondence Regarding This Well Should Be Referred to

Figures Indicate Bottom of Formations.
Date Issued. 11/1/1930.

Elevation
Initial Production
Est 1,800 bbls.

Formation	Depth	Formation	Depth	Formation	Depth
cellar	10	shale & shells	1300	lime brkn	2837
slate blue	25	lime	1315	lime shells hrd	2843
sand 1/2 BW	30	shale & shells	1401	shale & shells	2865
shale blue	80	lime	1410	lime	2875
lime	90	1/2 BW 1400-1410'		shale & shells	2926
shale blue	100	shale blue	1420	lime shells hrd	2929
lime	110	lime	1440	shale & shells	2954
shale blue	115	shale	1460	top of chat	
shale	130	lime	1485	show oil	2954
lime	136	shale blue	1540	chat	3025
shale	145	lime	1590	sdv lime	3075
lime	165	shale blue	1600	show oil 3070-3085	
shale	170	slate drk	1627	brkn lime	3130
lime	195	lime	1685	shale blue	3165
shale	210	shale grey	1695	lime brkn	3187
shale	305	shale blue	1705	lime shells	3191
lime	325	sand	1715	lime shell hrd	3196
shale	350	shale	1730	slate black	3250
lime	365	lime	1750	sand Meisner	3254
sand	375	slate & shells	1765	shale green	3254 1/2
shale	400	brkn lime	1855	sand Viola lime	3256
lime 1 BW 470'	475	1 1/2 BW 1825-30		Total Depth	3256'
shale	515	lime	1930		
lime	530	shale blue	1938		
shale	540	lime	1980		
lime	570	shale & shells	2050		
2 BW 585 to 590'		shale	2100		
sand	595	lime sdv 1 BW 2100	2110		
red rock	605	shale blue	2165		
lime	620	lime	2230		
lime shells & shale	650	shale blue	2320		
shale	680	lime	2340		
lime	685	shale	2405		
shale	700	lime	2415		
lime	715	slate drk	2420		
shale	730	lime	2430		
lime	745	slate drk	2445		
shale	755	shale blue	2495		
lime hrd	765	top K. C. lime	2505		
shale	770	lime 1 BW 2535'	2565		
lime	795	lime sdv	2595		
shale	800	8 BW 2570'			
lime	815	lime	2605		
shale 1 BW 830'	845	lime sdv	2620		
lime	860	lime white very hrd	2630		
shale & shells	875	lime Base K.C.	2690		
lime	895	shale	2710		
shale	905	shale blue	2720		
lime	920	lime	2724		
shale	1000	shale blue	2740		
lime shells & shale	1045	shale	2755		
lime	1060	lime	2760		
shale	1105	shale blue	2765		
shale & shells	1255	lime	2783		
lime	1285	shale blue	2798		

30 27. 2E
LOOK 64 27