


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Sedgwick County. Sec. 11 Twp. 26 Rge. 2 (E) XXX  
Location as "NE/CNW/SW" or footage from lines SW SE SW  
Lease Owner Sohio Petroleum Company  
Lease Name Stollei Well No. 1  
Office Address Box 673, Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed April, 19 33  
Application for plugging filed December 16, 19 55  
Application for plugging approved December 19, 19 55  
Plugging commenced December 28, 19 55  
Plugging completed January 3, 19 56  
Reason for abandonment of well or producing formation Uneconomical

NORTH

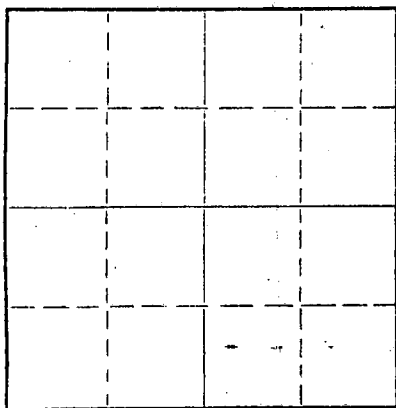

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production October, 19 48  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
Producing formation Viola Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3162' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	190	15-1/2		
		0	3065	6-5/8		120'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped 240 gallons sand up to 3098'. Dumped 200 gallons additional sand up to 3055'. Dumped 6 sacks cement on top of sand. Placed rock bridge 120' and dumped 30 sacks cement. Mudded hole to 14' and placed rock bridge on top of mud and dumped 10 sacks cement, filled up well to bottom of cellar.

RECORDED  
STATE CORPORATION COMMISSION  
JAN 9 1956  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Company  
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
J. H. Bond (employee of owner) ~~XXXXXXXXXXXX~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. H. Bond.

(Address)

SUBSCRIBED AND SWORN to before me this 6th day of January, 19 56

Devedott Brown  
Notary Public.

January 24, 1959



PLUGGING  
FILE SEC 11 T 26 R 2 E  
BOOK PAGE 34 LINE 36

WELL RECORD

Casing Recovery:  
 15-1/2" - 190' Left In  
 12-1/2" - 1385' Pulled  
 10" - 2205' Pulled  
 8-1/4" - 2840' Pulled  
 6-5/8" - 3065' Left In

Farm - Stollei #1  
 Company - J.A. Aylward  
 Commenced 3-21-33 Comp. 4-22-33  
 Elevation 1362'  
 Init. Prod. 150 BO

Location - Corner  
 SE/4 SE/4 of 11-26-  
 2E, Sedgwick Co., Ks.

<u>Formation</u>	<u>Depth</u>	<u>Formation</u>	<u>Depth</u>	<u>Formation</u>	<u>Depth</u>
Cellar	10	Lime	875	Lime	1710
Yellow Clay	45	Slate	885	Slate	1715
Slate	55	Lime	890	Lime	1730
Sandy Shale	60	Slate	900	Slate & Lime Shells	1760
H.F.W. from 55' to 60'		Slate	920	Lime	1800
Shale Blue	70	Slate	930	Slate	1810
Lime	75	Red Rock	930	Lime	1850
Slate	100	Slate 2	935	Slate	1865
Lime	135	Lime	940	Lime	1880
Slate	155	Slate	945	2 BWPH at 1870' to 1880'	
Lime	175	Red Rock	955	Slate	1900
Slate	180	Lime	970	Lime	1905
Lime	185	Red Rock	975	Slate	1935
Set 15 1/2" Casing at 190'		Slate	980	Lime	1940
Slate	215	Slate	985	Slate	1970
Lime	230	Slate	990	Shale	1980
Slate	255	Slate	995	Slate	2050
Red Rock	270	Lime	1000	Lime	2070
Lime	280	Slate	1010	Slate	2075
Lime	295	Lime	1015	Red Rock	2080
Slate	300	Slate	1030	Slate	2090
Lime	320	Lime	1035	Lime	2115
Slate	325	Slate	1050	Slate	2205
Lime	350	Lime	1055	Set 10" Casing at 2205'	
Slate	365	Slate	1065	Lime	2250
Lime	415	Lime	1070	1 1/2 BWPH at 2250-55'	
1/2 B.W.P.H. at 380'		Slate	1080	Sand	2255
Slate	430	Lime	1085	Lime	2285
Lime	440	Slate	1095	Slate	2300
Slate	450	Lime	1115	Lime	2335
Lime	460	Slate Dark	1120	Slate	2355
Slate	470	Lime	1130	Slate & Lime Shells	2385
Lime	485	Slate Dark	1140	Slate	2400
Slate	490	Lime	1145	Lime	2410
Lime	515	Slate Black	1155	Slate	2415
Red Rock	520	Lime	1185	Lime	2425
Slate	530	Slate	1200	Slate	2430
Lime	545	Lime	1215	Lime	2465
Slate	555	Slate	1230	Sandy Lime	2475
Lime	565	Lime	1250	4 BWPH from 2465-75'	
Slate	575	Slate	1255	Lime	2570
Lime	580	Lime	1265	Slate	2630
Slate	585	Slate	1350	Lime	2640
Lime	600	Lime	1360	Slate	2700
Slate	605	Sandy Lime	1382	Lime	2715
Lime	620	H.F.W. at 1360' to 1380'		Lime	2745
Slate	630	Lime	1395	Slate	2755
Lime	660	Slate	1398	Lime	2765
Slate	670	Set 12 1/2" casing at 1385'		Slate & Lime Shells	2810
Slate	675	Lime	1415	Lime	2814
Lime	705	Slate	1420	Slate	2818
Slate	720	Lime	1430	Varied Colored Shale	2840
Lime	735	Slate Dark	1445	8 1/4" Casing set at 2840'	
Slate	745	Lime	1465	Broken Chat	2854
Lime	755	Slate	1480	Chat	2855
Slate	760	Lime	1535	Sand	2865
Lime	790	Slate	1560	HFW at 2855-65'	
Slate	795	Lime	1585	Sandy Lime	2980
Lime	800	Slate	1590	Lime	3005
Slate	805	Lime	1605	Sandy Lime	3030
Lime	815	Slate	1610	Lime	3065
Slate	820	Lime	1615	Set 6-5/8" Casing at 3065'	
Lime	830	Slate	1620	Lime	3108
Slate	835	Lime	1635	Black Shale	3157
Lime	850	Slate	1645	Hole reduced from 6-5/8"	
Slate	855	Lime	1665	to 5-3/16" at 3143'	
Lime	860	Slate	1700	Oil Sand	3162
Slate	870	Lime			
		Slate			

**PLUGGING**  
 FOR SEC. 11 169026R 2E  
 ROCK PAGE 27 LINE 36 (Over)

I hereby certify that this is a true and correct log of the above described well, to the best of my knowledge.

\_\_\_\_\_  
Contractor

Subscribed and sworn to before me this  
at Wichita, Kansas, (Sedgwick County)

\_\_\_\_\_  
day of April, 1933,

\_\_\_\_\_  
Notary Public

My commission expires January 19, 1935.