


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

15-179-05177-00-00  
WELL PLUGGING RECORD

R

NORTH

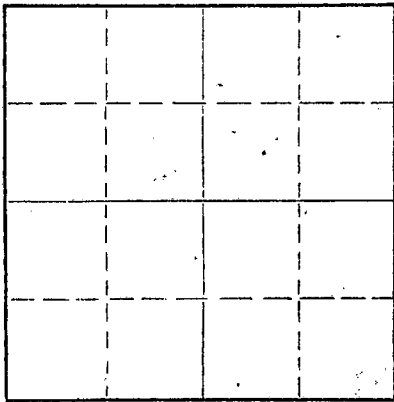

Locate well correctly on above  
Section Plat

Sheridan County. Sec. 23 Twp. 8S Rge. 27W (E) (W)

Location as "NE/CNW&SW&" or footage from lines. SW SW SW  
Lease Owner National Cooperative Refinery Association  
Lease Name TAYLOR Well No. 1  
Office Address 305 Rule Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed July 7 19 59  
Application for plugging filed August 7 19 59  
Application for plugging approved August 11, 19 59  
Plugging commenced October 7, 19 59  
Plugging completed October 9, 19 59  
Reason for abandonment of well or producing formation Depletion

If a producing well is abandoned, date of last production July 31, 19 59  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3901 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	273'	None-Cemented
				5-1/2"	3939'	1189'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Well plugged back to 3901 feet. Plugged back with sand from 3901' to 3800'. Mixed and dumped 3 sacks of cement from 3800' to 3776'. Pulled 1189' of 5 1/2" casing. Mudded from 3776' to 270'. Set 10' rock bridge from 270' to 185'. Mudded from 185' to 140'. Set 10' rock bridge from 140' to 30'. Mixed and dumped 10 sacks of cement from 30' to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 23 1959

CONSERVATION DIVISION  
Wichita, Kansas

11/23/59

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Ace Pipe Pulling Company  
Address Box 304, Great Bend, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
C. R. Sears (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. R. Sears (C. R. Sears)

305 Rule Building, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 20th day of November, 19 59

My commission expires November 26, 1960



Nell McComb

Nell McComb

Notary Public.

15-179-05177-00-00  
THE CARL TODD DRILLING COMPANY  
404 KFH Building  
Wichita, Kansas

National Cooperative Refinery Association  
#1 Taylor  
SW SW SW Sec. 23-8-27W  
Sheridan County, Kansas

COMMENCED: June 18, 1956  
COMPLETED: June 29, 1956

ELEVATION: 2531 Rotary Bushing

CASING RECORD

0 - 60	Surface clay and sand
60 - 70	Shale
70 - 272	Shale, sand, shale
272 - 1000	Shale
1000 - 1650	Shale, shells, sand
1650 - 1670	Shale and sand
1670 - 1800	Shale, shells, sand
1800 - 2175	Red Bed and sand
2175 - 2205	Anhydrite
2205 - 2310	Shale, shells
2310 - 2500	Shale, lime streaks
2500 - 2750	Shale, shells
2750 - 3070	Shale, lime
3070 - 3190	Lime, shale
3190 - 3355	Shale, lime
3355 - 3556	Lime
3556 - 3746	Lime
3746 - 3795	Lime
3795 - 3860	Lime
3860 - 3915	Lime
3915 - 3940	Lime
3940	Rotary Total Depth

8-5/8" OD 24# casing set at 272'  
cemented with 185 sacks cement,  
3 sacks CC

5-1/2" OD 15.5# casing set at  
3939' with 150 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION

AUG 10 1959

CONSERVATION DIVISION  
Wichita, Kansas

8/10/59

I hereby certify that the above is a true and correct log,  
to the best of my knowledge and belief.

THE CARL TODD DRILLING COMPANY

By:

*Carl Todd*

PLUGGING  
FILE SEC. 23 T. 8 R. 27 W.  
BOOK PAGE 58 LINE 24