

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-065-00702-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Graham County, Sec. 16 Twp. 9 Rge. 24 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE NE SE/4
Lease Owner E. K. Carey Drilling Co., Inc.
Lease Name John W. Super "A" Well No. 1
Office Address Box 620, McPherson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 12, 1955 19
Application for plugging filed June 11, " 19
Application for plugging approved June 11, " 19
Plugging commenced 6 A.M. June 12, " 19
Plugging completed 8:15 A.M. June 12, " 19
Reason for abandonment of well or producing formation Non Productive

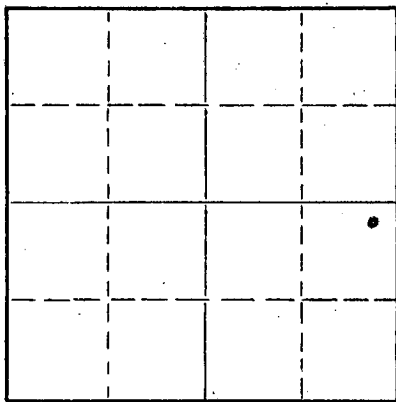

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hayes, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4640 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	214'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 200-155 feet to 40-10 feet for each plug set.

Gunned pits and circulated heavy mud on bottom. Layed down 1/2 of drill pipe and circulated heavy mud there, layed down all but 7 joints of drill pipe, ran measuring line and filled with heavy mud to 250 feet. Set bridge with wooden plug and 1/2 sack hulls and rock to hold weight of 7 joints drill pipe. Mixed 15 sacks cement and put on that bridge, ran measuring line and filled with heavy mud to 40 feet. Made bridge with wooden plug abd 1/2 sack hulls, mixed 10 sacks cement and filled to bottom of cellar floor. Through at 8:15 AM.


RECEIVED
STATE CORPORATION COMMISSION
JUN 14 1955
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor E. K. Carey Contractor
Address Box 620, McPherson, Kansas

STATE OF Kansas COUNTY OF McPherson, ss.
Arland Bruce, Tool Pusher (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Arland Bruce
Box 620, McPherson, Kansas
(Address)

Subscribed and Sworn to before me this 13th day of June, 1955
My commission expires November 13, 1956



PLUGGING
R1 SEC 16 T 9 R 24
PAGE 126 LINE 19

ROTARY DRILLER'S LOG

15-065-00702-00-00

2520 K.B.

E. K. Carey Drilling Co., Inc.
Box 620
McPherson, Kansas

Elevations: 2517 D.F.

John W. Super "A" #1

Casing Record:

NE NE SE/4
Sec. 16-9-24W
Graham County, Kansas

8-5/8" @ 214' w/150 sks.
Regular bulk cement and
200# cc.

Well Commenced: 5-26-55
Well Completed: 6-12-55 D & A

Contractor: E. K. Carey Contractor, Rig #1, Box 620, McPherson, Kansas
Geologist: Don Hollar, E. K. Carey Drlg. Co. 815 Central Bldg. Wichita

Figures Indicate Bottom of Formation K.3.

Base and cellar	8
Shale and shells	135
Sand	138
Shale	213
Shells	214
Shale and shells	600
Sand and shale	650
Shale	900
Shells, sand and shale	1130
Shale, shells and sand	1515
Shale and sand	1700
Sand	1950
Shale and shells	1980
Shale	2180
Anhydrite	2223
Shale and lime	2480
Lime and shale	2840
Lime	3056
Sandy lime and shale	3170
Lime	3420
Lime and shale	3490
Lime	3640
Lime and shale	3730
Lime	4101
Shale and lime	4375
Conglomerate	4384
Miss. Chat	4402
Lime	4534
Lime and chert	4560
Lime	4621
Arbuckle Lime	4640 TD

Geologist Tops:

Heebner	3830
Lansing	3870
Base K. C.	4099
Miss. chert	4395
Miss. Lime	4431
KHK	4490
Simpson	4576
Arbuckle	4616


DST - 4015 to 4055 or 40' anchor.
Tool open 30 min., very weak blow
died in 15 min. Closed 20 min. for
3HP. Recovered 30' drilling mud.
BHP 930# FFP 30# IFP 52#.

This is to certify that the above information is to the best of my knowledge true and correct.

SUBSCRIBED AND SWORN to before me this 13th day of June, 1955

E. K. CAREY CONTRACTOR

BY Herbert Rhoton
Herbert Rhoton, Superintendent

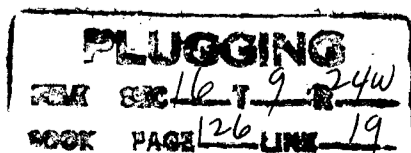

W. J. ...

My Commission Expires: November 13, 1956

NP