

15-065-00092-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

NORTH

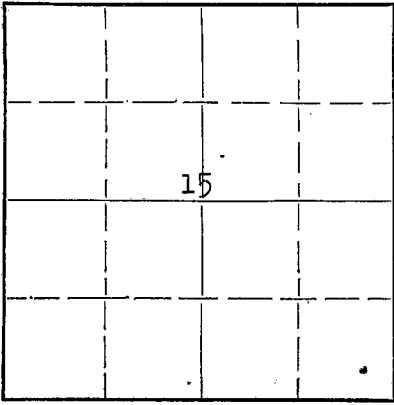

Locate well correctly on above Section Plat

Graham County. Sec. 15 Twp. 10 Rge. 21 (B) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE SE SE
Lease Owner. The Atlantic Refining Company
Lease Name. Miller Well No. 1
Office Address. Box 17, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. 4-4-19 49
Application for plugging filed. 4-4-19 49
Application for plugging approved. 4-4-19 49
Plugging commenced. 4-4-19 49
Plugging completed. 4-4-19 49
Reason for abandonment of well or producing formation. Dry

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Eldon R. Petty
Producing formation. Depth to top. Bottom. Total Depth of Well. 3844 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	276'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Heavy mud 3844 to 250' bridge
15 sacks cement 250' to 190'
Heavy mud 190' to 45'
15 sacks cement 45' to top

RECEIVED
APR - 7 1949
STATE CORPORATION COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. The Atlantic Refining Company
Address. Box 17, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Stanton K. Myers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stanton K. Myers
Box 17, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 6th day of April, 1949
My commission expires 7-29-51

Zila S. Bird
Notary Public.



PLUGGING
FILE SEC 15-T-10-R-31W
BOOK PAGE 90 LINE 11

F

Morlan Area

WELL RECORD

THE ATLANTIC REFINING COMPANY
 830 Kennedy Building
 Tulsa 3, Oklahoma

15-065-00092-00-00

Block or Twp. 10S-21W

Lease Miller
 Lease No. KS-11,458
 County Graham

Well No. 1
 State Kansas

Location SE SE SE of 15-10S-21W

Elevation 2187 Feet

Drilled { Contract
 Company Tools

Contracted Depth
 Completed Depth

Feet Date { Started 3-19-49
 Completed 4-4-49
 Deepened
 Cleaned Out

REACHED T.D.: 4-4-49

Name of Contractor Armer Drilling Co.

Contract Price Per Foot

Day Work

Well Estimated Cost
 Well Actual Cost

Method of Drilling Rotary

BEFORE SHOOTING

AFTER SHOOTING

Initial Production
 Settled Production

Flowing
 on Pump

Initial Production
 Settled Production

Flowing
 on Pump

Baume Test
 DRY HOLE

Water With Oil

%

Casing Record

Torpedo Record

SIZE SET PULLED

Date Company From To Feet Size of Shell Total Qts.

8-5/8" 276 ft. set at 285 ft.
 with 275 sax cement and 200#
 calcium chloride, circulated.

FORMATION	TOP	BOTTOM
Post rock & shale	0	90
Post rock & shale	90	170
Shale	170	240
Shale & shells	240	775
Sand	775	850
Shale & sand	850	890
Shale	890	1005
Shale & sand	1005	1075
Shale & shells	1075	1165
Sand	1165	1350
Sand & shale	1350	1430
Shale & shells	1430	1660
Lime	1660	1715
Shale & shells	1715	1735
Shale, lime, shells	1735	1920
Lime & shale	1920	2120
Shale & lime	2120	2260
Lime	2260	2285
Lime & shale	2285	2735
Lime	2735	2790
Lime & shale	2790	2865
Lime	2865	2915
Lime & shale	2915	2975
Lime	2975	2990
Lime & shale	2990	3310
Lime	3310	3724
Lime & shale	3724	3804
Lime	3804	3844

TOPS: Lansing 3467
 Arbuckle 3819

Dry hole. Plugged 4-4-49.

Heavy mud 3844 to 250' bridge
 15 sax cement 250' to 190'
 Heavy mud 190' to 45'
 15 sax cement 45' to top

04-20-1949

TOTAL DEPTH 3844

PLUGGING
 FILE SEC. 15 T. 10 R. 21 W.
 BOOK PAGE 90 LINE 11