

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Sedgwick County. Sec. 32 Twp. 28 Rge. 2 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from line CEL NW $\frac{1}{4}$ NE $\frac{1}{4}$

Lease Owner Beech Aircraft Corporation

Lease Name Schweitzer Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 23, 1944 1944

Application for plugging filed March 23 1944

Application for plugging approved March 23 1944


Plugging commenced March 23 1944

Plugging completed March 25 1944

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

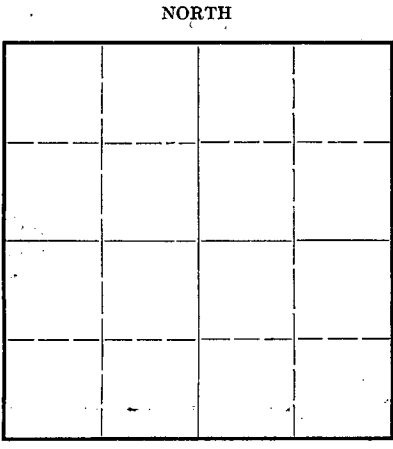

Name of Conservation Agent who supervised plugging of this well None

Producing formation None Depth to top Bottom Total Depth of Well 2240 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Shale	Water	45	50	12 $\frac{1}{2}$ "	72'	72'
Lime	Water	730	738	10"	750'	750'
Lime	Water	1410	1420	8"	1447'	1447'
Lime	Water	2060	2090	6"	2112'	2112'
Sand	Gas & water	2219	2222			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Cemented bottom of hole to 2185'. Cement dumped with bailer. Mudded entire hole up to 120' and cemented at this point with five sacks of cement. Remainder filled with mud and cemented with five sacks cement at bottom of cellar.

PLUGGING
FILE 32 28 2E
BOOK PAGE 112 LINE 5

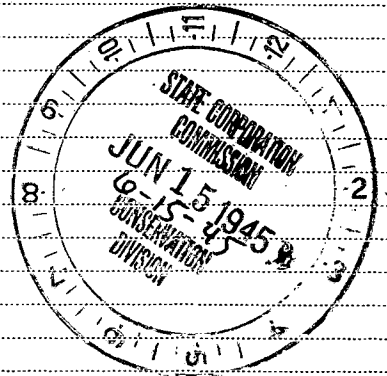

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Beech Aircraft Corporation
Address Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. W. G. Talbott (employee of owner) or (~~owner or operator~~) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. G. Talbott

Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of June, 1945.

My commission expires July 31-1945

Notary Public.

Beech Aircraft Corporation
Schweitzer No. 1

CEL NW NE
Sec. 32 T. 28 R. 2E
Sedgwick County

Total Depth: 2240
Comm: 2-23-44 Comp: 3-27-44

Contractor: Cox and Burns

Casing:
71' of 10"

Elevation: 1320
Production: Dry

Figures Indicate Bottom of Formation

subsoil	30	lime	895
sand	35	shale	900
shale	45	lime	905
water	50	shale	915
shale blue	60	shale	950
shale	78	lime	955
lime	110	shale	1020
shale	130	lime	1025
shale	140	shale	1040
lime	150	lime	1045
shale	160	shale	1100
lime	185	lime	1105
shale	200	shale	1135
red rock	205	shale	1140
lime	215	lime	1145
shale	220	shale	1180
lime	225	broken lime	1195
shale	245	lime	1205
lime	250	shale	1210
shale	265	lime	1235
lime	270	shale	1260
shale	280	lime	1275
lime	315	shale	1290
shale	320	lime	1300
red rock	330	shale	1310
shale	345	lime	1320
lime	490	shale	1335
shale	510	lime	1340
lime	525	shale	1405
shale	535	lime	1425
red rock	540	shale	1430
shale	555	lime	1440
lime	585	slate	1447
red rock	594	shale	1450
lime	600	shale	1460
shale	605	lime	1470
lime	610	shale	1480
shale	615	lime	1490
lime	620	shale	1535
shale	635	lime	1575
lime	650	shale	1630
shale	665	lime	1690
lime	685	shale	1730
shale	695	lime	1740
lime	700	shale	1755
shale	710	lime	1760
lime	720	shale	1765
shale	728	shale	1815
lime	740	lime	1835
shale	760	shale	1860
lime	770	lime	1885
shale	780	shale	1895
lime	790	lime	1975
shale	800	shale	2000
lime	805	lime	2015
shale	815	shale	2055
lime	825	sand	2060
shale	835	sandy lime	2090
lime	855	shale	2140
shale	865	sandy shale	2184

PLUGGING
SEC 32 T. 28 R. 2E
PAGE 112 LINE 5

JUN 15 1945
SPEL...

Schweitzer No. 1
Continued

shale	2219
sand	2222
lime	2240

Total Depth

PLUGGING
FILE SEC. 22 289 2E
BOOK PAGE 112 LINE 5

