


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Ellis County. Sec. 30 Twp. 11 Rge. (X) 17 (W)  
Location as "NE<sup>1</sup>/<sub>4</sub>NW<sup>1</sup>/<sub>4</sub>SW<sup>1</sup>/<sub>4</sub>" or footage from lines. 660' from South line, 330' (from east line)  
Lease Owner Champlin Refining Co.  
Lease Name Hadley A Well No. 2  
Office Address P.O. Drawer #552 Enid, Oklahoma.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed. May 26, 1944  
Application for plugging filed. May 27, 1944  
Application for plugging approved. May 27, 1944  
Plugging commenced. June 2, 1944  
Plugging completed. June 2, 1944  
Reason for abandonment of well or producing formation.....

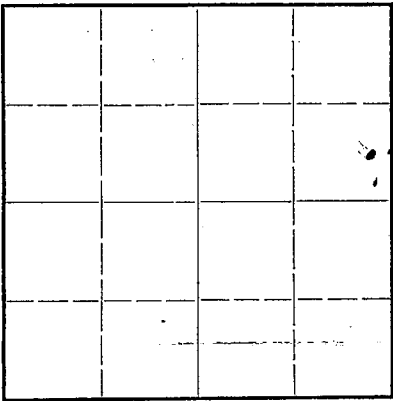

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production..... 19.....  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes  
Name of Conservation Agent who supervised plugging of this well Mr. E. R. Petty  
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3679 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from..... feet to..... feet for each plug set.


Total depth 3679'. Filled hole with heavy mud from total depth, 3679', to 1150' and set cement plug, 15 sacks, from 1150' to 1103'. Filled hole with mud from 1103' to 46' and set cement plug using 10 sacks of cement to fill hole from 46' to 15' and filled with mud from 15' to top. Used Halliburton for running mud and cement.

Casing left in hole:

1240' of 8 5/8" OD Armeo Spiral Weld Slip joint casing.  
1184' of 4 1/2" OD 9.50# 8 rd. thrd. Pitts. casing.

(Total run in hole was 3625' 7" and we recovered 2440' 11". Balance left in well.)

**PLUGGING**  
FILE 30-11-17W  
BOOK PAGE 128 LINE 3

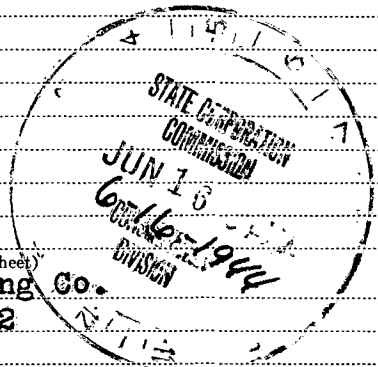

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to Champlin Refining Co.  
Address P.O. Drawer #552 Enid, Oklahoma.

STATE OF Oklahoma, COUNTY OF Garfield, ss.  
H. Wentworth (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. Wentworth

Enid, Okla  
(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of June 19 44

My commission expires May 25 - 1946  
Jane Bee Notary Public.  
20-1300-s 11-43-10M

WELL RECORD 15-051-03646-00-00

N

		30			

COUNTY Ellis SEC. 30 TWP. 11 RGE. 17W

COMPANY OPERATING Champlin Refining Co.

OFFICE ADDRESS Enid, Oklahoma

FARM NAME Hadley WELL NO. A-2

WELL LOCATED SE $\frac{1}{4}$ , SE $\frac{1}{4}$ , NE $\frac{1}{4}$

Date commenced 4-8-44

Date completed 6-3-44

CHARACTER OF WELL Dry Hole


CASING RECORD

SIZE	WT.	THDS.	MAKE	FT.	IN.	AMOUNT PULLED	CEMENT
8/8	3 Ga.	Welded	Armco	1240		None	325 Sacks
				3607			
4 1/2	9.5	8	Pittsburg			2440	150 "

FORMATION RECORD

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Shale	Top	400			
Shale, Sand, & Shells	400	1235			
Red Rock	1235	1330			
Anhydrite	1330	1365			
Shale & Shells	1365	2050			
Broken Lime	2050	2133			
Shaley "	2133	2240			
Lime	2240	2620			
Shale & Lime	2620	2910			
Lime	3110	3510			
Shale & Lime	3510	3605			
Conglomerate	3605	3610			
Lime (Cored)	3610	3617	(Small Show Oil)		
Arbuckle Lime	3617	3659			
Arbuckle Lime (Sandy)	3659	3679	(1 1/2 boilers water per hour).		

Geological Tops:  
Top Sooy = 3600 D.F.  
Top Arbuckle = 3604 D.F.

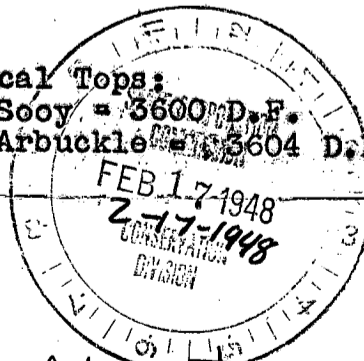

Subscribed and sworn to before me this 27 day of July 1942

D. E. Miller  
Notary Public

H. C. Wentworth  
Superintendent.

**PLUGGING**  
FILE SEC 30 T 11 R 17W  
BOOK PAGE 170 LINE 13