

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS


WELL PLUGGING APPLICATION FORM

Lease Owner Deep Rock Oil Corporation Address Atlas Life Bldg., Tulsa, Okla.
(Applicant)
Lease (Farm Name) Odaffer Well No. #8
770' N of S,
Well Location 885' E of W, NW/4 Sec. 14 Twp. 21 Rge. 20 (E)-(W)
SW-DE-50-NW
County Anderson Field Name (if any) Bush City Shoestring
Total Depth 806' 4" Oil x Gas Dry Hole
Was well log filed with application? No . If not, explain:
See well log on back of Plugging Record

Date and hour plugging is desired to begin 8 A.M. 11/28/50 .
Plugging of the well will be done in accordance with the Rules and
Regulations of the State Corporation Commission, or with the approval
of the following exceptions: Explain fully any exceptions desired.
(Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner
Clyde Crozier Address Garnett, Kansas
Name of Plugging Contractor Nickels Drilling Company
Address Garnett, Kansas

Invoice covering assessment for plugging this well should be sent to
Deep Rock Oil Corporation Address Box 127, Osawatomie, Kansas
and payment will be guaranteed by applicant.



RECEIVED
STATE CORPORATION COMMISSION

DEC 11 1950

CONSERVATION DIVISION

Deep Rock Oil Corporation
Applicant or Acting Agent

Date 11/27/50



STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

December 11, 1950

Well No.	8
Lease	Odaffer
Description	SW NE SW NW 14-21-20E
County	Anderson
File No.	47-35

Deep Rock Oil Corporation
Box 127
Osawatomie, Kansas

Gentlemen:

This letter is your authority to plug the above subject well, in accordance with the Rules and Regulations of the State Corporation Commission. When you are ready to plug this well, please contact our District Plugging Supervisor, Mr. A. E. Daniel, 229 W. 7th, Jernett, Kansas.

STATE CORPORATION COMMISSION
CONSERVATION DIVISION

BY:

J. P. Roberts
J. P. ROBERTS

cc: DISTRICT PLUGGING SUPERVISOR

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SW NW

SEC. 14 TWP. 21 RGE. 20 E

Dry Hole _____ Abandoned Oil Well Yes Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. # 8 Lease Odaffer

Operator Deep Rock Oil Corp Address Atlas Bldg Tulsa 2 Okla

Field Bush City County Anderson

Total Depth 806 Feet.

(Describe briefly the manner in which the well was plugged)

Cement from 758 to 600

Bridge placed 200

3 sacks of cement placed on Bridge a pprox 10 ft
Hole filled to top with soil and stone and leveled
wit surface

RECEIVED
STATE CORPORATION COMMISSION
DEC 11 1950


PLUGGING

FILE SEC 14 T 21 R 20E
BOOK PAGE 47 LINE 35

A. R. Daniel
District Conservation Agent

Date 12 - 8 - 50

WELL PLUGGING RECORD

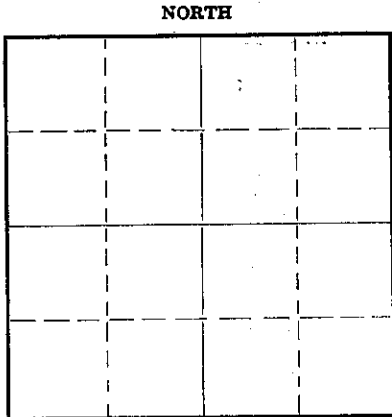

Locate well correctly on above
Section Plat

Anderson County. Sec. 14 Twp. 21 Rge. 20 (E) (W)
Location as "NE/CNW4SW4" or footage from lines 770' N of S, 885' E of W, NW/4
Lease Owner Deep Rock Oil Corporation
Lease Name Odaffer Well No. #8
Office Address Atlas Life Bldg., Tulsa 2, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed March 17, 1924
Application for plugging filed 11/27/50
Application for plugging approved
Plugging commenced 11/28/50
Plugging completed 11/30/50
Reason for abandonment of well or producing formation Off location for use in
our waterflooding program.
If a producing well is abandoned, date of last production 11/25/50
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well A. R. Daniel
Producing formation Squirrel Sand Depth to top 785' Bottom 801' Total Depth of Well 806' 4" Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Broken Sand		759'	785'	6 1/2"		758' 10"
Oil Sand	Oil	785'	801'	10"		16' 5"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was cemented from 758' 10" T.D. to 600' with 40 sacks of cement
Bridge placed at 200'
3 sacks of cement placed on bridge
Hole filled to surface with soil and stones.

See over for well log.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Deep Rock Oil Corporation
Address Box 127
Osawatomie, Kansas

STATE OF Kansas, COUNTY OF Miami, ss.
T. N. Henderson (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) T. N. Henderson
1123 Brown Avenue, Osawatomie, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of December, 1950

My commission expires Jan. 1, 1952

22-5133-s 9-48-10M

PLUGGING
FILE SEC 14 T 21 R 20E
BOOK PAGE 47 LINE 35

Notary Public.

Thickness
of Strata

Formation

Total
Depth

0'	Boulders	17'
10	Shale	27
2	Lime	29
148	Shale	177
31	Iola Lime	208
12	Shale	220
6	Lime	226
14	Shale	240
5	Lime-L	245
10	Shale-B	255
10	Lime-L	265
15	Shale-B	280
10	Lime-Gray	290
7	Shale-B	297
40	Lime	337
4	Shale-D	341-Water
23	Lime	364
5	Shale-D	369-Water
13	Lime	382
8	Shale-W	390
2	Lime	392
25	Shale-W	417-
143	Shale-W	560
4	Red Rock	564
6	Shale-W	570
8	Lime-H	578
52	Shale-W	630
12	Lime	642
3	Shale	645
2	Lime	647
8	Shale	653
7	Lime	662
13	Shale-D	675
10	Shale-D	685
3	Lime	688
2	Shale-D	690
2	Lime	692
18	Shale-D	710
2	Lime	712
5	Shale-Lime	717
32	Shale-D	749
6	Shale-L	755
4	Shale-L	759
26	Sand-Broken	785
16	Oil Sand	801
7	Shale	808