

15-195-01469-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Trego County. Sec. 10 Twp. 11 Rge. (E) 23 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines Center SE $\frac{1}{4}$ of SE $\frac{1}{2}$
Lease Owner. Watchorn Oil & Gas Company,
Lease Name. Lemke Well No. 1
Office Address. 2715 First National Bldg., Oklahoma City, Okla.
Character of Well (Completed as Oil, Gas or Dry Hole)
Date, well completed. ~~February 24, 1945~~ May 13, 1945. 193
Application for plugging filed. October 31, 1940. 193
Application for plugging approved. Nov. 6, 1940. 193
Plugging Commenced. ~~Nov. 5, 1940~~ Nov. 5, 1940. 193
Plugging Completed. Nov. 7, 1940. 193
Reason for abandonment of well or producing formation. Exhausted.

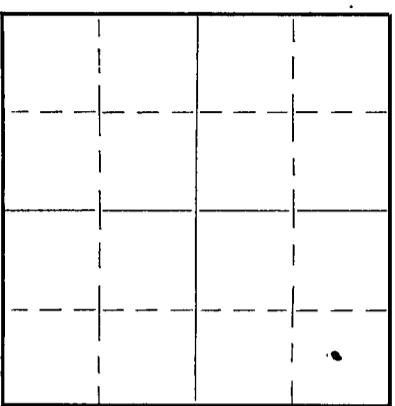

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production. 193
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes.

Name of Conservation Agent who supervised plugging of this well. C. T. Alexander
Producing formation. ~~None~~ Lime Depth to top. 3694 Bottom. 3700 Total Depth of Well. 4025 Feet.
Show depth and thickness of all water, oil and gas formations. Plugged back to 3710.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lime	Oil	3694	3700			
Sand	Water	4005	4014	12"	105	None
	Rotary hole	to 3650		7" C.D.	3650	2600

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Mud 3710 to 3704
Cement 3704 to 3689
Mud 3689 to 3600
Cement 3600 to 3585
Mud 3585 to 225
Cement 225 to 210
Mud 210 to 14
Cement 14 to 8 ft., mud to surface.

10 11 23W
122 12



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Watchorn Oil & Gas Company,
Address. 2715 First National Bldg., Okla. City, Okla., or Box 452,
WaKeeney, Kansas.

STATE OF KANSAS, COUNTY OF TREGO, ss.
Leo Burris, (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo Burris

WaKeeney, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of November, 1940.

My commission expires Jan 18 1943

A. J. Peacock

Notary Public.

Drilled by Alma Oil Company 660 feet West of the East line and 660 feet North of the South line in Southeast Quarter of the Southeast Quarter of Section 10, Township 11, Range 23, Trego County, Kansas.

Elevation: 2241 feet.

Drilling commenced January 24, 1935, drilling completed May 13, 1935.

Shale & shells	0 - 1065
Red bed	1065 - 1100
Shale, red bed	1100 - 1200
Shale	1200 - 1220
Sand	1220 - 1445
Shale	1445 - 1590
Sarl & shale	1590 - 1610
Shale & shells	1610 - 1690
Shale	1690 - 1714
Lime	1714 - 1742
Shale & shells	1742 - 1840
Sarl	1840 - 2235
Shale & shells	2235 - 2290
Shale	2290 - 2410
Shale & shells	2410 - 2490
Shale-	2490 - 2635
Shale & shells	2635 - 2705
Shale	2705 - 2800
Shale & shells	2800 - 2850
Shale	2850 - 2890
Shale & lime	2890 - 2950
Shale & shells	2950 - 3075
Broken lime	3075 - 3125
Lime	3125 - 3210
Shale & lime	3210 - 3245
Shale	3245 - 3265
Lime	3265 - 3400
Shale	3400 - 3415
Lime	3415 - 3460
Shale	3460 - 3475
Lime	3475 - 3550
Shale	3550 - 3664
Brown shale	3664 - 3666
Lime	3666 - 3676
White lime	3676 - 3680
Red & green shale	3680 - 3689
Lime	3689 - 3703
Show of oil from 3594 to 3700.	
Shale	3703 - 3708
Shale & lime	3708 - 3711
Lime & chert	3711 - 3716
White lime	3716 - 3720
Red shale & red lime	3720 - 3736
White lime	3736 - 3750
Shale	3750 - 3760
Lime, shale, & red shells	3760 - 3775
White lime	3775 - 3782
Red shells & sand	3782 - 3790
Lime	3790 - 3796
Red lime	3796 - 3801
Lime & broken shale	3801 - 3834
Lime & shells	3834 - 3851
Lime	3851 - 3877
Shale & lime shells	3877 - 3907
Lime soft	3907 - 3915
Shale	3915 - 3930
Brown lime chert	3930 - 3985
Shale	3985 - 3995
Brown lime chert	3995 - 4005
Sand, water, hole full	4005 - 4014
Lime, hole plugged	4014 - 4023

CASING RECORD

6" casing set at 7540'

Plugged hole back
to 3710.....Total Depth