


15-163-00765-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

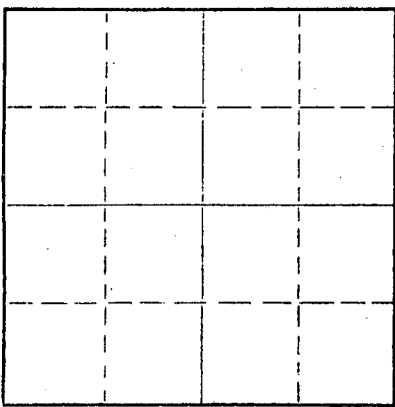

Locate well correctly on above
Section Plat

Rooks County. Sec. 14 Twp. 10 Rge. (E) 16 (W)
Location as "NE/CNW/SW" or footage from lines C NW SW NW
Lease Owner Cities Service Oil Co.
Lease Name Rogers Well No. 1
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 5/9/58 19
Application for plugging filed 5/9/58 19
Application for plugging approved 5/15/58 19
Plugging commenced 5/9/58 19
Plugging completed 5/9/58 5/18/58 19
Reason for abandonment of well or producing formation RT KCC

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Don Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3520 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------|--------|------------|
| | | | | 8-5/8 | 320' | none |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with heavy mud to 300', ran Howco wood plug and 1/4 sx hulls at 300', spot 25 sx cement thru drill pipe at 300', fill hole to 40' of top with heavy mud. Plug and 1/4 sx hulls at 40'; 10 sacks cement to surface.

RECEIVED
CORPORATION COMMISSION
5-28-58
MAY 28 1958

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lohmann & Johnson
Address Evansville, Indiana


STATE OF KANSAS, COUNTY OF BARTON, ss.
M. M. Hardin (employee of owner) ~~operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin

Box 553, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of May 1958

My commission expires March 12, 1959

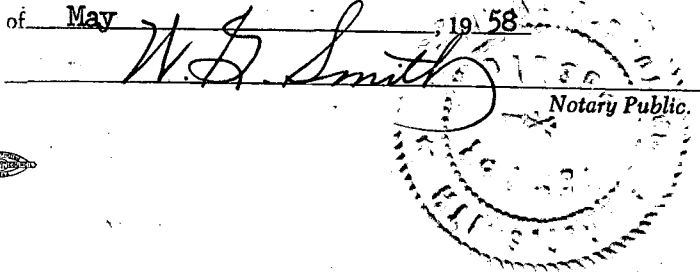

PLUGGING
FILE SEC. 14 T. 10 R. 16W
BOOK PAGE 100 LINE 28

WELL RECORD

WILDCAT.....

DISCOVERY.....

POOL.....

COMPANY Cities Service Oil Co. WELL # 1 FARM Rogers

LOCATION 990' North and 330' East of W/4 Corner

Section 14, Township 10, Range 16W.

ELEV. 1912 (1909 Gr.) CO. Rooks STATE Kansas

IP. Dry hole. P. & A. May 8, 1958.

PERFS.....

FRAC..... ACID None

T.D. 3520' P.B.T.D..... GRAV/GOR.....

DRLG. COMM. April 25, 1958 COMP. May 8, 1958 CONTRACTOR Lohmann-Johnson Drlg. Co.

CASING RECORD:

8-5/8" at 320' with 225 sacks cement.

FORMATION RECORD:

| | |
|-----------------------|-----------|
| sand and shale | 0-320 |
| shale | 1105 |
| anhydrite | 1134 |
| shale and lime | 1770 |
| lime | 2124 |
| lime and shale | 2260 |
| lime | 2518 |
| shale | 2653 |
| lime and shale | 2742 |
| shale and lime | 2820 |
| lime | 3271 |
| lime and shale | 3322 |
| lime | 3424 |
| lime and conglomerate | 3437 |
| lime | 3475 |
| conglomerate and lime | 3516 |
| lime | 3520 T.D. |

| | |
|------------------|------|
| Topeka | 2804 |
| Heebner | 3039 |
| Dodge | 3063 |
| Lansing | 3085 |
| Base Kansas City | 3361 |
| Conglomerate | 3428 |
| Arbuckle | 3490 |
| Pen. | 30' |
| T.D. | 3520 |

D.S.T. 2826-50, open 1 hour, recovered 37' slightly oil-cut mud; B.H.P. 850# in 30 minutes.

D.S.T. 3045-76, open 1 hour, recovered 14' mud; B.H.P. 85# in 45 minutes.

D.S.T. 3090-3106, open 1 hour, recovered 9' mud with trace oil; B.H.P. 33# in 45 minutes.

D.S.T. 3109-30, open 1 hour, recovered 42' watery mud; B.H.P. 1120# in 45 minutes.

D.S.T. 3243-71, open 1 hour, recovered 12' mud; B.H.P. 350# in 45 minutes.

D.S.T. 3416-37, open 1 hour, recovered 22' mud; B.H.P. 215# in 45 minutes.

Slope Tests (Syfo):

| | |
|-------|------|
| 500' | - 1° |
| 1000' | - 1° |
| 1500' | - 0° |
| 2000' | - 0° |
| 2500' | - 1° |
| 3000' | - 1° |

7-7/8" Rotary Hole

RECEIVED

CONSERVATION COMMISSION

MAY 28 1958

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING

FILE SEC. 14 T. 10 R. 16W
BOOK PAGE 100 LINE 20