


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
~~FORMATION PLUGGING RECORD~~

Strike out upper line
when reporting plug-
ging off formations.

NORTH

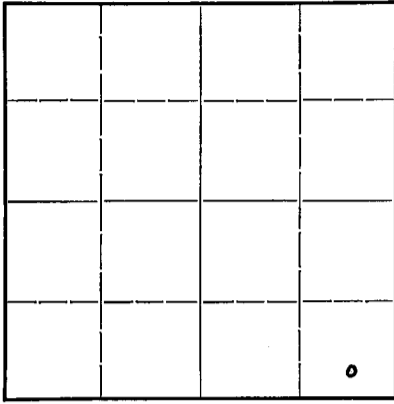

Locate well correctly on above
Section Plat

Wallace County, Sec. 22, Twp. 11S, Rge. (E) 39 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE SE, 330' fm Sth & 660' fm East
Lease Owner Sinclair Prairie Oil Co
Lease Name F.E. Wallace Well No. 1
Office Address Box 521, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) twisted off drill pipe, had to abandon the hole.
Date, well completed Sept. 13, 1942 19
Application for plugging filed October 16, 1942 19
Application for plugging approved October 10, 1942 19
Plugging Commenced October 7, 1942 19
Plugging Completed October 7, 1942 19
Reason for abandonment of well or producing formation Twisted off drill pipe, and had to abandon the hole.
If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C.T. Alexander
Producing formation - Depth to top - Bottom - Total Depth of Well 4094 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
No records of formations						
Wildcat well supervised by Geological Dept.						
				9-5/8" OD	307'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
4-1/2" drill pipe twisted off at 2170' (2199' left in hole) Mud & drill pipe TD to 2240'
Cement plug - 30 sx 2240- 2165'
Mud 2165'- 40'
Cement plug - 10 sx 40 - 25'
Mud to bottom of cellar
Welded steel cap over top of surface csg at bottom of cellar.

PLUGGING
FILE SEC-22-T-11-R-37W
BOOK PAGE 52-LINE 37

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Victor Chancellor, Supt.
Address Box 774, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

I, Victor Chancellor (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Victor Chancellor

Box 774 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 7th day of October, 1942

My commission expires 6-14-43

Notary Public

WELL LOG.

Wallace Investment Well #1.
SE/4 SE/4 : 22-11S-39W
330' from South & 660' from
East Line, Wallace Co, Kansas.

Started-6-30-42
Completed 10-7-42
Drilled By:
Harbar Drilling Co.

Sand 0 to 15
Shale & Shells 257
Set 15" OR Casing @ 241'
Shale & Shells 1135
Lime 1175
Shale & Shells 1715
Shale & Sand 1875
Shale & Shells 1980
Lime & Sand 2025
Green Shale & Shells 2085
Lime 2125
Shale & Anhydrite 2200
Shale & Lime 2265
Red Bed & Lime Shells 2710
Lime 2745
Red Bed & Shells 2905
Lime 2920
Red Bed & Shells 3045
Lime 3070
Red Bed & Shells 3135
Lime 3160
Shale & Lime Shells 3325
Sand 3355
Red Bed 3380
Lime 3610
Red Bed & Shells 3630
Lime 4070

Lime 3180
Red Bed & Shells 3330
Hard Sand & Red Bed 3365
Shale & Red Bed 3405
Lime & Shale 3463
Lime 3547
Sandy Shale 3563
Red Shale 3574
Lime 3585
Red Rock 3590
Lime 3603
Shale & Lime 3675
Lime 3710
Lime 3768
Shale & Lime 3802
Lime 3840
Lime & Shale 3880
Lime 4094
Twisted off drill pipe @ 3485'
9-13-42. Circulated Oil & worked
Drill pipe. Washed over drill
pipe to 2199. Could not recover
drill pipe & hole abandoned. 30
sax cement dumped 2240 to 2165'
Mud to 40' and cement plug to 25'
Mud to top of hole and capped.
Abandoned 10-7-42.

Twisted off drill pipe @ 2369'
7-16-42. Fished for stuck pipe
until 8-1-42. Could not recover
pipe. Run cement plug @ 2020'.
Run drill pipe in on 8-4-42, did
not find plug at 2020' but at 2464'.
Run 200 sacks cement @ 2464' on 8-5-42.
On 8-9-42 run drill pipe found cement
@ 2430' on 8-10-42 run 20 sax Cal seal
top of plug at 2024'. Let Calseal set
3 hrs and run 75 sax cement to 1997'.
Run 100 sax cement & 150 lbs Calcium
Chloride to 1847'. On 8-15-42 drilled
10' of cement, set Eastman Whipstock
@ 1957'.

Drilled by Whipstock 1957
Shale & Sand 1969
Reamed to 9" hole 1969
Shale & Shells 1985
Green Shale & Shells 2045
Shale 2085
Lime 2105
Lime & Shale 2155
Shale & Anhydrite 2240
Anhydrite 2260
Red Bed 2280
Red Bed & Shells 2285
Anhydrite 2315
Red Bed & Lime Shells 2585
Red Bed & Anhydrite 2610
Red Bed & Shells 2730
Lime 2750
Red Bed & Shells 3030
Lime & Shale 3070
Lime & Red Bed 3135

3870
3422
-458

PLUGGING
FILE SEC 22-T-11-R-39W
BOOK PAGE 52-LINE 37

10-28-1942
OCT 28 1942