

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out/upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

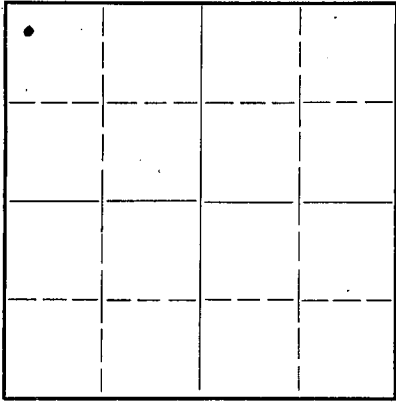

Locate well correctly on above Section Plat

Ottawa County. Sec. 20 Twp. 12 Rge. 2 (E) E (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NW 1/4 NW 1/4 NW 1/4

Lease Owner Auto-Ordnance Corporation

Lease Name Gekler

Office Address 517 Union Nat'l Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 15 19 43

Application for plugging filed July 15 19 43

Application for plugging approved July 15 19 43

Plugging commenced 8 a.m. July 15 19 43

Plugging completed 2:30 p.m. July 15 19 43

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production Non-productive 19 43

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation - - - Depth to top - - - Bottom - - - Total Depth of Well 3509' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lime				10-3/4" OD	203 (cemented)	None
Top Kansas City Lansing	Dry	2190'				
Top Mississippi Dolomite	"	2685'				
Top Viola	"	3272'				
Top White Crystalline Viola	"	3286'				
Top Simpson Sand	"	3422'				
Top Arbuckle	"	3478' to 3509'				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole was filled with mud from 3509' back up to within 203' of surface hole. Wooden bridge set at 203'. Fifteen sacks of cement placed on top of this plug. Hole was then filled with mud to within fifteen feet of top of surface pipe, and a wooden bridge set at this depth and filled with cement to top of surface pipe.

PLUGGING RECORD
FILE SEC 20 TWP 12 RGE 2
BOOK PAGE 82 LINE 38

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Auto-Ordnance Corporation

Address 517 Union Nat'l Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Sage W. Bee

517 Union National Bank Bldg. Wichita, Kans (Address)

SUBSCRIBED AND SWORN to before me this 26th day of July, 19 43

Scott Slusky Notary Public.

My commission expires 2-2-1944



Gekler #1
NW/4 NW/4 NW/4 of Section 20-12S-2W
Ottawa County, Kansas
Auto-Ordinance Corporation
And
Helmerich & Payne, Inc.

Commenced: June 15, 1943
 Completed: July 15, 1943

Surface clay	0	50 :
Shale and shells	50	193
Broken shells	193	210
Lime shells and shale	210	408
Sand rock	408	575
Lime	575	660
Shale and shells	660	770
Lime and shale	770	995
Shale and shells	995	1158
Shale	1158	1345
Shale and shells	1345	1515
Shale	1515	1600
Lime	1600	1615
Shale and shells	1615	1718
Shale	1718	1838
Lime	1838	1845
Shale	1845	1960
Salt	1960	1965
Broken lime	1965	1970
Shale	1970	2012
Lime, soft	2012	2045
Lime	2045	2135
Shale and lime	2135	2215
Shale	2215	2260
Lime	2260	2351
Lime and shale	2351	2406
Lime	2406	2410
Shale	2410	2685
Chat	2685	2690
Chat and Miss. lime	2690	2741
Chat	2741	2905
Shale	2905	3060
Hunton lime	3060	3125
H. Lime and chert	3125	3149
Lime	3149	3160
Shale	3160	3190
Lime, broken	3190	3195
Shale	3195	3208
Shale and chert	3208	3221
Shale	3221	3285
Lime	3285	3423
Shale	3423	3438
Sand	3438	3452
Lime	3452	3509
TOTAL DEPTH	3509	

CASING RECORD

10-3/4" Casing set at 203' and cemented with 175 sacks of cement.

PLUGGING
 FILE # 20 12224
 BOOK PAGE 82 NO. 38

STATE OF OKLAHOMA)
 COUNTY OF TULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Gekler Well #1, located in the Northwest Quarter of the Northwest Quarter of the Northwest Quarter of Section 20, Township 12 South, Range 2 West, Ottawa County, Kansas.

HELMERICH & PAYNE, INC.

By William Woodhurst
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 26th day of July, 1943.

Lee Shipper
 Notary Public

My commission expires July 22nd, 1947

7-31-1943