

15-167-00238-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Russell County. Sec. 22 Twp. 12 Rge. 14 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SW SW SW

Lease Owner. Franco Central Oil Company

Lease Name. Wagner Well No. 1

Office Address. 306 Fourth Nat'l. Bk. Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole

Date well completed. 12-22-49 19. 50

Application for plugging filed. July 16, 19. 50

Application for plugging approved. July 20, 19. 50

Plugging commenced. August 7, 19. 50

Plugging completed. August 12, 19. 50

Reason for abandonment of well or producing formation.

If a producing well is abandoned, date of last production. 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Mr. Eldon Petty

Producing formation. Kansas City Depth to top. Bottom. 3269' Total Depth of Well. 3269' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	Water	3261	3269	8 5/8	200'	None
Kansas City	Water	3170	3176	5 1/2	3258'	2,609'
Kansas City	Water	2900	3002			
Topeka	Water	2684	2692			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Lane Wells Plug set 3,030' - Bridged hole with Chat from 3,030' to 2,670' - Run 4 sacks of cement - filled from 2,670' to 2,650' - Shot pipe loose at 2,594' - pulled same. Tilled hole with mud from 2,650 to 210 ft. Put rock bridge in hole at 210 feet. Run 15 sacks of cement on rock bridge 210' to 160'. Filled hole with mud from 190' to 40'. Run 10 sacks cement from 40' to surface.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to.....
Address.....

STATE OF KANSAS, COUNTY OF SEDGWICK
L. M. CLOTHIER (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. M. Clothier*

306 Fourth National Bank Bldg. Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of August, 19. 50

My commission expires 3-15-51 *J. E. Sigfried* Notary Public.

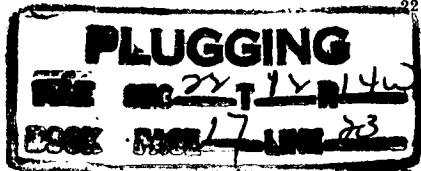

COMPANY: FRANCO CENTRAL OIL COMPANY Rotary Drilling Commenced: 11-19-49
 Wichita, Kansas Rotary Drilling Completed: 11-30-49

LOCATION: WAGNER #1, SW SW SW Sec.22-128-14W
 Russell County, Kansas

CONTRACTOR: PICKRELL DRILLING COMPANY, INC.
 Wichita, Kansas

CASING RECORD: 220.81' (7 jts.) 8 5/8" OD 28# Smls. casing set at 220.81' in a
 12 1/4" hole, cemented with 150 sacks cement. Cement circulated.

3258' (98 jts.) 5 1/2" OD 8 Rd. thd. 14# Smls. casing set at 3258'
 in a 7 7/8" hole, cemented with 150 sacks cement.

LOG

(Figures indicate bottom formation - measurements from top rotary bushing.)

Cellar	5	Circulate for samples at 2767'.
Sand	32	" " " " 2860'.
Rock & Shale	70	" " " " 2967'.
Shale & Shells	400	" " " " 3003'.
Sand & Lime	540	" " " " 3143'.
Sand & Shale	590	" " " " 3172'.
Red Bed, Shale & Shells	850	" " " " 3257'.
Anhydrite	860	" " " " 3260'.
Base Anhydrite	885	
Shale & Shells	1070	
Shale & Lime	1665	
Lime	1815	
Lime & Shale	1880	
Lime	1985	
Shale	2050	
Lime	2495	Lost circulation at 2465'.
Lime Broken	2565	
Lime	2900	Slope test at 500' - 0° off.
Shale	2906	" " " 1000' - 0° off.
Lime & Shale	2967	" " " 1500' - 0° off.
Lime	3254	" " " 2000' - 0° off.
Lime & Shale	3256	S.L.M. at 2119' O.K.
Arbuckle Lime	3260	Rotary T.D. Slope test at 2500' - 0° off.
		" " " 3095' - 0° off.
		S.L.M. at 3095' O.K.
		Slope test at 3260' - 0° off.
		S.L.M. at 3260' O.K.

The undersigned, C. W. Sebitts, Secretary of PICKRELL DRILLING COMPANY, INC., hereby certifies in behalf of said corporation, that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY, INC.
 By C. W. Sebitts
 Secretary

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS

BE IT REMEMBERED that on this 9th day of December, 1949, before me, the undersigned, a Notary Public, duly commissioned, in and for the county and state aforesaid, came C. W. Sebitts, Secretary of Pickrell Drilling Company, Inc., a corporation of the State of Kansas, personally known to me to be such officer, and to be the same person who executed as such officer the foregoing instrument of writing in behalf of said corporation, and he duly acknowledged the execution of the same for himself and for said corporation.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

Edith Zimmerman
 Notary Public
 PLUGGING
 My commission expires January 28, 1952
 BOOK PAGE 17 LINE 23