

15-163-03484-0000

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Rocks..... County. Sec. 9 Twp. 10 Rge. 19 (W)
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE. s. s. SE. s. s. NE.
 Lease Owner. Harbar Drilling Co. Etal.
 Lease Name. Henderson Well No. I
 Office Address. 1019 Central Bldg. Wichita Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed. 12/8/1947 19.
 Application for plugging filed. 3/30/48 19.
 Application for plugging approved. 3/30/48 19.
 Plugging commenced. 3/31/48 19.
 Plugging completed. 4/17/48 19.
 Reason for abandonment of well or producing formation. Dry Hole

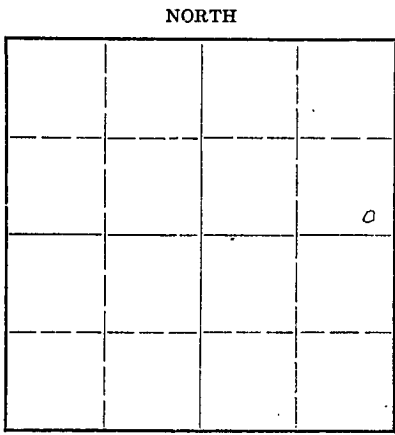

Locate well correctly on above Section Plat

If a producing well is abandoned; date of last production X 19.
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Merle Rives
 Producing formation No production obtained Depth to top..... Bottom..... Total Depth of Well 3782' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|----------------------|----------------------|------|-----|---------------------------|--------|------------|
| Surface sand & soils | Little surface water | 0 | 35' | 10 3/4" | 160' | None |
| | | | | Cemented w/ 100 sx cement | | Circulate |
| | | | | 5 1/2" | 3645' | 2567' |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Bottom 5 1/2" casing was filled with cement to 3478' during/ during time well was being tested this cement was left in pipe and pipe filled with chat to to 3475. Then 5 sax cement was dumped on top chat filling hole back to 3435. Hole was then filled with heavy mud to within 160' of the top, or to the bottom of the surface pipe where a wooden plug was set and 20 sacks cement was dumped on top plug filling hole to 125 feet of the top. Heavy mud was then dumped in hole to with in 6' of the top of surface casing. 10 sacks cement was then dumped in top of surface casing and the bottom of the cellar.

Wichita 5-5-48

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to Harbar Drilling Co.
 Address. 1019 Central Bldg. Wichita Kansas

STATE OF Kansas COUNTY OF Barton, SS.
 I Paul Pfeifer (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul Pfeifer
 (Address)

SUBSCRIBED AND SWORN to before me this 3rd day of May, 1948
 Roy Gillig Notary Public.

My commission expires 9-4-50

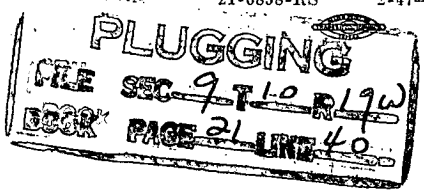

HENDERSON #1.

Center SE $\frac{1}{4}$ SE $\frac{1}{4}$ NE $\frac{1}{4}$ Sec. 9-10-19W, Rooks County, Kansas.

Rigging up Rotary Tools 9-27-47
 Tearing down Rotary Tools 10-14-47
 Rigging up Cable Tools 10-15-47
 Tearing down Cable Tools 12-9-47

Run 6 Jts. 10 3/4", 169' Surface pipe
 Set @ 160'. Cemented with 100 sx cement

Run 118 Jts. 118 Jts. 3645' casing.
 Set @ 3645'. Cemented with 100 sx cement

| FORMATION | FROM | TO |
|------------------|------|------------------|
| Surface dirt | 0 | 65 |
| Sand | 65 | 90 |
| Shale and shells | 90 | 160 |
| Sand and shale | 160 | 495 |
| Shells and shale | 495 | 600 |
| Sand | 600 | 875 |
| Shale | 875 | 900 |
| Sand and shale | 900 | 1510 |
| Shale | 1510 | 1575 |
| Anhydrite | 1575 | 1615 |
| Shale and shells | 1615 | 2105 |
| Lime and shale | 2105 | 2620 |
| Lime | 2620 | 2675 |
| Redbed and shale | 2675 | 2705 |
| Lime | 2705 | 2730 |
| Lime and shale | 2730 | 2915 |
| Shale | 2915 | 2939 |
| Shale and lime | 2939 | 3290 |
| Lime | 3290 | 3340 |
| Lime and shale | 3340 | 3429 |
| Lime | 3429 | 3450 |
| Lime and shale | 3450 | 3470 |
| Shale | 3470 | 3472 |
| Lime | 3472 | 3675 |
| Red Shale | 3675 | 3695 |
| Conglomerate | 3695 | 3782 Total Depth |

I, Don S. Packer, hereby certify that the above log is true and correct to the best of my knowledge and belief.

Don S. Packer

Subscribed and sworn to before me this 9th day of January, 1948.

Mary B. Brunson
 Notary Public

My commission expires: *Dec 23, 1950*

