


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 Give All Information Completely  
 Make Required Affidavit  
 Mail or Deliver Report to:  
 Conservation Division  
 State Corporation Commission  
 800 Bittling Building  
 Wichita, Kansas

OR  
**FORMATION PLUGGING RECORD** Strike out upper line when reporting plugging of formations.

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines **NE NE NE**  
 Lease Owner **Herndon Drilling Company**  
 Lease Name **Bemis** Well No. **"A"91**  
 Office Address **524 Mayo Building, Tulsa, Oklahoma**  
 Character of Well (completed as Oil, Gas or Dry Hole) **Dry hole**  
 Date well completed **November 30** 19**48**  
 Application for plugging filed " " 19 " "  
 Application for plugging approved " " 19 " "  
 Plugging commenced " " 19 " "  
 Plugging completed " " 19 " "  
 Reason for abandonment of well or producing formation **Dry hole**

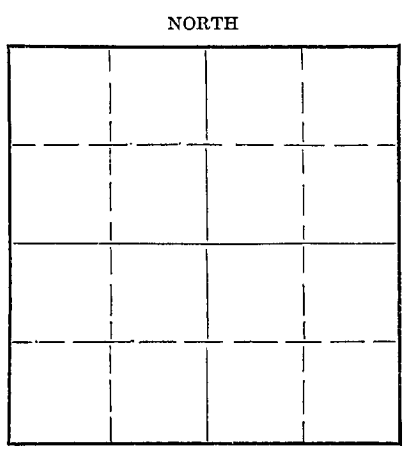

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production..... 19.....  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? **Yes**

Name of Conservation Agent who supervised plugging of this well **Mr. Rives, Hays, Kansas**  
 Producing formation..... Depth to top..... Bottom..... Total Depth of Well **4015** Feet  
 Show depth and thickness of all water, oil and gas formations.

**OIL, GAS OR WATER RECORDS**

**CASING RECORD**

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8	208	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

**Hole filled with heavy mud to 200 ft. Plug set at 200 ft. with 15 sacks of cement on plug. Hole filled with heavy mud to 30 ft. and plug set at 30 ft. filled with cement to bottom of cellar**

12-30-1948

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to.....  
 Address.....

STATE OF **Oklahoma**, COUNTY OF **Tulsa**, ss.

**W. G. Prather** (employee of owner) ~~NOTARY PUBLIC~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *W. G. Prather*

(Address)

SUBSCRIBED AND SWORN TO before me this **29th.** day of **December**, 19**48**

*Walter M. Jones*  
 Notary Public.

My commission expires **Sept. 19, 1952**

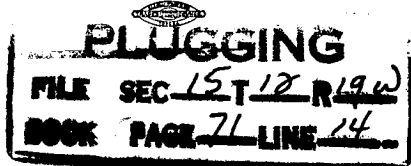

"A"

WELL LOG ON BEMIS #1

Spudding date: 11-15-48  
Date casing set: 11-30-48 - Plugged  
Date rotary completed: 11-30-48  
Date cable completed:


Location:  
C. of NE NE NE, Section 15-12S-19W,  
Ellis County, Kansas

FROM	TO	FORMATION	REMARKS
0	205	Surface hole	Ran 10 Jts. (208') used 8 5/8" O.D. Cag.,
205	510	Shale and shells	Cemented w/ 100 Sks bulk cement,
510	1400	Shale, shells and sand	100# C. C.
1400	1585	Shale and shells	
1585	1635	Anhydrite	
1635	1970	Shale and red bed	
1970	2160	Shale and salt	
2160	2260	Shale and lime	
2260	2340	Lime	
2340	2410	Shale and lime	
2410	2550	Lime and shale	
2550	2800	Lime	
2800	3175	Lime and shale	
3175	3355	Shale and lime	
3355	3440	Lime	
3440	3485	Lime and chert	
3485	3790	Lime	
3790	3840	Lime and shale	
3840	3858	Lime and chert	
3858	3871	Conglomerate	
3871	3955	Conglomerate	
3955	4005	Conglomerate	
4005	4015	Lime	Plugged. Bottom plug set @ 200' w/ 15 Sks cement. Top plug set @ 30' Cemented w/ 10 Sks bulk cement

12-30-1948

Subscribed and sworn to before me this 9th  
day of December, 1948

I certify the above and foregoing to be a true and exact  
copy of the original driller's log on the Bemis #1

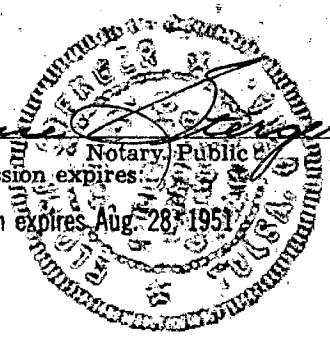  
Notary Public  
My commission expires Aug 28 1951

HERNDON DRILLING COMPANY  
By: [Signature]  
Title:

PLUGGING  
NOV 15 12 1948  
NOV 21 14