

To: STATE CORPORATION COMMISSION  
 Wichita State Office Bldg. - PLUGGING SECTION  
 130 S. Market, Room 2078  
 Wichita, Kansas 67202

API NUMBER 15-205-19828-00-00  
 SW NW NE Sec/Twp/Rge Sec 16 T29S R17E  
4505 (GPS) feet from south section line  
2254 (GPS) feet from east section line

TECHNICIAN'S PLUGGING REPORT  
 Lease/Well# Stich North-Wiles gps# MCD 03  
 County Wilson  
 Operator License # 101  
 Well Total Depth 850 (est) feet  
 Operator: State Of Kansas Fee Fund  
 Production Pipe: 2.5 Size Feet NA  
 Name & Stich North Project  
 Surface Casing: NA Size Feet NA  
 Address \_\_\_\_\_  
 SWD Well/ Input Well \_\_\_\_\_ D & A \_\_\_\_\_  
 AB oil well XXXXXX Gas Well \_\_\_\_\_  
 Other well as hereinafter indicated: \_\_\_\_\_  
 Plugging Contractor: K-W Oil Well Service, Inc Lic. # 3097  
 Address: 19450 Ford Road, Chanute, Kansas 66720  
 Company to plug at: \_\_\_\_\_ Hour: \_\_\_\_\_ Day: 15 Month: 6 2009  
 Plugging proposal received from: Sam Kepley  
 Company Name: K-W Oil Well Service, Inc Phone: 620-433-7730  
 Were: Wash well to TD and fill from btm to top with portland cement.

RECEIVED  
 SEP 08 2009

KCC WICHITA

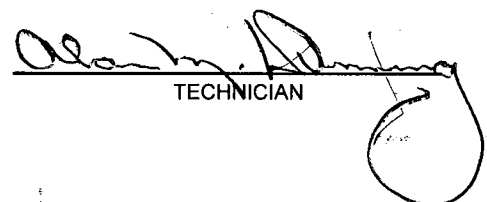
Plugging Proposal Received by: Alan M. Dunning  
 Plugging attended by Agent: All \_\_\_\_\_ Part \_\_\_\_\_ None XXXXXX  
 Operations Completed: Hour: \_\_\_\_\_ Day: 15 Month: 6 2009  
 Actual Plugging Report: A 1" pipe was lowered inside the 2.5" production pipe to 400' to check for obstruction and for open hole. The 1" pipe was removed and the well perforated at 600', 450', and 300'. A 1" cement string was then lowered to 850' inside the 2.5" production pipe and the well pumped full of cement from btm to top thru this cement string. A total of 29 sacks of portland cement were used to plug well. The well was cut off below plow depth and the location restored.

Remarks: Control # 20090028-018

(If additional description is necessary, use BACK of this form.)

I did not observe this plugging.

Signed:

  
 TECHNICIAN