

WELL PLUGGING RECORD

OR FORMATION PLUGGING RECORD


Strike out upper line when reporting plugging off formations.

STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bittling Building Wichita, Kansas

Russell County. Sec. 18 Twp. 13 Rge. 14 (E) X (W) Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NW 1/4 NE 1/4 NW 1/4 Lease Owner Stearns Drilling Company Lease Name New Well No. 1 Office Address Bldg. & Loan Bldg., Russell, Kansas Character of Well (completed as Oil, Gas or Dry Hole) Oil - Producing well Date well completed 19. Application for plugging filed May 27 19.50 Application for plugging approved May 27 19.50 Plugging commenced May 27 19.50 Plugging completed May 31 19.50 Reason for abandonment of well or producing formation Oil not sufficient for prod. This well has not produced since purchased by Stearns Drlg. Co. If a producing well is abandoned, date of last production 19. Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH

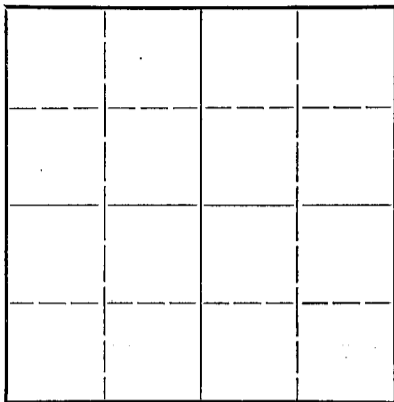

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty, Hays, Kansas Producing formation Arbuckle Depth to top 3194 Bottom 5 Total Depth of Well 3202 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Contains data for 8-5/8" and 5-1/2" casing.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with chat to 3190' Plug and bridge set at 3190' 4 sacks cement set on plug and bridge. Hole filled mud, to 250' 15 sacks cement set on plug and bridge. Hole filled with mud to 35' Plug and bridge set at 35' 10 sacks cement on plug and bridge to top of hole.

RECEIVED JUN 2 1950 STATE CORPORATION COMMISSION KANSAS 06-02-1950

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Stearns Drilling Company Address Box 313, Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss. O. G. Stearns (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) O. G. Stearns

(Address)

SUBSCRIBED AND SWORN to before me this 31st day of May, 1950

Gaul Dalton Notary Public

My commission expires June 20, 1953

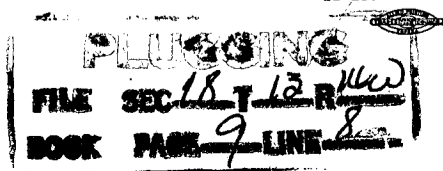

15-167-06350-00-00


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - BAY PETROLEUM CO.
Farm - New No. 1

SEC. 18 T. 13 R. 14 W
NW NE NW

Total Depth. 3202'
Comm. 6-8-45 Comp. 9-12-45
Shot or Treated. Acidized
Contractor.
Issued. 12-8-45

County. Russell
KANSAS



CASING:
8 5/8" 857' Cem.
5 1/2" 3198' Cem.

Elevation. _____

Production. Pot. 224 BPD

Figures Indicate Bottom of Formations.

surface & shale	0-40
shale & lime	275
lime brkn	325
shale & shells	670
shale & red rock	836
anhydrite	850
shale & shells	1815
shale & lime	1905
lime	2095
shale & lime	2385
shale	2495
shale & lime	2570
shale	2657
shale & lime	2830
lime	2848
lime brkn	2893
shale & lime	2988
lime	3029
lime brkn	3043
lime	3196
Arbuckle	3202
Total Depth.	

Tops:
Lansing 2933
Arbuckle 3197

Rotary T. D. 3200
DP 1600' OIH/14 hrs.
Deepened 1'
500 acid
Deepened 1' to 3202
500 Acid.
Est. 5 to 6 BOFH

G. S. O. 2968-75'
S. S. O. 3014-18'
S. O. 3194-97'

06-02-1950

18-12-142
9-11-8