


Initial Closed In Time	-	Minutes		Date	7-12-58	
Tool Open Flow Period	61	Minutes		Ticket No.	131559	
Final Closed In Time	22	Minutes		HOWCO DISTRICT	El Dorado	
Depth Top Gauge	2764'	Ft.	Blanked Off	No	Kind of Job	Open Hole Test
BT. P.R.D. No	396		12	Hr. Clock	CONTRACTOR	Serobee Drilling Co.
Pressure Readings	Field		Office Corrected		HOLE & TOOL DATA	
Initial Hydro Mud Pressure			1458		Elevation	? Top Packer Depth 2773'
Initial Closed in Pres.					Total Depth	2797' Bottom Packer Depth 2787'
Initial Flow Pres.			83		Casing or Hole Size	7 7/8" Size & Type 6 3/4" ESA Wall Packer
Final Flow Pres.			610		Liner or Rathole Size	7 7/8" Size Bottom Choke 5/8"
Final Closed in Pres.			813		Casing Perforations	Top Bottom Size Surface Choke 1"
Final Hydro Mud Pressure			1415		Interval Tested	2773' to 2787' ID & Length Air Chamber -
Depth Center Gauge	2793'	Ft.	Blanked Off	Yes	Formation Tested	? ID & Length Drill Collars -
BT. P.R.D. No	?		12	Hr. Clock	Est. Gauge Depth Temp.	100 F° Size Drill Pipe 4 1/2" API FH
Pressure Readings	Field		Office Corrected		MUD DATA Weight	9.9 Viscosity 34
Initial Hydro Mud Pressure					All depths measured from	Derrick Floor No...Folders Reproduced 5
Initial Closed in Pres.					REMARKS: Interval tested from 2787' to 2797'	
Initial Flow Pres.					in the ? Tool opened @ 9:40 P. M. with a good	
Final Flow Pres.					blow, gas to surface ub 57 minutes, closed in	
Final Closed in Pres.					pressure taken 10:41 P.M., and started off	
Final Hydro Mud Pressure					bottom @ 11:03 P. M.	
Depth Bottom Gauge		Ft.	Blanked Off			
BT. P.R.D. No				Hr. Clock		
Pressure Readings	Field		Office Corrected			
Initial Hydro Mud Pressure						
Initial Closed in Pres.					Recovered	400' Feet of Free oil
Initial Flow Pres.					Recovered	1100' Feet of Salt water
Final Flow Pres.					Recovered	Feet of
Final Closed in Pres.					Recovered	Feet of
Final Hydro Mud Pressure					Witnessed By Mr. L. D. Mc Jilton	
Amount-Type of Cushion	none				Tester	W. L. Gasperson

LOCATION SEC: 23-23-2

FIELD

Wildcat

COUNTY

Harvey

STATE Kansas

LEASE NAME

WELL NO.

TEST NO.

LEASE OWNER

OWNERS DISTRICT


L. D. JILTON

KANSAS



↑
PRESSURE
↓

← TIME →

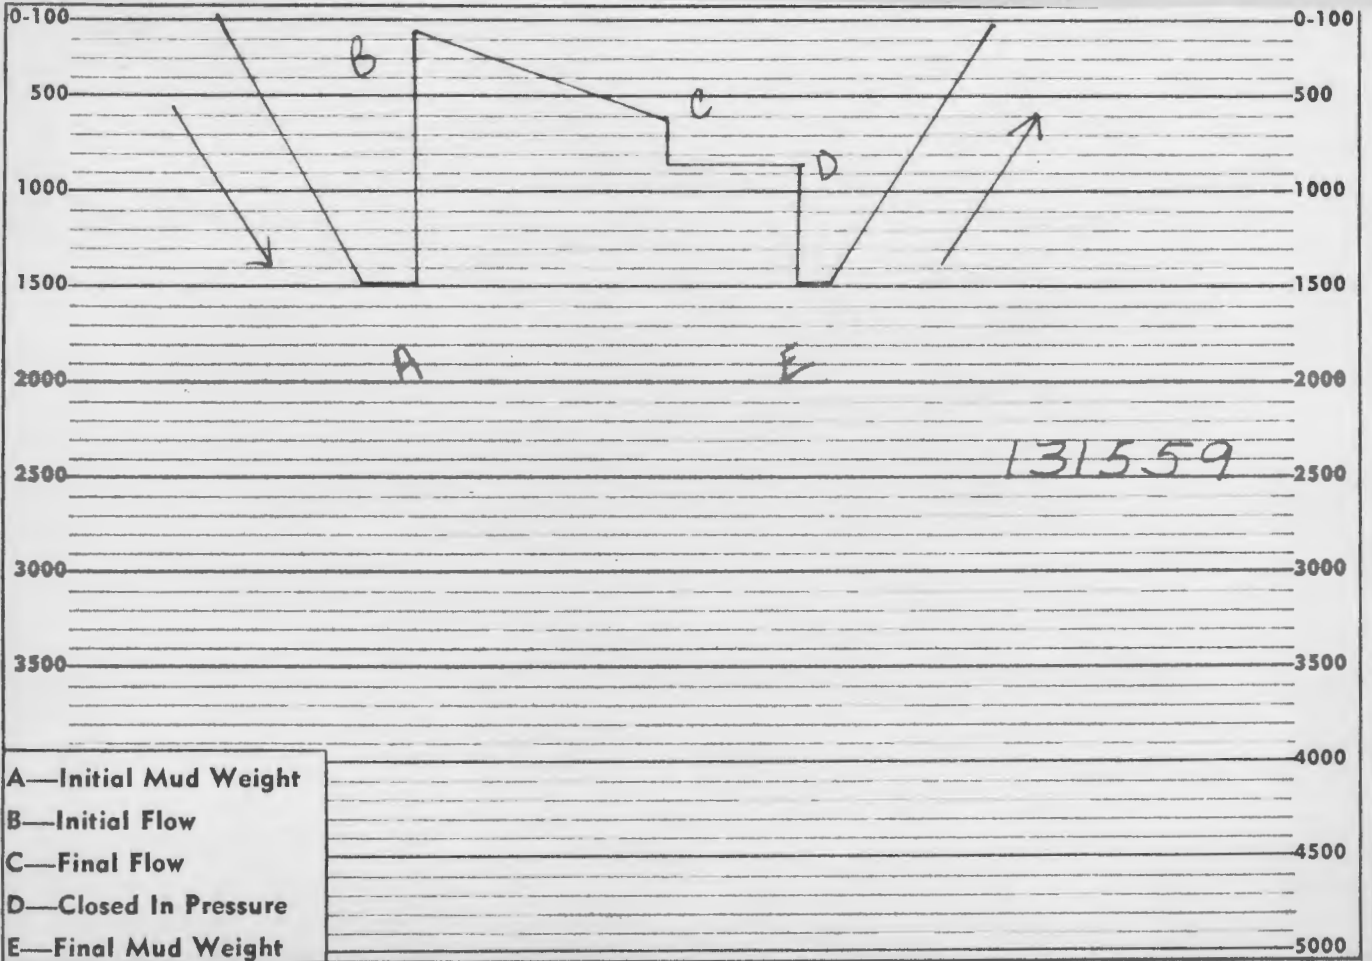

- A—Initial Mud Weight
- B—Initial Flow
- C—Final Flow
- D—Closed In Pressure
- E—Final Mud Weight