


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Ellis County, Sec. 26 Twp. 11 Rge. 27 (W) (W)  
Location as "NE/CNW/SW" or footage from lines Center of NW NE NW  
Lease Owner Cities Service Oil Co  
Lease Name Hall "B" Well No. 7  
Office Address Bartlesville, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) oilwell  
Date well completed 7/22/38 19  
Application for plugging filed 6/7/54 19  
Application for plugging approved 6/8/54 19  
Plugging commenced 6/28/54 19  
Plugging completed 6/29/54 19  
Reason for abandonment of well or producing formation non-commercial

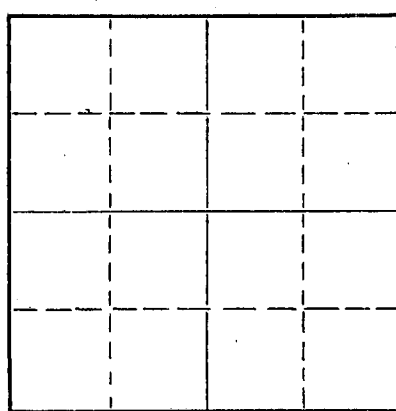

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production August 18, 1953 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation Arbuckle Depth to top 3484' Bottom Total Depth of Well 3514 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				15 1/2"	134'	0
				10-3/4"	1227'	0
				7"	3485'	2513'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sand to 3475', 5 sx. cement to 3450', mud to 315', rock bridge from 315 to 300'  
25 sx. cement to 250', mud to 35', 10 sx. cement to surface.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 7 - 1954

07-07-54

CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Schull Casing Pulling Co.  
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
James Porter (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Porter  
Box 553, Russell, Kansas (Address)



SUBSCRIBED AND SWORN to before me this 6th day of July, 1954  
My commission expires 3-17-1955  
Notary Public.

PLUGGING  
FILE SEC 26 T 11 R 176  
BOOK PAGE 39 LINE 37

WELL RECORD

Company Cities Service Oil Co. Well No. 7 Farm Hall "B"  
 Location 1646.2' E. & 330' S. of NW Cor. Sec. 26 T. 11 R. 17W  
 Elevation - County Ellis State Kansas  
 Initial Prod. 2285 oil, 0 water, 24 hrs. natural Contractor J. E. Mabee  
 Acid None Orig. Comm. Jan. 18, 1938  
 T. D. 3514' Orig. Comp. Feb. 17, 1938

CASING RECORD:

15-1/2" @ 134' cem. 125 sx  
 10-3/4" @ 1227' cem. 435 sx  
 7" @ 3485' cem. 154 sx

FORMATION RECORD:

shale 25  
 shale & shells 146  
 shale 305  
 shale & shells 475  
 shale, shells & red beds 620  
 sand 680  
 shale & shells 712  
 shale, lime & sand 940  
 shale & shells 1095  
 red beds & shale 1222  
 anhydrite 1260  
 red beds, shale & shells 1441  
 shale & shells 1650  
 salt 1770  
 shale & lime 2144  
 lime 2192  
 lime broken 2256  
 lime 2307  
 lime & shale 2615  
 shale & shells 2657  
 shale 2802  
 shale & lime 2865  
 broken lime 2897  
 lime 2932  
 lime & shale 2969  
 lime 3124  
 lime & shale 3193  
 shale 3220  
 lime 3303  
 lime & shale 3318  
 lime soft (odor oil) 3321  
 lime & shale 3348  
 lime 3485  
 sandy shale & shale 3488  
 shale & sand (cored) 3490  
 lime (cored) 3491  
 SLM Corr. 3491 = 3485'  
 lime 3487  
 lime (cored w/ cable tools) 3514 T. D.

Top Simpson 3479' SLM  
 Top Arbuckle 3484' SLM  
 Penetration 30'  
 Total Depth 3514'

Fillup: 1300' oil in 2 hrs.  
 2400' oil in 4 hrs.  
 2850' oil in 6 hrs.  
 2850' fluid level.

Best pays: 3485-3489  
 3493-3496  
 3501-3511

Cored 3487-3514 with cable tool core barrel.

SYFO: 1000' 0°  
 1500' 1°  
 2000' 0°  
 3000' 0°

RECEIVED  
 STATE CORPORATION COMMISSION  
 JUN 13 - 1954  
 06-08-54  
 CONSERVATION DIVISION  
 Wichita, Kansas

PLUGGING  
 FMX SEC 26 T 11 R 17W  
 BOOK PAGE 39 LINE 37