

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

ORIGINAL

Form ACO-1
June 2009

Form Must Be Typed
Form must be Signed
All blanks must be Filled

WELL COMPLETION FORM
WELL HISTORY - DESCRIPTION OF WELL & LEASE

OPERATOR: License # 32461
Name: Tailwater, Inc.
Address 1: 6421 Avondale Dr., Ste. 212
Address 2: _____
City: OKC State: OK Zip: 73116 + _____
Contact Person: Christian L. Martin
Phone: (405) 810-0900
CONTRACTOR: License # 8509
Name: Evans Energy Development Inc.
Wellsite Geologist: n/a
Purchaser: Pacer Energy

Designate Type of Completion:
 New Well Re-Entry Workover
 Oil WSW SWD SLOW
 Gas D&A ENHR SIGW
 OG GSW Temp. Abd.
 CM (Coal Bed Methane)
 Cathodic Other (Core, Expl., etc.): _____

If Workover/Re-entry: Old Well Info as follows:
Operator: _____
Well Name: _____
Original Comp. Date: _____ Original Total Depth: _____
 Deepening Re-perf. Conv. to ENHR Conv. to SWD
 Conv. to GSW
 Plug Back: _____ Plug Back Total Depth _____
 Commingled Permit #: _____
 Dual Completion Permit #: _____
 SWD Permit #: _____
 ENHR Permit #: _____
 GSW Permit #: _____
8/13/10 8/16/10 9/27/10
Spud Date or Date Reached TD Completion Date or
Recompletion Date Recompletion Date

API No. 15 - 003-24861-00-00
Section Description: _____
SE NW SW SW Sec. 15 Twp. 20 S. R. 20 East West
825 411 Feet from North / South Line of Section
495 5159 Feet from East / West Line of Section
Footages Calculated from Nearest Outside Section Corner:
 NE NW SE SW
County: Anderson
Lease Name: West Wittman Well #: 9-T
Field Name: Garnett Shoestring
Producing Formation: Squirrel
Elevation: Ground: 955 est Kelly Bushing: n/a
Total Depth: 734' Plug Back Total Depth: n/a
Amount of Surface Pipe Set and Cemented at: 20.6 Feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set: _____ Feet
If Alternate II completion, cement circulated from: 0
feet depth to: 20.6' w/ 6 sx cmt.

Drilling Fluid Management Plan
(Data must be collected from the Reserve Pit)
Chloride content: _____ ppm Fluid volume: _____ bbls
Dewatering method used: _____
Location of fluid disposal if hauled offsite: _____
Operator Name: _____
Lease Name: _____ License #: _____
Quarter _____ Sec. _____ Twp. _____ S. R. _____ East West
County: _____ Permit #: _____

INSTRUCTIONS: An original and two copies of this form shall be filed with the Kansas Corporation Commission, 130 S. Market - Room 2078, Wichita, Kansas 67202, within 120 days of the spud date, recompletion, workover or conversion of a well. Rule 82-3-130, 82-3-106 and 82-3-107 apply. Information of side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form (see rule 82-3-107 for confidentiality in excess of 12 months). One copy of all wireline logs and geologist well report shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

AFFIDAVIT
I am the affiant and I hereby certify that all requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.
Signature: Steve B. Martin
Title: Office Mgr Date: 3-2-11

KCC Office Use ONLY
 Letter of Confidentiality Received
Date: _____
 Confidential Release Date: MAR 07 2011
 Wireline Log Received
 Geologist Report Received
 UIC Distribution
ALT I II III Approved by: Dg Date: 3/11/11
RECEIVED
KCC WICHITA

Operator Name: Tailwater, Inc. Lease Name: West Wittman Well #: 9-T
 Sec. 15 Twp 20 S. R. 20 East West County: Anderson

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all final copies of drill stems tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface test, along with final chart(s). Attach extra sheet if more space is needed. Attach complete copy of all Electric Wire-line Logs surveyed. Attach final geological well site report.

Drill Stem Tests Taken <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>(Attach Additional Sheets)</i> Samples Sent to Geological Survey <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Cores Taken <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Electric Log Run <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Electric Log Submitted Electronically <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>(If no, Submit Copy)</i> List All E. Logs Run: Gamma Ray/Neutron	<input checked="" type="checkbox"/> Log Formation (Top), Depth and Datum <input type="checkbox"/> Sample Name Top Datum Squirrel Driller's Log attached
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


CASING RECORD <input type="checkbox"/> New <input type="checkbox"/> Used							
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (In O.D.)	Weight Lbs. / Ft.	Setting Depth	Type of Cement	# Sacks Used	Type and Percent Additives
surface	9 7/8"	7"		20.6'	Portland	6	
completion	5 5/8"	2 7/8"		724'	Portland	106	50/50 POZ

ADDITIONAL CEMENTING / SQUEEZE RECORD				
Purpose:	Depth Top Bottom	Type of Cement	# Sacks Used	Type and Percent Additives
<input type="checkbox"/> Perforate <input type="checkbox"/> Protect Casing <input type="checkbox"/> Plug Back TD <input type="checkbox"/> Plug Off Zone				

Shots Per Foot	PERFORATION RECORD - Bridge Plugs Set/Type Specify Footage of Each Interval Perforated	Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used)	Depth
2	663' - 673' (21 perfs)	75 gal. 15% HCL	
		30 sx sand - 135 bbl H2O	

TUBING RECORD: Size: <u>2 7/8"</u> Set At: <u>20.6'</u> Packer At: <u>n/a</u> Liner Run: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
Date of First, Resumed Production, SWD or ENHR: 9/27/10	Producing Method: <input type="checkbox"/> Flowing <input checked="" type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (Explain) _____
Estimated Production Per 24 Hours	Oil Bbbs. <u>10</u> Gas Mcf <u>0</u> Water Bbbs. <u>n/a</u> Gas-Oil Ratio _____ Gravity _____

DISPOSITION OF GAS: <input type="checkbox"/> Vented <input type="checkbox"/> Sold <input type="checkbox"/> Used on Lease <i>(If vented, Submit ACO-18.)</i>	METHOD OF COMPLETION: <input type="checkbox"/> Open Hole <input type="checkbox"/> Perf. <input type="checkbox"/> Dually Comp. <input type="checkbox"/> Commingled <i>(Submit ACO-5)</i> <i>(Submit ACO-4)</i> <input type="checkbox"/> Other (Specify) _____	PRODUCTION INTERVAL: <div style="text-align: center; border: 1px solid black; padding: 5px;"> RECEIVED MAR 07 2011 </div>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

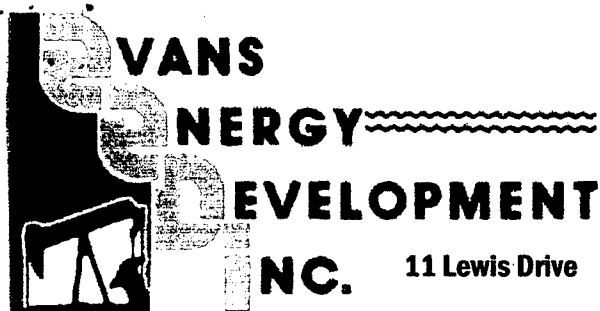

**VANS
ENERGY
DEVELOPMENT
INC.**

11 Lewis Drive

Paola, KS 66071

**Oil & Gas Well Drilling
Water Wells
Geo-Loop Installation**

Phone: 913-557-9083

Fax: 913-557-9084

WELL LOG

Tailwater, Inc.

West Wittman #9-T

API# 15-003-24,861

August 13 - August 16, 2010

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
14	soil & clay	14
73	shale	87
27	lime	114
65	shale	179
17	lime	196
1	shale	197
32	lime	229
6	shale	235 making water
21	lime	256
2	shale	258
22	lime	280 base of the Kansas City
164	shale	444
21	lime	465 good oil show
7	shale	472
15	sand	487 white sand, no oil
17	shale	504
8	oil sand	512 light green, good bleeding
15	shale	527
2	lime	529
15	shale	544 lite oil show
2	lime	546
20	shale	566
4	lime	570
4	shale	574
5	lime	579
18	shale	597
4	lime	601
19	shale	620
1	lime	621
42	shale	663
11	oil sand	674 brown, good bleeding
3	black sand	677 no bleeding
57	shale	734 TD

Drilled a 9 7/8" hole to 20.6'

Drilled a 5 5/8" hole to 734'.

Set 20.6" of 7" surface casing with 6 sacks of cement.

Set 724' of 2 7/8" 8 round upset tubing including 3 centralizers, 1 float shoe and 1 clamp.

RECEIVED
MAR 07 2011
KCC WICHITA



CONSOLIDATED
Oil Well Services, LLC

TICKET NUMBER 27104
LOCATION Ottawa KS
FOREMAN Fred Mader

PO Box 884, Chanute, KS 66720
620-431-9210 or 800-467-8676

FIELD TICKET & TREATMENT REPORT
CEMENT

DATE	CUSTOMER #	WELL NAME & NUMBER	SECTION	TOWNSHIP	RANGE	COUNTY
8/17/0	7806	Wittman #9-T	SW 15	20	20	AW
CUSTOMER			TRUCK #	DRIVER	TRUCK #	DRIVER
Tailwater Inc.			506	Fred	Safety Mtg	
MAILING ADDRESS			495	Casey	CK	
6421 Avondale Dr. Ste 212			370	Derek	JM	
CITY	STATE	ZIP CODE	510	Arlan	Am	
Oklaoma City	OK	73116				

JOB TYPE long string HOLE SIZE 5 7/8 HOLE DEPTH 733' CASING SIZE & WEIGHT 2 7/8 E 65
 CASING DEPTH 722' DRILL PIPE _____ TUBING _____ OTHER _____
 SLURRY WEIGHT _____ SLURRY VOL _____ WATER gal/sk _____ CEMENT LEFT in CASING 2 1/2 Plug
 DISPLACEMENT 4.2 BBL DISPLACEMENT PSI _____ MIX PSI _____ RATE 5 BPM

REMARKS: Establish circulation. Mix a Pump 100# Premium Gel
Flush. Mix Pump 108 SKs 50/50 Por Mix Cement. 2 7/8 Cpl.
Cement to Surface. Flush pump + lines clean. Displace
2 1/2" rubber plug to casing ID w/ 4.2 BBLs Fresh water
Pressure to 500^{psi}. Release pressure to set float valve.
Shut in casing

Fred Mader

Evans Energy Dev. Inc.

ACCOUNT CODE	QUANTITY or UNITS	DESCRIPTION of SERVICES or PRODUCT	UNIT PRICE	TOTAL
5401	1	PUMP CHARGE Cement Pump		925 ⁰⁰
5406	25 mi	MILEAGE Pump Truck		91 ²⁵
5402	722'	casing footage		N/C
5407A	1/2 minimum	Ton Miles		157 ⁵⁰
5502C	1 1/2 hrs	80 BBL Vac Truck		150 ⁰⁰
1124	106 SKS	50/50 Por Mix Cement		1043 ⁰⁴
1118B	282 [#]	Premium Gel		56 ⁴⁰
4402	1	2 1/2" Rubber Plug		23 ⁰⁰
			7.8%	SALES TAX
				ESTIMATED
				TOTAL
				87 ⁵⁰
				2533 ⁷⁴

RECEIVED

MAR 07 2011

KCC WICHITA

WO# 236027

Ravin 3737

AUTHORIZATION TITLE _____ DATE _____

I acknowledge that the payment terms, unless specifically amended in writing on the front of the form or in the customer's account records, at our office, and conditions of service on the back of this form are in effect for services identified on this form.