

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-051-20121-00-00  
Spot: NWSWNE Sec/Twnshp/Rge: 15-13S-19W  
3633 feet from S Section Line, 2395 feet from E Section Line  
Lease Name: DREILING Well #: 3 SWD  
County: ELLIS Total Vertical Depth: 3848 feet

Operator License No.: 5145  
Op Name: DREILING OIL INC  
Address: 1008 CODY AVE PO BOX 550  
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	160	0	100 SX
DVT		1370		400 SX
PROD	4.5	3750	0	175 SX

Well Type: SWD UIC Docket No: D13898.0 Date/Time to Plug: 10/01/2010 12:45 PM  
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC  
Proposal Rcvd. from: TERRY W. PIESKER Company: DREILING OIL INC. Phone: (785) 625-8327

Proposed Plugging Method: Ordered 315 sxs 60/40 pozmix - 4% gel - 600# hulls.  
D.V. Tool at 1370' w/400 sxs.  
Operator elected all cement plug.

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 10/01/2010 5:00 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Express Well Service RIH with tubing to 3495'.  
Quality Cementing rigged to tubing and mixed and pumped 100 sxs cement with 300# hulls.  
Pulled tubing to 2200'. Quality cementing rigged to tubing and mixed and pumped 75 sxs cement with 200# hulls.  
Pulled to 1000'. Quality mixed and pumped 80 sxs cement with 100# hulls to circulate cement to pit area.  
Pulled tubing and rigged to 4 1/2" casing with a swedge - pumped 5 sxs cement.  
Max. P.S.I. 400#. S.I.P. 400#.  
8 5/8" - Backside full of heavy polymer - could not rig on at this time.  
Operator plans to clean out.  
10/08/2010 - 8 5/8" - pumped 5 sxs cement with Max. P.S.I. 200#. S.I.P. 200#.  
Witnessed by Marvin Mills.

Perfs:

Top	Bot	Thru	Comments
3750	3848		ARBUCKLE OPEN

RECEIVED  
OCT 18 2010


Remarks: QUALITY OIL WELL CEMENTING COMPANY-TICKET #4579.

Plugged through: TBG

KCC WICHITA

District: 04

Signed

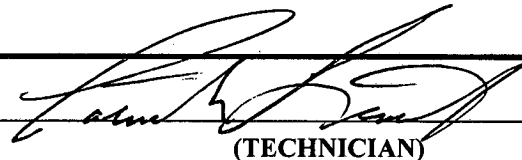

(TECHNICIAN)

CM