


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Greeley County. Sec. 9 Twp. 18 Rge. 40 (E) W. (W)
Location as "NE/CNW%SW%" or footage from lines 330' S. & 330' W. of Center
Lease Owner Cities Service Oil Company
Lease Name Sell Well No. 1
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 14, 19 54
Application for plugging filed March 14, 19 54
Application for plugging approved March 14, 19 54
Plugging commenced March 14, 19 54
Plugging completed March 14, 19 54
Reason for abandonment of well or producing formation Dry Hole

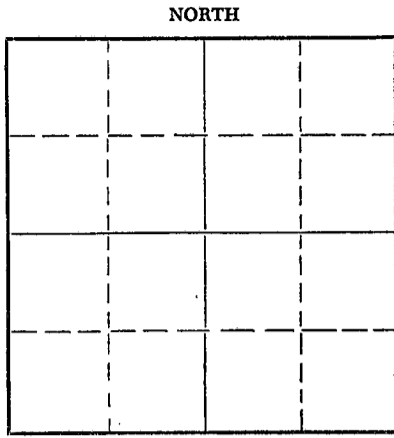

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production ----- 19---
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren H. Horner
Producing formation Mississippi Depth to top 5148 Bottom 5320 Total Depth of Well 5320 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1803'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


5320-300' heavy mud.
300-230' wood plug, hull bridge and 20 sacks cement.
230-35' mud.
35' to base of cellar, wood plug, hulls and 10 sacks cement.

RECEIVED
MAR 23 1954
3-23-54
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor The R. W. Rine Drilling Company
Address 320 Central Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (employee of owner) or (owner/contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 751, Great Bend, Kansas
(Address)



SUBSCRIBED AND SWORN to before me this 17th day of March, 19 54
W. J. Smith
Notary Public.

PLUGGING
FILE SEC 9 T 18 R 40
BOX PAGE 19 LINE 39

WELL RECORD 15.071.00012.0000

Company Cities Service Oil Co. Well No. 1 Farm Sell
 Location 330' South and 330' West of Center Sec. 9 T. 18 R. 40W
3619 D.P.
 Elevation 3622 R.B. County Greeley State Kansas
(3612 Gr.)
 Drlg. Comm. February 18, 1954 Contractor R. W. Rine Drilling Company
 Drlg. Comp. March 13, 1954 Acid None
 T. D. 5320' Initial Prod. Dry Hole - P. & A. 3-14-54

CASING RECORD:

8-5/8" @ 1804' con. 800 sz cement

FORMATION RECORD:

sand & clay	0-380
shale & chalk	1028
sand, shale & gypsum	1470
gypsum, sand & shale	1594
red bed & gypsum	1635
shale	1808
red bed, sand, gypsum & salt	2235
gypsum, sand & shale	2496
red bed	2600
anhydrite	2623
shale	2910
shale & lime	3006
sand, lime & shale	3055
shale & lime	3240
sandy shale & lime	3330
lime & shale	3426
cherty lime & shale	3540
lime & shale	3580
cherty lime & shale	3600
lime & shale	3665
lime	3737
lime & shale	3815
lime	3940
cherty lime & shale	3981
lime	4082
lime, shale & chert	4110
lime & shale	4135
lime	4250
lime & shale	4295
lime	4363
cored lime & shale	4373
lime & shale	4410
lime	4495
lime & shale	4540
lime	4570
cherty lime	4670

line	4705
line & shale	4777
line	4785
line & shale	4855
lime	4900
cherty lime	4930
shale & lime	4996
cherty lime	5005
shale	5105
shale & lime	5130
lime	5160
lime & shale	5320 T. D.

Anhydrite	2598'
Topeka (Elec. Log)	3956'
Heebner (Elec. Log)	4295'
Dodge (Elec. Log)	4304'
Lansing (Elec. Log)	4336'
Mississippi (Elec. Log)	5148'
Penetration	172'
Total Depth	5320'

Drill Stem Test 2986-3006, open 30 mins., recovered 10' mud; B. H. P. 0//30 mins.

Drill Stem Test 5130-60, open 30 mins., recovered 11' mud; B. H. P. 930//15 mins.

SLOPE TESTS (SPERRY-SUN):

300'	1°
700'	1/2°
1150'	1/2°
1550'	3/4°
2000'	1/2°
2450'	1/2°
3390'	1°
3700'	2°
3870'	2°
4880'	1°
5005'	1°
5125'	1°
4263'	1°
4440'	1°

STATE CORPORATION COMMISSION
 MAR 23 1954
 CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING
 FILE SEC 9 T 18 R 40W
 BOOK PAGE 19 LINE 39