

15-169-00204-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
806 Biting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

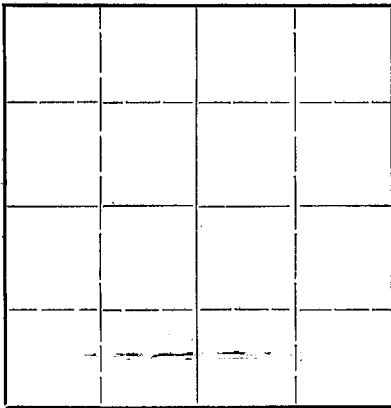

Locate well correctly on above
Section Plat

Saline County. Sec. 34 Twp. 15 Rge. (E) 3 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE Corner
Lease Owner N. Applaman Company, et al
Lease Name Gunnerson Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date, well completed November 18 19 42
Application for plugging filed November 18 19 42
Application for plugging approved November 18 19 42
Plugging Commenced November 19 19 42
Plugging Completed November 19 19 42
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Revl Durkeg, McPherson, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3530 Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

320 feet 8-5/8" surface cemented, bottom of hole 3530 feet. Filled with 10 sacks mud to 190 feet, put in 10 sacks cement, plug filled up to 15 feet of top with mud then put in 5 sacks cement, put plug at base of cellar, cut off surface pipe in cellar and weld cap over it, fill hole up with soil.

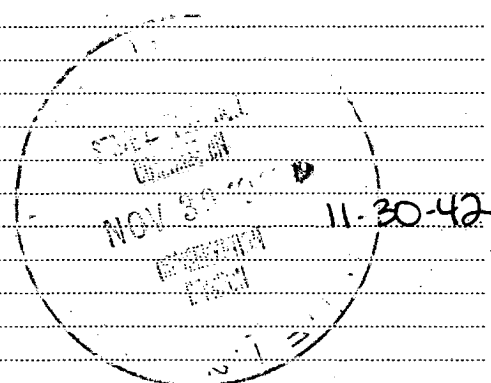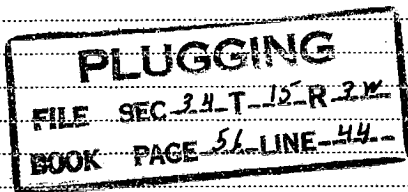

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Veeder Supply & Development Co.
Address P. O. Box 270, Cherryvale, Kansas

STATE OF Kansas, COUNTY OF Montgomery, ss.
Veeder Supply & Development Co. (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. The Veeder Supply & Development Co.


(Signature) By: Samuel C. Veeder President

Cherryvale, Kansas (Address)

November 27th day of November, 19 42.

Leo S. Veeder

Notary Public.



Farm Gummerson

No. 1

SE corner

15-169-00204-00-00

Total Depth 3530'

County Saline County, Kansas


Comm. 11-2-42

Comp. 11-18-42

Shot or treated

Contractor Veeder Supply & Development Company

Issued



Casing

20 in.	10 in.
15 1/2	8 1/4
12 1/2	6 5/8
13 3/8	5 3/16

Elevation

Production - Dry

Figures Indicate Bottom of Formation


Soil & clay	0	15	15	Lime & shale	3210	35	3245
Shale	15	35	50	Shale, shells	3245	43	3288
Shale & shells	50	200	250	Top Viola Lime -	3282 feet.		
Shells, anhydrite	250	65	315	Lime Viola	3288	7	3295
Anhydrite	315	5	320	Lime chirt	3295	25	3320
Run surface pipe				Lime	3320	70	3390
Anhydrite	320	30	350	Lime, chirt	3390	20	3410
Red bed, shells	350	35	385	Lime	3410	80	3490
Sand, shells, shale	385	40	425	Sand, shale, lime	3490	25	3515
Red bed, sand	425	80	505	Chirt lime	3515	15	3530
Sandy lime & shale	505	115	620				
Sand & lime	620	20	640				
Red rock & shale	640	15	655				
Lime & shale	655	25	680				
Sand & lime	680	140	820				
Shale shells	820	105	925				
Sandy lime, shale	925	90	1015				
Shale & shells	1015	635	1650				
Lime & shale	1650	135	1785				
Lime	1785	70	1855				
Shale & lime	1855	240	2095				
Shale	2095	60	2155				
Lime	2155	45	2200				
Shale & lime	2200	30	2230				
Sand	2230	25	2255				
Lime & shale	2255	100	2355				
Shale, shells	2355	85	2440				
Lime & shale	2440	20	2460				
Lime	2460	30	2490				
Shale & shells	2490	95	2585				
Shale	2585	45	2630				
Shale & shells	2630	40	2670				
Shale	2670	133	2803				
Shale & chat	2803	27	2830				
Top chat -	2803 feet.						
Chat, chirt	2830	30	2860				
Hard lime	2860	5	2865				
Chirt	2865	8	2873				
Chat & chirt	2873	5	2878				
Shale, chat, chirt	2878	127	3005				
Lime chirt	3005	7	3012				
Dolemite Lime	3012	28	3040				
Shale	3040	90	3130				
Shale & shells	3130	60	3210				

CASING RECORD

Run 320' of 8-5/8" surface casing and set with 190 sacks cement.

PLUGGING RECORD

Filled hole with mud and 10 sacks cement. Plug at 190 feet. Filled with mud to 15 feet. 5 sacks cement filled up to 3 feet below surface. Cut off pipe & welded cap over top.

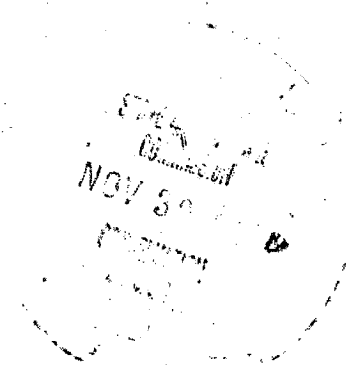

PLUGGING
 FILE SEC-34-T-15-R-3W
 BOOK PAGE-56-LINE-44-