


15-169-00930-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Saline County, Sec. 10 Twp. 16S Rge. 3W (E) (W)

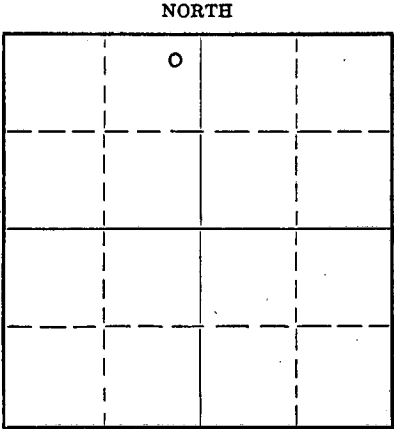

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE NW  
 Lease Owner Carrier & Keys  
 Lease Name Johnson Well No. 1  
 Office Address P. O. Box 164, 155 S. Santa Fe, Salina, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole) Oil  
 Date well completed June 23, 1949 19  
 Application for plugging filed February 16, 1953 19  
 Application for plugging approved March 3, 1953 19  
 Plugging commenced Feb 21 1953  
 Plugging completed Feb 24 1953  
 Reason for abandonment of well or producing formation oil depleted

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3364 $\frac{1}{2}$  Feet  
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size   | Put In | Pulled Out        |
|-----------|---------|------|----|--------|--------|-------------------|
|           |         |      |    | 8-5/8" | 305'   | <u>none</u>       |
|           |         |      |    | 5-1/2" | 3355   | <u>24.33 feet</u> |
|           |         |      |    |        |        |                   |
|           |         |      |    |        |        |                   |
|           |         |      |    |        |        |                   |
|           |         |      |    |        |        |                   |
|           |         |      |    |        |        |                   |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Reported as previously plugged back to  
 3334 feet. Bridged at 2667 feet by mistake with  
 metal. Four sacks of cement dumped at 2667 feet,  
 Mud to 185 feet. Bridge from 185 feet to 175  
 feet. 15 sacks of cement dumped at 175 feet.  
 Filled with mud to 15 feet and cement cap at  
 top.

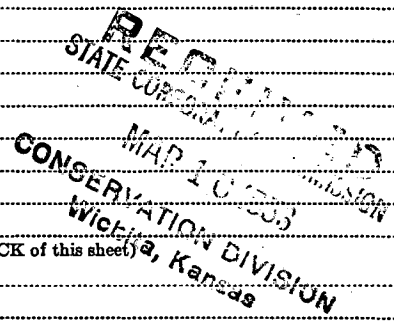

Name of Plugging Contractor Earl Miller,  
 Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SALINE, ss.

H.S. CURRIER (employee of owner) or (owner or operator) of the above-described well,  
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H.S. Currier  
P.O. Box 164 Salina, Kan  
 (Address)

SUBSCRIBED AND SWORN to before me this 7th day of March, 1953  
Clarence H. Howell Notary Public.

My commission expires February 23, 1955

**PLUGGING**  
 FILE SEC 10 T 16 R 3W  
 BOOK PAGE 82 LINE 10

1306 Ek.

15-169-00930-00-0

G. JOHNSON WELL #1 NE NE NW-10-16-34  
Drilling Report June 23-1949 Saline Co. Ks  
E. K. Carey Contractor  
Currier and Keys Operator  
Salina, Kansas

Rotary Log

|      |   |  |
|------|---|--|
| To   |   |  |
| 40   | - | Shale                                  |
| 70   | - | Sand & Shale                           |
| 135  | - | Lime & Shale                           |
| 166  | - | Shale & Shells                         |
| 161  | - | Reamed                                 |
| 270  | - | Shale                                  |
| 300  | - | Shale & Shells                         |
| 305  | - | Lime                                   |
| 305  | - | Cement & Plug                          |
| 330  | - | Anhyrite Lime                          |
| 350  | - | Lime & Breaks                          |
| 855  | - | Lime & Sand                            |
| 900  | - | Shale                                  |
| 1120 | - | Shale & Shells                         |
| 1630 | - | Shale & Lime                           |
| 2010 | - | Lime                                   |
| 2105 | - | Lime & Shale                           |
| 2305 | - | Lime                                   |
| 2634 | - | Lime & Shale                           |
| 2805 | - | Shale                                  |
| 2854 | - | Chat                                   |
| 2888 | - | Mississippian                          |
| 2940 | - | Mississippi Lime                       |
| 2990 | - | Lime                                   |
| 3004 | - | Mississippian                          |
| 2975 | - | Ream                                   |
| 3021 | - | Lime                                   |
| 3164 | - | Shale & Lime                           |
| 3288 | - | Shale                                  |
| 3320 | - | Lime                                   |
| 3360 | - | T. D. D. F.                            |
| 3352 | - | Bottom Shoe D. F.                      |
| 3324 | - | Top of Halliburton Plug on Float D. F. |

Cable Tools Drilling in Report

|      |    |                    |                                   |
|------|----|--------------------|-----------------------------------|
| 3360 | To | 3361               | Cement                            |
| 3361 | To | 3364               | Soft Lime Oil                     |
| 3363 | To | 3664 $\frac{1}{2}$ | Lime Harder (3 BBL Water per day) |

Plugged back to 3363 $\frac{1}{2}$  with lead wool.  
Acidized with 1000 Gal. of Acid.  
Initial Production 42 BBLs per day.

STATE OF KANSAS  
CONSERVATION  
WICK

PLUGGING

FILE SEC 10 T 16 R 3 W  
BOOK PAGE 82 LINE 10