

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

15-169-19154-00-00

Saline County, Sec. 11 Twp. 16S Rge. 3W (E) (W)

NORTH

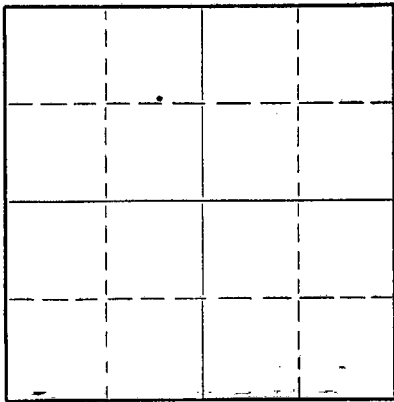

Locate well correctly on above  
Section Plat

Location as "NE/CNW%SW%" or footage from lines \_\_\_\_\_  
Lease Owner Laubengayer Busboom & Rauh  
Lease Name Salina Bldg. Co. Well No. B-1  
Office Address Salina Journal Bldg. Salina, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) S. W. D.  
Date well completed 12-21-50 19\_\_\_\_  
Application for plugging filed 11-30-53 19\_\_\_\_  
Application for plugging approved 12-1-53 19\_\_\_\_  
Plugging commenced 3-4-54 19\_\_\_\_  
Plugging completed 3-4-54 19\_\_\_\_  
Reason for abandonment of well or producing formation No longer needed

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durke  
Producing formation \_\_\_\_\_ " \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 258 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|------|--------|------------|
|           |         |      |    | 5"   | 150'   | None       |
|           |         |      |    | 3"   | 232'   | "          |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Could only get down to approx. 30 ft. due to corrosion and 5" & 3" were cemented so, cut pipe off below plow depth and put cement cap at top.

Plugging done by hand

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Ellis Well Service Co  
Address Assaria Kansas

STATE OF Kansas, COUNTY OF McPherson, ss. De Loss Parr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) De Loss Parr Agent  
615 S Elm McPherson Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13th day of March, 19 54

My commission expires November 13, 1956



RECEIVED Notary Public.  
STATE CORPORATION COMMISSION

**PLUGGING**  
FILE SEC 11 T 16 R 30  
BOOK PAGE 62 LINE 20

MAR 17 1954

MAR 15 1954

CONSERVATION DIVISION  
Wichita, Kansas

CONSERVATION DIVISION  
Wichita, Kansas

15-169-19154-00-00

HYDRAULIC DRILLING COMPANY

102 1/2 N. SANTA FE  
PHONE 7-1532

WATER WELLS  
TEST HOLES

SALINA, KANSAS  
BOX 477

LOG OF WELL

NAME Laubengayer, Busboom and Rauh HOLE NO. D 1 DATE DRILLED 11-28 to 12-4-1950

LOCATION SE, NE, NW, sec. 11 T 16S. R 3W. Saline Co.

90 ft. east of Salina Bldg. Co. No. 2

TYPE OF WELL Disposal TOPOGRAPHY Flood plain terrace

DEPTH 258 FEET. DIAM. OF HOLE 8, 5, 3 INCHES. DEPTH TO WATER 59 FEET below LS

CASINGS: DIAM. 5, 3 INCHES. SET AT 151, 232 FEET. FINISH open hole 232-258

YIELD Took 500 gallons water in 16 min. by gravity

REMARKS Estimated disposal rate, 900 barrels per day

| DESCRIPTION OF MATERIAL  | THICKNESS (FEET) | DEPTH (FEET) | DRILLING CHARACTER & REMARKS                                      |
|--|------------------|--------------|---|
| <b>Alluvium:</b>   |                  |              |   |
| Silt and clay, dark gray grading downward to light greenish gray   | 12               | 12           | Slow, smooth  |
| Silt and clay, buff to tan; contains much gravel, fine to medium and sand, increasing toward base of interval  | 14               | 26           | Fairly slow, slight chatter. Gravel is Kiowa and Permian-derived. |
| <b>Permian - Wellington shale:</b>   |                  |              |   |
| Shale, light-greenish-gray and blue-gray   | 9                | 35           | Slow, slight chatter. Few thin red-brown zones 26 to 30           |
| Shale, dark gray and blue-gray; contains many zones of gypsum interbedded with shale   | 222              | 257          | Very slow, chatter. Set 5" casing at 151' Set 3" casing at 232'   |
| Lost circulation at 233, regained circulation several times to 257. No sample recovered below 233ft. Drilled like porous gypsum and interbedded shale. |                  |              |   |
| Anhydrite(?) hard  | 1                | 258 TD       | Very slow on chuck, smooth  |

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 7 - 1950  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC 11 T 16 R 3W  
BOOK PAGE 62 LINE 20