


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

15-169-00669-00-00

NORTH

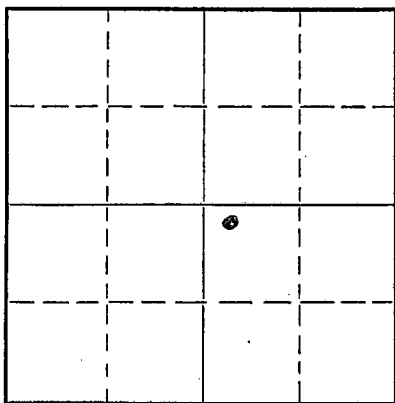

Locate well correctly on above
Section Flat

Saline County. Sec. 11 Twp. 16 Rge. 3 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 60' E of C NW $\frac{1}{4}$ NW $\frac{1}{4}$ SE $\frac{1}{4}$
Lease Owner Thomas H. Parry
Lease Name Runquist Well No. # 1
Office Address 425 West Iron Avenue, Salina, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed October 24, 19 50
Application for plugging filed October 24, 19 50
Application for plugging approved October 24, 19 50
Plugging commenced October 24, 19 50
Plugging completed October 24, 19 50
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production XX 19...
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3416 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	20	35	12 $\frac{1}{2}$ "	148	0
Viola	Water	3409	3416	8 5/8"	280	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Circulated heavy mud 1/2 way out of hole. Filled hole to 160' with heavy mud. Pushed wooden plug to 160' and buildt bridge to hold drill pipe. Mixed 15 sacks cement on this bridge. Filled hole to 35' and built bridge here. Mixed 5 sax cement filling hole to cellar floor.

RECEIVED
STATE CORPORATION COMMISSION
OCT 26 1950
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Thomas H. Parry
Address Box 864, Salina, Kansas

STATE OF KANSAS, COUNTY OF McPHERSON, ss.
Herbert Rhoton (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Herbert Rhoton
1015 No Maple, McPherson, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of October, 1950
Peter Auresse
Notary Public.



23-8273-s 4-50-10M
PLUGGING
FILE SEC 11 T 16 R 3E
BOOK PAGE 39 LINE 17

ROTARY DRILLERS' LOG 15-169-00669-00-00

Operator: Thomas H. Parry
 Box 864
 Salina, Kansas

Elevation:
 Laughlin-Simmons - 1279 G.L.
 1282 D.F.
 1284 K.B.

Runquist # 1

"CASING RECORD"

60' East of C of NW $\frac{1}{4}$ NW $\frac{1}{4}$ NE $\frac{1}{4}$
 Section 11-16S-3W
 Saline County, Kansas

12 $\frac{1}{2}$ " - Pipe set at 148', cemented
 with 193 sacks.
 8 5/8" - Pipe set at 280'. Cemented
 with 240 sacks.

Well commenced: 10-10-50
 Well completed: 10-24-50

Contractor: E. K. Carey, Contractor (Rig #1) Box 620, McPherson, Kansas
 Geologist: Jack Brown, Wichita, Kansas.

Figures Indicate Bottom of Formations K.B.

Rotary Table, Base & Cellar	8	Lime and Shale	1605
Clay	20	Shale	1685
Sand	35	Lime	1895
Shale	70	Shale and Lime	1925
Sand	85	Lime	1955
Shale and Shells	210	Shale and Lime	2030
Saheland Sand	227	Lime and Shale	2225
Shale	250	Lime	2260
Lime	280	Sandy Lime	2302
Shale and Lime	310	Lime and Shale	2325
Lime and Shale	465	Lime	2465
Lime	490	Lime and Shale	2720
Red Bed and Shale	510	Lime	2800
Lime	870	Lime and Shale	2802
Lime and Shale	940	Lime	3190
Shale and Lime	1080	Lime and Shale	3250
Shale and Shells	1310	Shale	3355
Lime	1335	Lime	3416
Shale	1375		

T.D. K.B.

DRILL STEM TEST: 3409-16'. Open 30 minutes. Fair blow at start. Strong blow in 5 minutes. B.H.P. 493#. Recovered 1020' salt water.

GEOLOGIST TOPS:


Mississippi Lime	2830	Viola Lime	3396
Maquoketa Dolemite	3348	Total Depth	3416

The above Rotary Drillers' Log is correct and complete to the best of my knowledge.

RECEIVED E. K. CAREY, CONTRACTOR
 STATE CORPORATION COMMISSION
 OCT 26 1950
 CONSERVATION DIVISION By Herbert Rhoton
 Wichita, Kansas

STATE OF KANSAS)
 COUNTY OF MCPHERSON) ss

On this 25th day of October, 1950, before me, Peter Amell, a Notary Public, in and for said County and State, personally appeared Herbert Rhoton, to me personally known to be the identical person named in and who executed the foregoing instrument, and acknowledged that he executed and delivered the same as his free and voluntary act and deed, for the purpose and consideration therein set forth.



Peter Amell
 Notary Public

PLUGGING
 FILE SEC 11T 16 R3W
 BOOK PAGE 38 LINE 2