

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Ness: _____ County. Sec. 26 Twp. 16S. Rge. (E) 25 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C. NE/4 NW/4
Lease Owner. Sohio Petroleum Company
Lease Name. Drake Well No. 2
Office Address. Box 609 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. 12-24-45 19.
Application for plugging filed. 12-24-45 By telephone 19.
Application for plugging approved. 12-24-45 By telephone 19.
Plugging commenced. 12-24-45 19.
Plugging completed. 12-31-45 19.
Reason for abandonment of well or producing formation Dry hole
If a producing well is abandoned, date of last production _____ 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes by telephone 12-24-45

NORTH

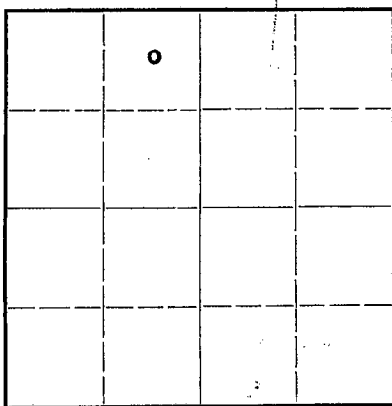

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well. Herb Kerr Great Bend, Kansas
Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 4555 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
No commercial oil or gas shows from top of hole to bottom				10-3/4	315'	None - Cemented to top

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4555' to 315' Heavy mud
315' to 295' Cement
295' to 15' Heavy mud
15' to 5' Cement
5' to top of cellar - Dirt

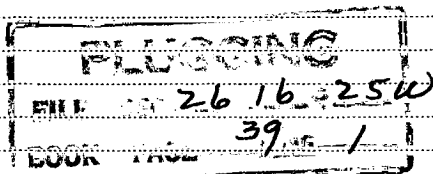

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sohio Petroleum Company
Address Box 609
Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
L. G. Manning (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. G. Manning
Box 609 Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 31st. day of December 19 45.

My commission expires May 8, 1948.

Bernie J. Smith
Notary Public.


My commission expires _____

CONTRACTOR'S VERIFIED LOG

Operator Sohio Petroleum Company Farm Name Drake Well No. 2
 Location NE 1/4 NW 1/4 of Section 26, Township 16 South, Range 25 West
 Pool Name _____ County Ness State Kansas
 Commencement Date Rigging up 11-16-45 Completion Date Tearing out 12-30-46

LOG OF WELL

Depth		Formation	Deviation from Vertical (Degrees)	Remarks
From	To			
0	40	Clay		
40	150	Sand & Gravel		
150	375	Shale & Shells		
375	650	Shale		
650	1065	Shale & Shells		
1065	1300	Shale & Lime		
1300	1330	Anhydrite		
1330	1365	Shale & Lime		
1365	1860	Shale & Shells		
1860	2005	Shale & Shells		
2005	2045	Lime		
2045	2200	Shale & Lime		
2200	2500	Lime & Shale		
2500	2770	Lime		
2770	2815	Shale		
2815	2855	Lime		
2855	2915	Hard Lime		
2915	2960	Lime		
2960	3025	Hard Lime		
3025	3060	Lime		
3060	3155	Broken Lime		
3155	3365	Lime		
3365	3510	Shale & Lime		
3510	3550	Shale & Shells		
3550	3765	Shale		
3765	3805	Shale & Lime		
3805	3915	Lime & Shale		
3915	4005	Lime		
4005	4060	Broken Lime		
4060	4180	Lime		
4180	4210	Hard White Lime		
4210	4350	Lime		
4350	4380	Broken Lime		
4380	4405	Lime & Shale		
4405	4430	Shale		
4430	4520	Lime		
4520	4530	Lime & Chert		
4530	4557	Lime		

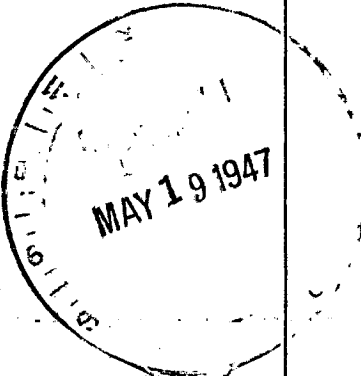

Hole plugged 12-30-46
 Bottom of surface pipe
 12 sacks of cement.
 Top of surface to 20'.
 Below bottom of collar
 with 11 sacks Lone
 Star cement.

PLUGGING
 FILE SEC 26 T 16 R 25 W
 BOOK 39 LINE 1

