

KANSAS ★

State Geological Survey

WICHITA BRANCH

WELL COMPLETION REPORT AND DRILLER'S LOG

S. 27 T. 24 R. 22 E

Loc. NE 1/4

API No. 15 - 011 - 21106
County Number

County Bourbon

Operator Reese Exploration, Inc.

RELEASED

Address P.O. Box 11598, K.C. Mo. 64138

Date: JUN 7 1982

Well No. 6-81 Lease Name Mix


FROM CONFIDENTIAL

Footage Location 50 feet from (N) line 1700 feet from (E) line

Principal Contractor Michael Drilling, Inc. Geologist

Spud Date 3-31-81 Date Completed 4-1-81 Total Depth 522 P.B.T.D.

Directional Deviation Oil and/or Gas Purchaser Maclaskey

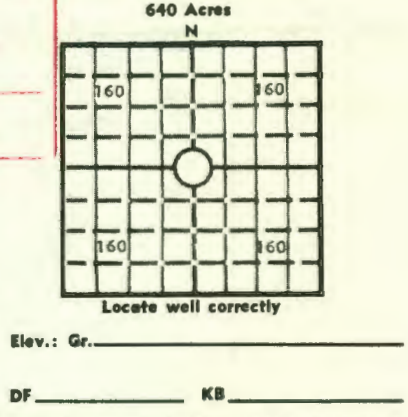

CASING RECORD

Report of all strings set — surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs./ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	8-7/8	6-1/4	17#	40	Portland	4	none
2"	5-1/4	2-3/8	4#	509	"	90	2% Gel

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval
none					

TUBING RECORD

Size	Setting depth	Packer set at
none		

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
Frac - Gelled Water - 60 sacks sand	

INITIAL PRODUCTION

Date of first production May 1981	Producing method (flowing, pumping, gas lift, etc.) Pumping
RATE OF PRODUCTION PER 24 HOURS	Oil 1 bbls. Gas 0 bbls. Water 0 bbls. Gas-oil ratio CFPB
Disposition of gas (vented, used on lease or sold)	Producing interval(s)

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be transmitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation Division, State Corporation Commission, 245 No. Water, Wichita, Kansas 67202. Phone AC 316-522-2206. If confidential custody is desired, please note Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

Operator

Reese Exploration, Inc.

DESIGNATE TYPE OF COMP.: OIL, GAS,
DRY HOLE, SWDW, ETC.:
Oil

Well No.

6-81

Lease Name

Mix

S 27 T 24 R 22 E
~~XX~~

WELL LOG

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Soil and clay	0	6		
lime	6	22		
shale	22	26		
lime	26	28		
shale	28	35		
lime	35	62		
shale	62	67		
lime	67	70		
shale	70	84		
lime	84	90		
shale	90	93		
lime	93	99		
shale	99	260		
lime	260	266		
shale	266	349		
lime	349	366		
shale	366	369		
lime	369	375		
shale	375	419		
lime	419	435		
shale	435	452		
sandy shale	452	462		
sand-oil	462	470		
shale	470	522		

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

Date Received

Patty Richman
Signature

Bookkeeper

Title

June 5, 1981

Date

536363