


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

16 15-169-00834-00-00  
WELL PLUGGING RECORD

NORTH

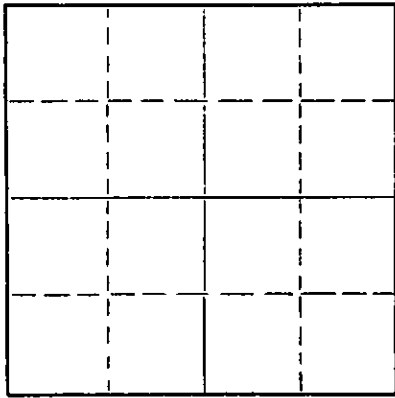

Locate well correctly on above  
Section Plat

Saline County. Sec. 32 Twp. 15 Rge. 3 (E) W (W)  
Location as "NE/CNWxSWx" or footage from lines NW NW NE  
Lease Owner Currier & Keys  
Lease Name Almstedt Well No. 1  
Office Address Salina, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 8-5-61 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 8-9-61 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3381 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	280'	None
				5-1/2"	3376'	2772'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3381', ran sand to 3360' and dumped 5 sacks of cement to 3320' with dump bailer. Pulled 5 1/2" casing. Checked fluid to 210', set 10' rock bridge to 200' and ran 20 sacks of cement @ 200'. Mudded to 35', set 5' rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

STATE CORPORATION COMMISSION  
SEP 7 1961  
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF Kansas, COUNTY OF Rice, ss.  
Noel J. Knight (employee of owner) or KNIGHT CASING PULLING COMPANY of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of August, 19 61

My commission expires May 20, 1964

Milton J. Volin  
Notary Public.



15-169-00834-00-00

# STERLING DRILLING CO.

STERLING, KANSAS

WELL LOG- - - - - ANHSTEDT #1

LOCATION: 6 NW NW NE Section 32-15-34, Saline County, Kansas

OWNER: Currier & Keys

ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: August 26, 1953

Total Depth: 3378'

COMPLETED: September 6, 1953

### LOG

### CASING RECORD

C  
O  
P  
Y

0- 90	Surface Clay
90- 338	Shale & Shells
338- 845	Lime
845-1135	Lime & Shale
1135-1425	Shale
1425-1690	Shale & Lime
1690-2030	Lime
2030-2215	Lime & Shale
2215-2785	Lime
2785-2850	Shale
2850-3150	Lime
3150-3270	Shale
3270-3378	Lime & Shale

Ran 330' of 8-5/8" casing.  
Cemented with 250 sacks of bulk cement.

Ran 3378' of 5-1/2" casing, set 3373'.

### REMARKS:

RECEIVED  
 OIL AND GAS COMMISSION  
 AUG 7 1961  
 CONSERVATION DIVISION  
 Wichita, Kansas

15-169-00834-00-01

H Y D R A U L I C   D R I L L I N G   C O M P A N Y

216 E. PACIFIC  
PHONE TAYLOR 7-1532

SALINA, KANSAS  
Box 477

LOG OF WELL

NAME H. S. Currier HOLE No. 2 DATE DRILLED 8-5 to 12, 1958  
 LOCATION N.W. 1/4 Sec. 32 T 15S., R 3W., Saline Co.  
15' West of Gun Barrel  
 TYPE OF WELL brine disposal TOPOGRAPHY low surface  
 DEPTH 250 FEET. DIAM. OF HOLE 8 1/2 INCHES. DEPTH TO WATER \_\_\_\_\_ FEET  
 CASING: 7" to 150, 4 1/2" to 225 cemented bottom to top  
 YIELD took 10 gpm  
 REMARKS \_\_\_\_\_

DESCRIPTION OF MATERIAL	THICKNESS (FEET)	DEPTH (FEET)	DRILLING CHARACTER & REMARKS
<b>Colluvium and terrace deposits:</b>			
Silt and clay, tan and buff	24	24	
Sand, coarse to fine, silty	2	26	
Silt, soft, buff; cont. ins some gravel, medium to fine 29 to 37	11	37	
<b>Permian:</b>			
Shale, red and green	26	63	
Shale, gray and green interbedded with gypsum	18	81	
Shale, red, gray, and green	9	90	
Shale, gray and green, interbedded with gypsum	36	126	
Shale, gray, green and red	3	129	
Shale, gray-green interbedded with gypsum	15	144	
Siltstone, light and dark gray	7	151	
Shale, gray-green, interbedded with gypsum	3	154	
Siltstone, gray	7	161	
Shale, gray-green, interbedded with gypsum	89	250 TD	

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 SEP 10 1958  
 CONSERVATION DIVISION  
 Wichita, Kansas