


15-169-00829-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Location as "NE/CNW/SW" or footage from lines _____ County, Sec. 31, Twp. 15, Rge. 3 (E) (W)

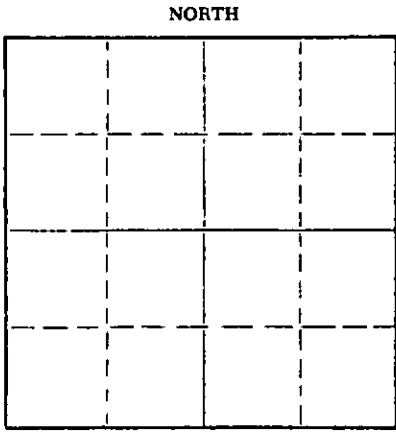

Lease Owner Shields Building Co.
Lease Name Shields Building Co. - Russell Well No. ?
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed June 10 19 51
Application for plugging filed June 1 19 57
Application for plugging approved June 3 19 57
Plugging commenced June 13 19 57
Plugging completed June 25 19 57
Reason for abandonment of well or producing formation Depleted well

If a producing well is abandoned, date of last production June 19 57
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES.

Name of Conservation Agent who supervised plugging of this well W. J. Dancy
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3415 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				12 1/2"	158.79'	cmdt w/195 sax
				8 5/8"	332.23'	cmdt w/100 sax
				5 1/2"	3427.23'	2823.70'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3415 feet to 3415 feet for each plug set.
Hole filled with sand from 3415 to 3405; six sacks of cement placed in hole with down boller; hole filled with sand to 200 ft; ten foot rock bridge installed between 200 ft and 190 ft; fifteen sacks of cement then poured in hole; hole then filled with wd to 30 ft; 10 foot rock bridge installed between 30 and 20 feet; hole covered with 8 sacks of cement, and hole filled with cement to bottom of cement and cap over both 12 1/2 and 8 inch pipe.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes and Sons Pipe Fitting Co.
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
R. J. Shields (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields
Shields Building - Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of July, 19 57

Jack P. Beeman
Notary Public.

My commission expires December 18, 1957

RECEIVED
STATE CORPORATION COMMISSION

JUL 12 1957

PLUGGING
FILE SEC. 31 T. 15 R. 3W.
BOOK PAGE 16 LINE 31

15-169-00829-00-00

WELL LOG

SHIELDS OIL PRODUCERS
Bengtson #2

NW NW NW
Sec. 31, Twp. 15S, Rge. 3W
Saline County, Kansas

Total Depth: 3415'
Commenced: May 25, 1951
Completed: June 10, 1951
Contractor: Honaker Drilling Co., Inc.

GASING RECORD

Size	Run	Cemented
12 1/2"	158'	175 Saz
8 5/8"	332'	100 Saz
5 1/2"	3415'	75 Saz

Elevation: 1303' RB
Treatment: 1000 gallons Acid
Production:

----- Figures Indicate Bottom of Formation -----

Surface Clay	30	Lime	2690
Sand	42	Lime & Shale	2775
Shale & Shells	193	Shale	2805
Lime & Shale	330	Lime & Shale	2960
Lime & Anhydrite	430	Shale	2966
Lime	960	Lime	3010
Lime & Shale	1325	Lime & Shale	3135
Shale, Shells, & Lime	1575	Lime	3160
Shale & Lime	1785	Lime & Shale	3310
Lime	1900	Shale	3370
Lime & Shale	1995	Lime & Shale	3415 T.D.
Shale & Shells	2400		

NOTES

S. L. M. 3410' = 3407'
Drilled Plug - 6-10-51 -- 2500' Oil

TOPS
(Corrected)

Kinderhook	3167'
Misener	3323'
Hunton	3320'
Maquoketa	3349'
Maquoketa Dolomite	3414' -2110
T. D.	3415'

STATE OF KANSAS
JULY 1951
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
SEC. 31 T. 15 R. 3W.
PAGE 16 LINE 31