


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Kearney County, Sec. 8 Twp. 25S Rge. 38 (E) (W)
Location as "NE/CNWxSWx" or footage from lines. C NE/4, SW/4
Lease Owner Pan American Petroleum Corporation
Lease Name R. T. Beaty "B" Well No. 1
Office Address Box 507 Ulysses, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 1, 19 60
Application for plugging filed Telephone - Frank Broadfoot 11-1 19 60
Application for plugging approved Telephone - Frank Broadfoot 11-1 19 60
Plugging commenced 11-2 19 60
Plugging completed 11-2 19 60
Reason for abandonment of well or producing formation No commercial quantities of oil or gas was encountered
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

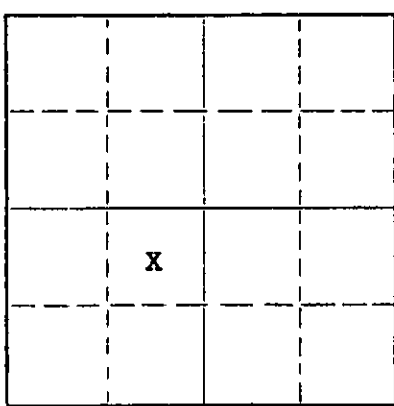

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well _____
Producing formation Nonev Depth to top _____ Bottom _____ Total Depth of Well 5522 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FEET Top TO	SIZE	PUT IN	PULLED OUT
St. Genevieve		5074	8-5/8	1880	None
Morrow		4815			
Council Grove		2670			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Ran open ended drill pipe cemented 2607' to 2300' with 165 sx. common cement, cemented 1900' to 1850' with 25 sx. common cement. Ran rubber plug to 45' below Kelly Bushing and cemented to 1' below ground level with 10 sx. common.

RECORDED
11-18-60 NOV 19 1960
DIVISION
Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Big Chief Drilling Company
Address Box 8837, Oklahoma City, Oklahoma

STATE OF Kansas, COUNTY OF Grant, ss.
I, Albert Ryan, Jr. (employee of owner) or ~~CONSERVATION~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Albert Ryan, Jr.
Box 507 Ulysses, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 60

My commission expires December 3, 1960
R. W. Banks Notary Public.

PAN AMERICAN PETROLEUM CORPORATION

WELL RECORD

Supplemental (Enter "X" when applicable)

Grid for well location with 'X' and '38' marking.

LOCATE WELL CORRECTLY

LEASE R. T. Beaty "B" WELL NO. 1

LOCATION OF WELL: 1980 FT. NORTH SOUTH OF THE NORTH SOUTH LINE AND 1980 FT.

WEST OF THE WEST LINE OF THE EAST WEST 1/4 SW 1/4

OF SECTION 8 TOWNSHIP 25 SOUTH RANGE 38 EAST WEST

Kearney Kansas COUNTY STATE

ELEVATION: RDB 3164 Ground - 3155

COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY HOLE

DRILLING COMMENCED 10-7 1960 COMPLETED 10-30 1960

OPERATING COMPANY Pan American Petroleum Corporation ADDRESS Box 591 Tulsa, Oklahoma

OIL OR GAS SANDS OR ZONES

Table with columns for NAME, FROM, TO, and SAND ZONES: St. Genevieve, Morrow, Council Grove.

WATER SANDS

Table with columns for NAME, FROM, TO, WATER LEVEL.

CASING RECORD (OVERALL MEASUREMENT)

Table with columns for CSO. SIZE, WEIGHT, DESCRIPTION, MAKE, GRADE, QUANTITY FEET.

LINER SCREEN RECORD

Table with columns for SIZE, QUANTITY FEET, SET AT, MAKE AND TYPE.

PACKER RECORD

Table with columns for SIZE, LENGTH, SET AT, MAKE AND TYPE.

CEMENTING RECORD

Table with columns for SIZE, WHERE SET, CEMENT, METHOD, FINAL PRESS.

MUDDING RECORD

Table with columns for METHOD, RESULTS.

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED

ROTARY TOOLS WERE USED FROM 0 FEET TO 5522 FEET, AND FROM FEET TO FEET

CABLE TOOLS WERE USED FROM FEET TO FEET, AND FROM FEET TO FEET

24-HOUR PRODUCTION OR POTENTIAL TEST

WATER BBLs.

IF GAS WELL, CUBIC FEET PER 24 HOURS SHUT-IN PRESSURE LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT...

SUBSCRIBED AND SWORN TO BEFORE ME THIS 8th DAY OF November 1960

MY COMMISSION EXPIRES December 3, 1960

R. W. Banks NOTARY PUBLIC

G. Ryan Area Foreman

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Shale, Red Bed	0	425			
Gyp, Shale; Red Bed	425	735			
Shale, Shells	735	970			
Shale, Anhydrite	970	1045			
Anhydrite	1045	1122			
Shale, Red Bed, Anhydrite	1122	1384			
Shale	1384	1450			
Anhydrite	1450	1674			
Anhydrite, Shale	1674	1876			
Shale	1876	2000			
Shale, Anhydrite	2000	2645			
Shale, Anhydrite, Lime	2645	2703			
Lime, Shale	2703	2865			
Lime, Chalk	2865	2887			
Lime	2887	2908			
Lime, Shale	2908	3042			
Chalk, Lime	3042	3174			
Chalky Lime, Shale	3174	3280			
Lime, Shale, Chert	3280	3325			
Lime, Chalk, Chert	3325	3346			
Chalky Lime	3346	3712			
Lime	3712	3805			
Lime, Chert	3805	4065			
Chalk, Lime	4065	4125			
Lime	4125	4133			
Lime, Chert	4133	4230			
Lime, Chalk, Shale	4230	4257			
Lime, Chert	4257	4394			
Lime, Chalk	4394	4428			
Lime, Shale	4428	4612			
Lime, Shale, Chert	4612	4696			
Lime, Chert	4696	4729			
Lime, Chert, Lignite	4729	4775			
Lime, Chert	4775	4827			
Lime, Shale	4827	4845			
Shale	4845	4886			
Pyrite	4886	4896			
Lime, Shale	4896	4946			
Shale	4946	4951			
Lime, Shale	4951	5009			
Sand	5009	5028			
Lime, Shale	5028	5063			
Lime	5063	5189			
Lime, Shale	5189	5223			
Lime	5223	5326			
Lime, Chert	5326	5354			
Sandy Lime	5354	5359			
Chert	5359	5362			
Lime, Chert	5362	5396			
Lime	5396	5406			
Lime, Sand	5406	5444			
Lime	5444	5522			
TOTAL DEPTH		5522			