


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Ness County. Sec. 19 Twp. 18 Rge. 25 (E/W) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE/4
Lease Owner. Newton Oil Company
Lease Name. Tenny Well No. 2
Office Address. 910 Equitable Bldg., Denver, Colorado
Character of Well (completed as Oil, Gas or Dry Hole) Abandoned Oil Well
Date well completed. October 10 1937
Application for plugging filed. July 4, 1945
Application for plugging approved. July 6 1945
Plugging commenced. October 20 1945
Plugging completed. October 20 1945
Reason for abandonment of well or producing formation. Oil depleted

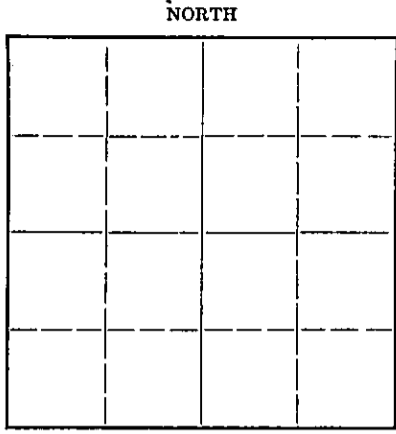

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production. 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes
H. W. Kerr

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr
Producing formation. _____ Depth to top. _____ Bottom. _____ Total Depth of Well. 4467 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

The hole was filled with mud and chat from 4469 feet to 4300 feet. Cement from 4300 feet to 4240 feet with 10 sacks cement. Heavy mud from 4240 feet to rock bridge at 500 feet. Cement from 500 feet to 470 feet. Heavy mud from 470 feet to 30 feet and cement to base of cellar with 10 sacks cement. 642 feet of 10-3/4 inch cemented and left in hole.

11-08-1947

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to. Newton Oil Company
Address. 910 Equitable Bldg., Denver, Colorado

STATE OF COLORADO CITY AND COUNTY OF DENVER, ss.
H. L. Jewell, Treasurer (employee of owner) ~~of the above-described well~~
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. L. Jewell, Treas.
910 Equitable Building, Denver Colo
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of July, 1947
[Signature]
Notary Public.

My commission expires July 30, 1949

PLUGGING
FILE SEC 19 T 18 R 25 W
BOOK PAGE 19 LINE 16

15-135-00613-00-00

Tenny #2
Southeast Quarter of Section 19-18S-25W.
Ness County, Kansas
Oriental Oil Company, Inc.

Commenced: Aug. 30, 1937
 Completed: Oct. 10, 1937

Shale and sand shells	0	170	:	Lime	2873	2873
Shale and sand shells	170	505		Shale	2875	2920
Sand	505	545		Hard lime	2920	2932
Shale and shells	545	649		Shale and broken lime	2932	2942
Shale and lime shells	649	677		Lime	2942	2945
Sandy shale	677	738		Shale	2945	2978
Shale	738	800		Lime	2978	3010
Sand	800	820		Shale	3010	3118
Shale	820	970		Hard lime	3118	3125
Shale and broken sand	970	1150		Shale	3125	3127
Shale	1150	1160		Broken lime	3127	3150
Lime	1160	1190		Shale	3150	3155
Shale	1190	1228		Lime	3155	3180
Red rock and shale	1228	1250		Shale	3180	3190
Sand and shale	1250	1464		Shale and lime shells	3190	3245
Sand	1464	1550		Lime	3245	3255
Red rock and shale	1550	1625		Shale	3255	3276
Sand	1625	1635		Lime	3276	3320
Red rock	1635	1682		Shale	3320	3333
Shale	1682	1760		Lime and shale, broken	3333	3420
Lime	1760	1815		Shale	3420	3432
Shale	1815	1845		Lime	3432	3455
Lime and shale, broken	1845	1905		Broken lime	3455	3483
Shale and red rock	1905	1980		Lime	3483	3530
Shale	1980	2225		Shale	3530	3555
Sand and lime	2225	2235		Lime	3555	3587
Broken lime	2235	2240		Shale	3587	3617
Silt and blue shale	2240	2355		Lime	3617	3635
Lime	2355	2395		Shale	3635	3640
Shale	2395	2480		Lime	3640	3643
Lime	2480	2490		Shale	3643	3685
Shale	2490	2505		Lime	3685	3690
Lime	2505	2535		Shale	3690	3695
Salt	2535	2540		Lime	3695	3725
Broken lime	2540	2585		Shale	3725	3776
Broken lime and shale	2585	2615		Lime	3776	3780
Shale	2615	2653		Shale	3780	3802
Lime, broken	2653	2660		Lime	3802	3832
Lime	2660	2720		Lime, hard	3832	3875
Lime, hard	2720	2740		Lime	3875	3920
Lime	2740	2768		Hard Lime	3920	3930
Shale	2768	2789		Sandy lime and shale	3930	3950
Lime	2789	2815		Lime	3950	3955
Broken lime	2815	2840		Sandy lime, broken	3955	3975
Hard lime	2840	2873		Lime	3975	4002
				Sandy lime	4002	4014
				Hard Lime	4014	4021
				Lime	4021	4028
				Shale	4028	4035
				Lime	4035	4039
				Chat	4039	4047
				Lime	4047	4086
				Shale and sandy lime	4086	4100
				Lime, broken	4100	4122

19 18 25W
 19 16

11-30-1945

Line	4182	4153
Line	4153	4194
Broken lime and shale	4194	4234
Line	4234	4237
Shale	4237	4245
Broken lime	4245	4261
Line	4261	4262
Shale	4262	4274
Hard lime	4274	4290
Shale	4290	4294
Line	4294	4299
Shale	4299	4306
Line	4306	4317
Lime, broken	4317	4327
Shale	4327	4334
Line	4334	4350
Slate	4350	4353
Line	4353	4390
Lime, hard	4390	4410
Black shale	4410	4425
Line	4425	4452
TOTAL DEPTH	4452	

Casing Record
 642' 10 3/4" Surface Pipe 150 sacks cement
 4335' 6 5/8" casing 150 - -
 Oct-19-1945
 Pulled 1632' 6" 6 5/8 in. casing
 511 4444 - 4450

STATE OF OKLAHOMA)
) ss
 COUNTY OF TULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of your Tenny Well #2, located in the Southeast quarter of Section 19, Township 18 South, Range 25 West, Ness County, Kansas.

HELEN RICH & PAYNE, INC.
 by William Proctor
 Secretary

Subscribed and sworn to before me, a Notary Public, this 18th day of October, 1937.

My commission expires July 22, 1939.

Wm. Tillman
 Notary Public

19 18 25W
 19 16
 11-30-1945
 Oct.
 November 20, 1945

NEWTON OIL COMPANY
 Denver, Colorado

Report furnished by Standard Casing Pulling Company of Great Bend, Kansas of plugging work as instructed by State Plugger, Mr. Herb here:

Mudded hole, set bridge in surface 10' of rock at 510', run 15 sacks of cement at 500', filled surface pipe 10-3/4" with surface dirt and run rock bridge at 30' cemented with 10 sacks cement for top cap on surface pipe. Well completed.