

WELL PLUGGING RECORD


FORMATION PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bittling Building Wichita, Kansas

Strike out upper line when reporting plugging of formations.

NORTH

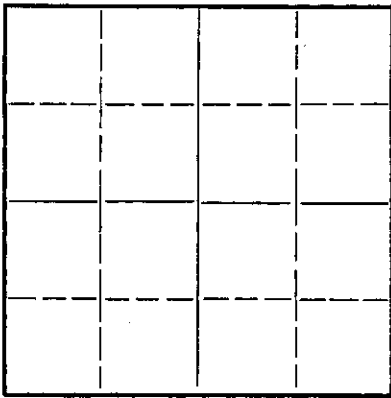

Locate well correctly on above Section Plat

Barton County, Sec. 8 Twp. 20S Rge. 11 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines Cen. NE 1/4 SE 1/4
Lease Owner: National Refining Company
Lease Name: Herter Well No. 1
Office Address: Kaufman Bldg., Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole): Dry
Date well completed: July 17, 1942. 19
Application for plugging filed: July 17, 1942. 19
Application for plugging approved: 19
Plugging commenced: July 17, 1942. 19
Plugging completed: July 17, 1942. 19
Reason for abandonment of well or producing formation: DRY

If a producing well is abandoned, date of last production: 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced?: Yes

Name of Conservation Agent who supervised plugging of this well: C. T. Alexander
Producing formation: None Depth to top: Bottom: Total Depth of Well: 3337' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Rows include Surface Clay, Sand, Shale, red rock & Shells, Red Bed, Anhydrite, Shale & Shells, Lime shale breaks, K. C. Lime, and Shale & Shells.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from... feet to... feet for each plug set.

Hole mudded with heavy mud from 3335' to surface, heavy mud cemented at 2000' and at 500'. Halliburton Plug set at 240' from surface, cemented with 20 sax cement thru drill pipe by Halliburton, mud to 35', Halliburton Plug set at 38', 10 sax cement on plug, pumped thru Halliburton discharge line.

PLUGGING FILE BOOK PAGE 43

Handwritten date stamp: JUL 24 1942

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to: National Refining Company, Kaufman Bldg., Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK contractor N. W. AYLWARD

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) N. W. Aylward (Address) Hollington, Kansas

SUBSCRIBED AND SWORN to before me this 22nd day of July, 1942

My commission expires January 19, 1943.

Handwritten signature of Notary Public: Alfred F. Shaly



THE NATIONAL REFINING COMPANY

PRODUCERS
REFINERS
MARKETERS

WHITE ROSE GASOLINE • EN-AR-CO MOTOR OILS AND INDUSTRIAL LUBRICANTS
304 KAUFMAN BUILDING • WICHITA, KANSAS

July 23, 1942

State Corporation Commission
Conservation Division
800 Bitting Bldg.
Wichita, Kansas

Gentlemen:-

We are enclosing plugging record covering Herter Well No. 1
in 8-20-11 Barton County, Kansas.

Very truly yours


THE NATIONAL REFINING CO.

O.W. Gosnell, Supt.,
Kansas Production Dept.

RVL

Attach

| | |
|------------|------------|
| DI LECTING | |
| FILE | 8. 20. 11W |
| BOOK | 43 3 |

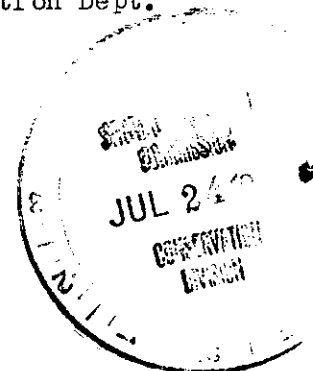

THE NATIONAL REFINING COMPANY
 #1 Kertor
 C NE SE 8-20-11W Barton County
 Conn. G-23-42 Comp. 7-17-42
 Elev. 1776 Pro. Dry

| | |
|---------------------|------|
| shale | 14 |
| sand | 80 |
| red rock & shale | 200 |
| red rock | 225 |
| lime shells | 235 |
| red rock | 520 |
| anhydrite | 550 |
| red rock & shale | 935 |
| shale | 975 |
| salt | 1250 |
| shale & shells | 1570 |
| lime & shale | 1690 |
| shale & lime shells | 1895 |
| shale & shells | 2015 |
| brick lime & shale | 2125 |
| shale & shells | 2575 |
| brick lime | 2590 |
| lime & shale | 2695 |
| brick lime | 2820 |
| lime | 2960 |
| shale & shells | 3063 |
| lime | 3075 |
| lime & shale | 3175 |
| lime | 3310 |
| shale, red & green | 3315 |
| lime | 3315 |
| dolomite | 3335 |
| Total depth | 3335 |

CASING:
 8 5/8" 240'

Jan. 3060
 Arb. 3315

Dead oil stains 3315-16
 Porosity 3316-20 No shows

INDEXING
 FILE 8 20 11W
 BOOK PAGE 43 LINE 3

