

UNION GAS CORPORATION

INDEPENDENCE, KANSAS

Company

Contractor

Drilling
Commenced

Drilling
Completed


Initial
Production

Initial Rock
Pressure

Location

Casing

S. T. R. 15-25-24
County Bourbon
State Kansas
Lease and #1 in SW $\frac{1}{4}$
Well No.

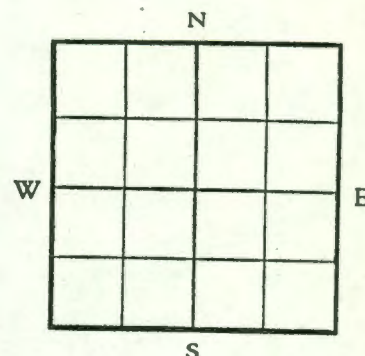

Driller's Record of Formations

soil	2	2		
Pennsylvanian system				
Marmaton formation				
Pawnee limestone				
limestone	18	20		
Labette shale				
shale	14	34		
coal	1	35		
shale clay	2	37		
shale	8	45		
limestone	3	48		
shale	20	68		
Fort Scott limestone				
limestone	17	85		
shale dark	4	89		
cement rock	8	97		
Cherokee shale				
shale	53	150		
limestone shelly	3	153		
limestone	4	197	shale	40 193
shale	45	242		
sandstone	20	262		
shale dark	3	265		
limestone hard	2	267		
shale	108	375		
sandstone salt water	35	410		
shale	62	472		
Mississippian system				
limestone	28	500		