


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
off formations.

Barber County. Sec. 11 Twp. 31 Rge. 14 (W) (XX)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C E $\frac{1}{2}$  NW $\frac{1}{4}$  NE $\frac{1}{4}$   
Lease Owner. The Drillers Gas Company  
Lease Name. Pearl Lake "B" Well No. 1  
Office Address. 903 Union National Bldg., Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole). Gas well  
Date well completed. July 29 19 46  
Application for plugging filed. September 1 19 48  
Application for plugging approved. " 2 19 48  
Plugging commenced. August 27 19 48  
Plugging completed. September 3 19 48  
Reason for abandonment of well or producing formation. Ceased producing

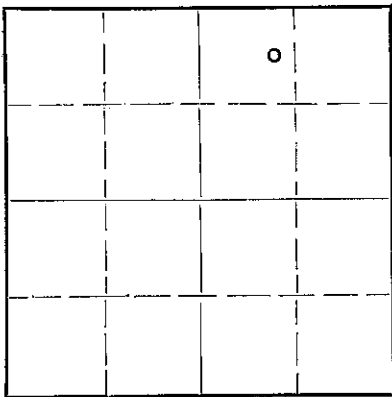

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production. May 19 48  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well. C. D. Stough  
Producing formation. Maquoketa-Viola Depth to top. 4,377 Bottom. ? Total Depth of Well. 4,383 $\frac{1}{2}$  Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Maquoketa-Viola		4,377	4,383 $\frac{1}{2}$	10" 7"	812' 4,377 $\frac{1}{2}$ '	0 2,716'
Douglas		3,772				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped 6 sacks cement @ 4,372'  
Shut off pipe at 2,700'  
Pulled pipe and filled hole with mud to 225'  
Dumped 20 sks. cement at 225'  
Fill hole 225' to top of surface pipe with mud  
10 sacks of cement at top of surface pipe



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. The Drillers Gas Company  
Address. 903 Union National Bldg., Wichita 2, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
M. R. Schwartzkopf (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *M. R. Schwartzkopf*  
903 Union National Bldg., Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of September, 1948

*Bertha P. Wilson*  
Notary Public.

My commission expires August 13, 1951

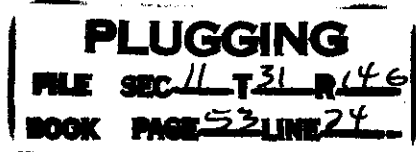

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY  
412 Union National Bldg., Wichita, Kansas


15-007-10175-  
0000

Company - DRILLERS GAS CO.  
Farm - Pearl Lake "B" No. 1

SEC. 11 T. 31 R. 14 W  
CE/2 NW NE

Total Depth. 4383 1/2'  
Comm 6-17-46 Comp. 7-29-46  
Shot or Treated. Acidized  
Contractor.  
Issued. 9-14-46

County. Barber  
KANSAS



CASING:  
10 3/4" 812' Cem.  
7" 4377' Cem.

Elevation. 1677

Production. 3,000,000 Gas

Figures Indicate Bottom of Formations.

shale red & shells	60
red bed & sand	170
shale & red bed	315
shale red	515
shale red & shells	606
shale & shells	818
shale red & shells	1115
shale & shells	1300
salt & shale	1390
shale & shells	1720
lime & shale	1800
shale & anhydrite	1890
lime	1980
lime & shale	2070
lime	2095
shale	2160
lime sdy	2235
lime	2400
lime & shale	2415
shale	2450
lime & shale	2690
shale	2822
lime & shale	2870
shale	2930
lime & shale	3130
lime	3169
lime & shale	3218
lime sdy	3266
lime	3360
lime & shale	3450
shale	3463
lime	3523
shale	3552
lime	3637
shale	3675
lime & shale	3687
shale	3715
sand	3728
lime	3738
lime & shale	3755
shale	3772
sand	3785
shale	3822
lime	3894
shale	3918
lime	4088
lime & shale	4099
lime	4210
lime brkn	4243
lime	4260
lime & shale	4278
lime	4295
lime sharp rough	4312
shale	4350
shale & lime	4376
lime Viola	4383 1/2
Total Depth.	

Tops:  
Douglas 3772  
Maquoketa 4377

Gauge 242,000 Natural  
1000 gal. acid Gauge 1,265,000 cu.ft.  
2000 gal. acid Gauge 2,000,000 Cu.ft.  
5000 gal. acid Gauge 3,000,000 cu.ft.

**PLUGGING**  
FILE SEC 11 T 31 R 14 W  
BOOK PAGE 53 LINE 24