

15-165-02056-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:

Conservation Division
State Corporation Commission
500 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

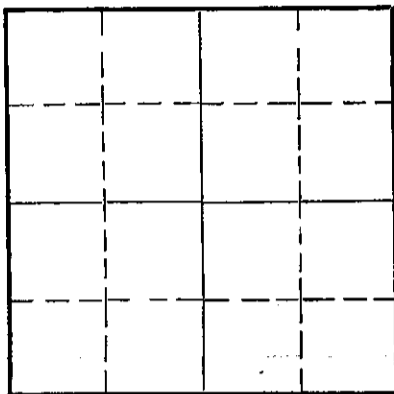

Locate well correctly on above
Section Flat

Rush County. Sec 1 Twp 18 Rge. (E) 16 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. Co. NE 1/4 SW 1/4
Lease Owner The Aylward Production Co. & H. S. Moss Petro. Co.
Lease Name Hall Well No. 1
Office Address 708 Ellis-Singleton Bldg.,
Character of Well (Completed as Oil, Gas or Dry Hole) DRY
Date, well completed September 10, 1938 193
Application for plugging filed September 26, 1938 193
Application for plugging approved 193
Plugging Commenced October 1, 193 8
Plugging Completed October 26, 193 8
Reason for abandonment of well or producing formation DRY
If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced?
YES

Name of Conservation Agent who supervised plugging of this well
Producing formation none Depth to top Bottom Total Depth of Well 3565 Feet.
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Water Sand	Water	505	545	10"	763'	cemented with 340 sax
				7"	3516'	1146'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

River Sand from 3565' to 3535'
Cement plug from 3535' to 3505'
Mud from 3505' to 763'
Wood plug and cement from 763' to 748'
Mud from 235' to 10'
Cement from 10' to bottom of cellar
Cement was placed with dump bailor.
Mud was put in with buckets and shovels.

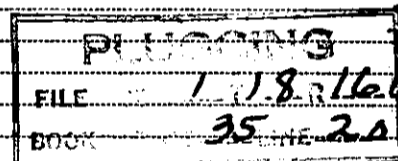

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Aylward Production Company,
Address 708 Ellis-Singleton Building, Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
J. W. Hummel (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. W. Hummel
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of November, 1938

My commission expires January 19, 1939

Alfred F. Shalaby Notary Public.

HALL NO. 1.

Casing Records:

10" 763'
7" OD 3516'

Company: The Aylward Production Company
& H. S. Moss Petroleum Company
Contractor: The Aylward Production Company


Location
On NE 1/4 SW 1-18S-16W,
Rush County - Kansas.

Commenced: 8-17-38 Completed: 9-10-38

Elevation: 1992'
Productions: DRY

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
shale sand	0	270	
shale and shells	270	400	Reamed hole from 11" to 13 3/4" from 0 to 400
shale	400	475	
sand	475	480	
shale	480	505	
water sand	505	545	
shale	545	745	
red rock	745	763	10" set @ 763' and cemented w/ 340 sax
red rock and shale	763	1007	
anhydrite	1007	1030	
lime	1030	1050	
red rock	1050	1250	
shale and shells	1250	1525	
salt	1525	1740	
lime broken	1740	1860	
lime	1860	1950	
lime and breaks	1950	2045	
lime	2045	2315	
shale	2315	2340	
lime	2340	2405	
lime broken	2405	2495	
lime	2495	2530	
slate and shells	2530	2600	
lime shale	2600	2665	
shale	2665	2695	
lime	2695	2725	
shale	2725	2735	
lime	2735	2780	
lime broken	2780	2835	
lime	2835	2985	
shale lime	2985	3000	
lime	3000	3070	
shale	3070	3080	
lime	3080	3210	
shale and shells	3210	3237	
lime	3237	3255	
lime shale	3255	3354	
sand	3354	3364	
lime	3364	3431	
little show of oil	3431	3440	
lime	3440	3460	
lime breaks	3460	3510	
lime	3510	3516	
sand	3516	3525	
granite wash	3525	3560	TD

PLUGGING
FILE NO. 1-18-1611
BOOK PAGE 25 LINE 20



7" OD set at 3516' and cemented w/ 50 sax