

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

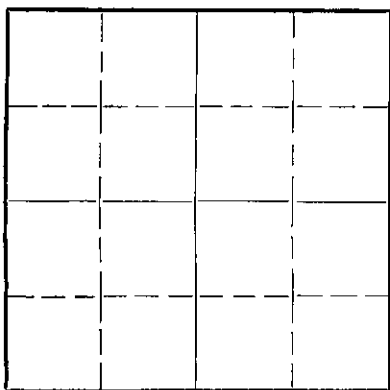

Locate well correctly on above  
Section Plat

Rush County Sec. 19 Twp. 16 Rge. 17 (E) W (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE SE  
Lease Owner Falcon Seaboard Drilling Company  
Lease Name Urban Well No. 1  
Office Address Union National Bank Bldg., Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 27th 1943  
Application for plugging filed July 28th 1943  
Application for plugging approved July 28th 1943  
Plugging commenced July 28th 1943  
Plugging completed July 29th 1943  
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Bert Stafford  
Producing formation Depth to top Bottom Total Depth of Well 3524 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Water Sand	Water	268	307	10-3/4"	360'	None
Dakota Water sand	Water	456'	789'	None		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

From 3524' to 1390' heavy Mud.  
" 1390' to 1340' Cement bridge  
" 1340' to 390' Heavy Mud.  
" 390' to 340' Cement bridge  
" 340' to 20' Heavy Mud.  
" 20' to 6' Cement bridge.

PLUGGING 08-14-1943  
FILE 19-16-17W  
BOOK PAGE 85 LINE 6

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Falcon Seaboard Drilling Company  
Address Union National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Jim Adkins, (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Adkins  
1502- 12th St., Great Bend, Kansas.  
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of August, 1943.

My commission expires April 7, 1947

Margaret A. Reilly  
Notary Public.



Falcon Seaboard's No. 1. Urban

SE. NE; SE. of 19-16-17,  
Rush County, Kansas.

15-165-00346-00-00

Rigging up 7-9-43.

Tearing out tools 7-30-43.

Ran 9 joints, 360' of 10 $\frac{3}{4}$ " spiral slip joint welded pipe cemented with 150 sacks cement.

Formation	From	To
Surface dirt	0	40
Sand rock	40	45
Sand-shells	45	100
Sand	100	128
Shale boulders	128	185
Shale-shells	185	268
Sand	268	307
Shale-shells	307	335
Sand	335	365
Shale-shells	365	375
Shale	375	410
Shale	410	456
Sand-shale	456	789
Red bed	789	925
Sand	925	945
Red shale	945	1040
Red rock shale	1040	1052
Purites shale	1052	1071
Shale-shells	1071	1090
S.L.M. Correction	1090	1060
Shale red	1060	1107
Anhydrite	1107	1140
Anhydrite	1140	1114
Shale-shell	1114	1208
Red bed	1208	1280
Shale	1280	1415
Shale Lime	1415	1490
Sand-shale	1490	1502
Shale-shells	1502	1555
Shale	1555	1557
Salt	1557	1750
Shale-shells	1750	1815
Ft. R. Lime	1815	1895
Shale Lime and anhydrite	1895	1962
Lime-shale	1962	2045
Shale-lime	2045	2110
Shale	2110	2185
Shale-lime	2185	2265
Lime broken with shale	2265	2324
Shale-lime	2324	2370
Sand	2370	2385
Shale-lime	2385	2430

08-14-1943

FILE 19 16-124  
BOOK 85 6

Formation	From	To
Shale-shells	2430	2484
Sandy shale	2484	2501
Shale	2501	2508
Sand	2508	2540
Shale-shells	2540	2555
Shale-shells	2555	2640
Shale	2640	2693
Shale	2693	2745
Shale-lime	2745	2770
Sandy shale	2770	2795
Shale-lime	2795	2845
Shale	2845	2925
Shale-lime	2925	2987
Shale-lime	2987	3040
Shale	3040	3080
Topeka lime	3080	3095
Lime	3095	3131
Shale-lime	3131	3162
Shale-lime	3162	3230
Lime	3230	3275
Lime-shale	3275	3308
K.C. Lime	3308	3370
Lime	3370	3415
Lime	3415	3462
Lime	3462	3482
Lime-quartz	3482	3496
Quartzite-shale	3496	3502
Shale-quartzite	3502	3518
Quartzite	3518	3522
Quartzite	3522	3524


Plugged hole with 20 sacks of cement at 1300'.

I, W. A. Grant, partner of Harbar Drilling Company, certify that to the best of my knowledge and belief, the above log is true and correct.



Subscribed and sworn to before me  
this 5th day of August, 1943.

My commission expires April 7, 1947.

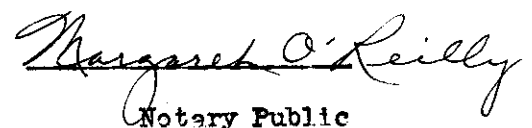

Notary Public

08-14-1943

19 16 17 18  
85 6