

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber County. Sec. 22 Twp. 32s Rge. 15 (E) 15 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE $\frac{1}{4}$ -SW $\frac{1}{4}$ -SE $\frac{1}{4}$
Lease Owner. Champlin Refining Company
Lease Name C. Allen Well No. 2
Office Address. P. O. Drawer #552, Enid, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole). Oil
Date well completed. November 13, 1943
Application for plugging filed. March 23, 1948
Application for plugging approved. March 23, (verbal) 1948
Plugging commenced. April 5, 1948
Plugging completed. April 15, 1948
Reason for abandonment of well or producing formation. Production exhausted
If a producing well is abandoned, date of last production. April 27, 1947
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

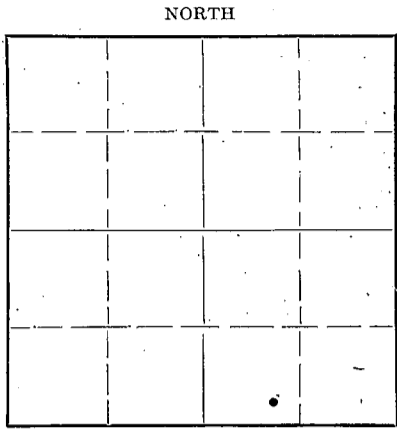

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. Mr. C. D. Stough, Great Bend, Kansas.
Producing formation. Viola Depth to top. 4998' Bottom. 5019' Total Depth of Well. 5019' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS.

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 $\frac{3}{4}$ "	480'	None
				5 $\frac{1}{2}$ "	5003'	3211'5"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

filled hole with chat from 5019' T. D. to 5003' and set Lane Wells plug in bottom of 5 $\frac{1}{2}$ " casing then set cement plug using 5 sacks of cement from top of Lane Wells plug at 4999' to 4986' then filled hole with heavy mud from 4986' to 200' and set cement plug using 20 sacks of cement from 200' to 150' then filled hole with heavy mud from 150' ~~sacks~~ to 25' and set cement plug from 25' to bottom of cellar using 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Champlin Refining Company
Address P. O. Drawer #552, Enid, Oklahoma.

STATE OF Kansas, COUNTY OF Barton, SS.
S. P. Hall (employee of owner) ~~XXXXXX~~ of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) S. P. Hall 4-29-48
APR 29 1948

P. O. Box 167, Ellinwood, Kansas.
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of April, 1948

My commission expires October 24, 1951

M. Kenneth Stearns
Notary Public.

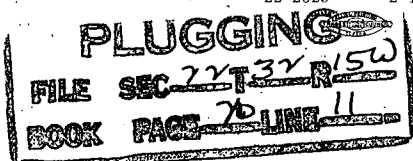

N

WELL RECORD

COUNTY Barber SEC. 22 TWP. 32S RGE. 15W
 COMPANY OPERATING Champlin Refining Company
 OFFICE ADDRESS Box 552 - Enid, Oklahoma
 FARM NAME Clyde Allen WELL NO. 2
 WELL LOCATED 330' from south line and 1650' from east line of the SE 1/4

CHARACTER OF WELL Oil

Well Commenced: October 10, 1943 Well Completed: November 9, 1943

CASING RECORD

SIZE	WT.	THDS.	MAKE	FT.	IN.	AMOUNT PULLED	CEMENT
5 1/2"	14.5		Y-town	5015	8	None	250 Sacks
10-3/4"			Natl	480		None	250 Sacks

FORMATION RECORD

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Red Bed-Sand	0	270	Shale-Lime	4655	4675
Red Bed-Sand-Shale	270	515	Lime-Shale	4675	4710
Red Bed-Shale	515	710	Shale-Lime	4710	4775
Red Bed-Shale-Shells	710	1195	Lime-Shale	4775	4795
Shale-Shells	1195	2105	Shale-Lime	4795	4825
Lime	2105	2110	Lime-Shale	4825	4880
Shale-Lime	2110	2280	Shale-Lime	4880	4900
Lime	2280	2335	Shale	4900	4925
Lime-Shale	2335	2490	Lime-Shale	4925	4994
Lime-Shale	2490	2775	Shale-Lime	4994	5031
Shale-Lime	2775	2860	Total Depth	5031	
Lime-Shale	2860	2940			
Shale-Sand-Shells	2940	3005			
Shale-Lime	3005	3085			
Shale	3085	3160			
Shale-Lime-Shells	3160	3210			
Shale-Lime	3210	3280			
Shale	3280	3410			
Shale-Lime	3410	3460			
Lime-Shale	3460	3525			
Shale	3525	3580			
Shale-Lime	3580	3640			
Lime-Shale	3640	3785			
Shale	3785	4065			
Shale-Lime	4065	4100			
Shale	4100	4125			
Shale-Lime	4125	4185			
Shale	4185	4225			
Shale-Sandy Lime	4225	4270			
Shale-Lime	4270	4295			
Lime	4295	4610			
Lime-Shale	4610	4635			
Lime	4635	4655			

SAMPLE TOPS

Ft. Riley	2460
Lansing	4252
Mississippian	4780
Viola	4998

APR - 1 1948
4-1-48

Subscribed and sworn to before me this 14th day of December 1943

J. C. Wentworth
Superintendent.

Notary Public

My Commission Expires: May 25, 1946.

PLUGGING
FILE SEC 22 TWP 32 R 15W
BOOK PAGE 20 LINE 11