

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Harper

County. Sec. 24 Twp. 34S Rge. 5W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SE NW  
Lease Owner The Texas Company  
Lease Name M. H. Baker Well No. 2  
Office Address 614 Bitting Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed May 5 19 53  
Application for plugging filed May 6 19 53  
Application for plugging approved (Verbal 5-6) May 7 19 53  
Plugging commenced May 6 19 53  
Plugging completed May 6 19 53  
Reason for abandonment of well or producing formation

NORTH

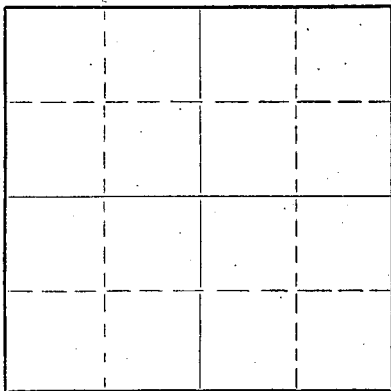

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W. G. Buffington  
Producing formation Depth to top Bottom Total Depth of Well 4120 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	658'	0'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGED AS FOLLOWS

4120' to 600' - Heavy Mud  
600' - Wooden Plug  
600' to 588' - 6 Sacks Cement  
588' to 35' - Heavy Mud  
35' - Wooden Plug  
35' to bottom of Cellar - 15 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stickle Drilling Company  
Address Box 202, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
R. M. Acher (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) RMAcher  
614 Bitting Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of May 19 53

My commission expires September 20, 1956

24-2675-S 2-52-20M

PLUGGING  
FILE SEC 24 T 34 R 5W  
BOOK PAGE 29 LINE 22

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 19 1953  
CONSERVATION DIVISION  
Wichita, Kansas

# LOG OF WELL

FORM PO-214 Sheet 1 (10-52) 25M

W. Baker #2 SHEET 1

OWNER The Texas Company DIVISION Oklahoma DATE MADE May 13, 1953

DISTRICT Kansas LEASE W. H. Baker WELL NO. 2

STATE Kansas COUNTY OR PARISH Donnell TWP. 24S RANGE 5N SEC. 24

LOCATION OF WELL NW 34-24-5N

---

COMMENCED RIGGING UP 4-21-53 COMMENCED DRILLING 4-21-53 COMPLETED DRILLING 5-5-53

DAY DRILLER \_\_\_\_\_ NIGHT DRILLER \_\_\_\_\_ CONTRACTOR Stickle Ind. Co.

CABLE FROM \_\_\_\_\_ TO \_\_\_\_\_ ROTARY FROM 0 TO 4120' COMPANY RIG NO. \_\_\_\_\_

TOTAL DEPTH 4120' MEASURED BY W. C. Harrell ELEVATION DP - 1221  
BL - 1224

## CASING RECORD

BL - 1215

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS		
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	SET AT
<u>10-3/4"</u>	<u>32.75#</u>	<u>658'</u>				<u>(10-25, 7-3)</u>		<u>new casing</u>				
<u>10-3/4"</u>	<u>center part of 652'</u>	<u>w/ 175'</u>										

WAS CASING CEMENTED? \_\_\_\_\_ IF SO, HOW MANY SACKS OF CEMENT USED? \_\_\_\_\_

LINER: STATE SIZE AND WEIGHT \_\_\_\_\_ WHERE SET \_\_\_\_\_ FT. AND INS. BLANK \_\_\_\_\_ FT. AND INS. PERFORATED \_\_\_\_\_

HOW PUT TOGETHER \_\_\_\_\_ COUPLING \_\_\_\_\_ FLUSH JOINT \_\_\_\_\_ INSERTED \_\_\_\_\_

REMARKS: \_\_\_\_\_

## EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT	
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.	

FLOWING, PUMPING, GASSEY OR DRY Dry PRODUCTION FIRST 24 HOURS \_\_\_\_\_ PRODUCTION SETTLED \_\_\_\_\_

IF GAS WELL, OPEN FLOW CAPACITY \_\_\_\_\_ SHUT-IN PRESSURE \_\_\_\_\_ ROCK PRESSURE \_\_\_\_\_

KIND OF SHOT \_\_\_\_\_ SIZE OF SHOT, QUARTS \_\_\_\_\_

NUMBER OF SHELLS \_\_\_\_\_ SIZE OF SHELLS \_\_\_\_\_ INCHES DIAMETER \_\_\_\_\_

LENGTH OF SHELLS \_\_\_\_\_ FEET \_\_\_\_\_ INCHES \_\_\_\_\_ TOP OF SHOT \_\_\_\_\_

BOTTOM OF SHOT \_\_\_\_\_ ANCHOR \_\_\_\_\_ WELL BRIDGED TO \_\_\_\_\_

TOTAL DEPTH OF WELL \_\_\_\_\_ NUMBER OF SHOT \_\_\_\_\_ PRODUCTION BEFORE SHOT \_\_\_\_\_ BBLS PER DAY \_\_\_\_\_

PRODUCTION AFTER SHOT \_\_\_\_\_ BBLS PER DAY \_\_\_\_\_ SHOT FURNISHED BY \_\_\_\_\_

NAME OF SHOOTER \_\_\_\_\_ SHOT INSPECTED \_\_\_\_\_ BY \_\_\_\_\_ (COMPANY EMPLOYEE)

COMMENCED DRILLING DEEPER \_\_\_\_\_ COMPLETED \_\_\_\_\_ DRILLING DEEPER \_\_\_\_\_

TOTAL DEPTH \_\_\_\_\_ PRODUCTION FIRST 24 HOURS \_\_\_\_\_ PRODUCTION SETTLED \_\_\_\_\_

REMARKS: DIVED W. H. Baker #2 Bluff Creek Pool ID 4120' Completed Drilling - 5-5-53 Completed Plugging - 5-8-53

**PLUGGING**  
 FILE SEC 24-34-R-5N  
 BOOK PAGE 22 LINE 22

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS WHEN, HOW, AND BY WHOM PLUGGED.  
 STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG.  
 IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT WRITE ON BOTTOM OF LAST SHEET OF LOG.

# LOG OF WELL

SHEET No. \_\_\_\_\_

District **Kansas**

Owner **The Texas Company Farm M. H. Baker**

Well No. **2**

FORMATION	AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS
Sand, Shale & Shells	0	653			<u>CASING RECORD</u> 10-3/4" casing set @ 653' w/475 sacks cement and 4 sacks CC, cement circulated.  <u>ELEVATIONS</u> DP-----1221 KB-----1223 CL-----1215  <u>TOPS:</u> Topeka-----2710 Stalnaker-----3410 Layton-----3744 Kansas City-----3762 Basic Kansas City 3997 Marmaton-----4079
Shale & Shells	680	27			
Shale, Shell & Salt	855	175			
Anhydrite	870	15			
Shale & Shells	1115	245			
Shale & Lime	1140	25			
Lime & Shale	1580	440			
Shale & Shells	1735	155			
Shale & Lime	1965	230			
Shale & Shells	2295	330			
Shale & Lime	2315	20			
Lime & Shale	2515	200			
Lime	2575	60			
Shale	2655	80			
Shale & Lime	2874	219			
Lime & Shale	2990	116			
Shale & Lime	3095	105			
Shale, Lime & Sand	3188	93			
Shale & Lime	3290	102			
Shale	3385	95			
Shale & Lime	3472	87			
Sand & Shale	3570	98			
Sand Lime & Shale	3590	20			
Sand & Shale	3600	10			
Lime & Shale	3640	40			
Shale, Sand & Lime	3685	45			
Shale	3733	48			
Shale & Sand	3761	28			
Lime	3974	213			
Lime & Shale	4031	57			
Shale & Lime	4097	66			
Lime & Shale	4120	23			
Total Depth	4120'				

REMARKS:

- 5-3-53 Ran DST #1 from 3825-44', open 2 hours, recovered 280' muddy salt water. SHP 1520' in 30 minutes.
- 5-4-53 Ran DST #2 from 3941-53', open 1-1/2 hours, recovered 25' drilling mud. SHP 40' in 30 minutes.
- 5-6-53 Ran Schlumberger Survey. Plugged and abandoned.