

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Barber County. Sec. 35 Twp. 30S Rge. 14 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SW NE SW

Lease Owner. J.M. Huber Corporation.

Lease Name. Buck Well No. 1

Office Address. Drawer 831, Borger, Texas.

Character of Well (completed as Oil, Gas or Dry Hole). Dry

Date well completed. November 4, 1944

Application for plugging filed. November 5, 1944

Application for plugging approved. November 5, 1944

Plugging commenced. November 5, 1944

Plugging completed. November 5, 1944

Reason for abandonment of well or producing formation. Dry

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. H.W. Kerr.

Producing formation. Depth to top. Bottom. Total Depth of Well. 4696 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8"	794'	
				5 1/2"	4455'	Left in.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

The hole was plugged back 4636 to 3380 with cement.
Filled with heavy mud from 3380 to 200 feet.
Bridged at 200 feet.
Filled with cement from 200 to 170 feet.
Filled with mud 170 feet to 15 feet.
Filled with cement 15 feet to cellars base.

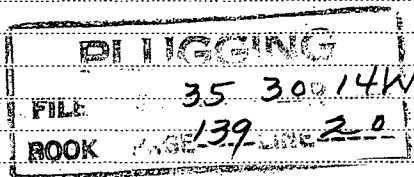

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J.M. Huber Corporation.
Address. Drawer 831, Borger, Texas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E.A. Huffman (employee of owner) or (owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edward A. Huffman
J.M. Huber Corporation,
302 Petroleum Building, Wichita, Kansas.
(Address)

SUBSCRIBER AND SWORN to before me this 13th day of February
February 2, 1948.
Notary Public.

Farm Name: Buck No. 1
 Company: J.M. Huber Corporation.
 Commenced: 8-21-44
 Completed: 11-4-44
 Contractor: J.M. Huber Corporation.

Location: SW 1/4 SW
 Sec. 35-30S-14W
 Barber county,
 Kansas.
 Production: Dry and Abandoned.

Drilled with Rotary and Cable.

Casing Used: 794' 8"
 4455' 5 1/2" cemented.

red bed and gyp shells	80
gyp shells	190
gyp shells and red bed	615
red bed	644
red bed and shells	750
shale and shells	777
anhydrite and shale	790
shale and shells	1200
shale, shells and salt	1470
shale and shells	1635
lime and shale	1923
lime	2190
lime and shale	2260
lime and chert	2270
lime	2580
lime and shale	3076
lime	3116
lime and shale	3225
lime	3264
lime and shale	3370
lime	3440
lime and shale	3540
lime	3641
lime and shale	3805
lime	3850
sand	3853
3853 equals 3857	
lime	4405
shale and lime	4474
lime	4514
lime and chert	4519
chert	4530
lime and chert	4534
chert	4541
lime	4565
lime and chert	4600
lime	4614
sand and shale	4655
shale	4684
Arbuckle lime	4696
Total Depth.	

35 30 14W
 139 20

FEB 14

No. 1 Buck - J.M. Huber Corporation.

SAMPLE TOPS

Douglas	3732	
" sand	3738-65	sand, porous, no staining observed.
" "	3792-98	" , fair porosity, no shows.
" "	3853-57	" , fine, low porosity, shaly, very light stain.
Cored	3857-64	Recovered 1' sand, tight, shaly, light stain.
Lansing	3875	
Base KC	4250	
Massey	4313-17	lime, moderate porosity, fair staining.
Chert zone	4372	
Maquoketa	4457	
Cored	4474-84	Recovered 6' dolomite, fine, limy, cherty, with very low porosity and staining limited to chert zone.
Cored	4484-92	Recovered 5' as above.
Cored	4492-4504	Recovered 12' 4'0" dolomite, medium, xln, spotted porosity & staining. 8'0" lime, coarse xln, " " " "
Xin Viola	4496	
Cored	4504-14	Recovered 6' dolomite, fine cherty with dark lime streaks.
Cherty Viola	4505	
HDST	4462-4514	Open 40 min. Recovered 45' rotary mud, no gas blow.
Simpson	4596	
" sand	4611-14	sand, hard tight, no shows.
" "	4614-30	" , coarse, porous, few scattered spots staining in top along with good porous unstained sand.
Arbuckle	4684	
Total Depth	4696	
HDST	4685-96	Open 25 min, recovered 365' mud and 35' salt water.

Ran Lane Wells Radioactivity log, went to 4692, total depth, plugged back to 4512, cemented 5 1/2" casing at 4455. Completed Rotary work 9-23-44.

Drilled the plug. Little rotary mud with slight gas odor. Shot 50 quarts solidified which went off accidentally 4330-60. After unloading hole had small show gas and trace of oil, apparently coming through hole in casing. Did not attempt to go through damaged casing at 4330. Tried to treat with 1500 acid, but could not complete treatment. Attempted treatment killed the small amount of gas that was showing previously. P.B. 4324. Perforated 39 shots 4309-21. Recovered 200' slight oil cut rotary mud, which exhausted and had no fluid show. Treated with 500 and 1500 acid, which did not help. P.B. 4298. Perf. 14 holes 3844-49. Filled up 2000' water 30 min. Bridged hole at 3855, squeezed perforations, drilled cement to 3855, bailed and swabbed hole down and after load, bailed 1 1/2 BO (43°) and 1 1/2 BWP. After 12 hours bailed 10 B fluid per hour, 2% oil. Attempted two squeeze jobs with no success. Shut off perforations with Dowell Plastic. Perforated 57 holes 3835-55, no show. Drilled out bridge, swaged out gas from 4330-60. Ran tools to 4450. Some gas show. Bailer hung up at 4394 and could not recover same. Perforated 24 holes 4347-55, no show. Treated with 1000 acid, swab 5 BW per hour, no oil. Dry and Abandoned.

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct copy of the log of the Buck No. 1 located in the Southwest Quarter of the Northeast Quarter of the Southwest Quarter (SW NE SW) of Section 25, Township 30 South, Range 14 West, Barber county, Kansas.

35 30 14 W
139 20

E. A. Huffman
E. A. Huffman,
Division Manager,
J.M. Huber Corporation.

Subscribed and sworn to before me this 30th day of November 1944.

My commission expires Feb. 2, 1948

E. Leanne Caselberry
Notary Public.