

## WELL PLUGGING RECORD

**STATE OF KANSAS**  
**STATE CORPORATION COMMISSION**

**Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas**

NORTH


Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well..... C. D. Stough - Great Bend, Kans.  
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 4360' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

### CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to .....feet for each plug set.

Set Plug at 275' and cemented with 20 sacks of cement. Mudded hole to 35', set bridge and dumped 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... J. M. Huber Corporation  
Address..... Box 460  
..... Pratt, Kansas

STATE OF KANSAS, COUNTY OF PRATT SS.

I, J. L. Kyler (employee of owner) or (~~owner~~ or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

.....  
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of January 1952

My commission expires.....September 10, 1955

**22-2625**

2-48—15M

Notary Public.

FILE 9-31-14W  
BOOK PAGE 136 LINE 3v

15-007-10170-0000

DRILLER'S LOG

COMPANY: Huber & Cities Service  
 CONTRACTOR: J. M. Huber Corp.  
 FARM NAME: Mills #3  
 COMMENCED: 4-29-47  
 COMPLETED: 6-6-47


LOCATION: SE NW SW  
 Sec. 9 - 31 - 14  
 Barber County, Kans.  
 ELEVATION:

CASING USED: 16" set at 117' w/475 sacks of cement  
 10 3/4" at 775' w/375 sacks  
 5 1/2" at 4335' w/125 sacks

Sand gravel, shells	0	70
Red bed, shells	70	605
Shale, shells	605	1125
Salt beds, shale	1125	1325
Shale, shells	1325	1600
Lime, shale	1600	1695
Broken lime, shale	1695	1795
Lime, shale	1795	1915
Lime	1915	2010
Broken lime, shale	2010	2170
Lime, chert	2170	2190
Lime, shale	2190	2560
Lime, shale streaks	2560	2410
Shale	2410	2480
Shale, shells	2480	2700
Lime, shale	2700	3265
Lime to broken lime	3265	3350
Lime, shale	3350	3360
Lime	3360	3420
Lime, broken	3420	3555
Lime, shale	3555	3635
Sand	3635	3670
Lime, shale	3670	3725
Shale	3725	3740
Sand	3740	3762
Shale, sand	3762	3875
Lime, shale	3875	4025
Lime	4025	4110
Lime, shale	4110	4190
Shale, lime	4190	4210
Lime, shale	4210	4280
Shale	4280	4320
Lime	4320	4360

Total Depth

Fair to good streaked porosity and oil staining 4320-50 RTD.  
 at 4350 bailed 1/3 BOPH. DD 4360 TD, no inc. 500 acid. Flowed  
 42 BO/1 hour - 40 min. Estimated 2,000 MCF gas

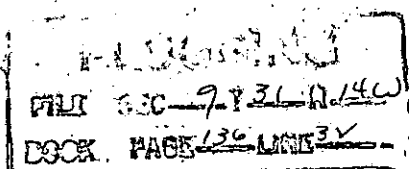

RECEIVED  
 JAN 18 1952  
 1-18-52