


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber County, Sec. **18** Twp **31s** Rge. **(E) 14w (W)**
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines **392' from East Line.**
Lease Owner **Champlin Refining Co. 330' from North line NE $\frac{1}{4}$**
Lease Name **Oldfather** Well No. **2**
Office Address **P. O. Drawer #552, Enid, Oklahoma.**
Character of Well (completed as Oil, Gas or Dry Hole) **Gas**
Date well completed **June 21, 1947** 19
Application for plugging filed **January 15, 1951** 19
Application for plugging approved **January 18, 1951 (Verbal)** 19
Plugging commenced **January 19, 1951** 19
Plugging completed **January 25, 1951** 19
Reason for abandonment of well or producing formation **Non-Productive**

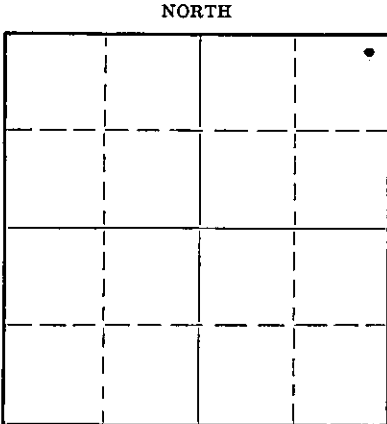

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production **July 1950** 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? **Yes**

Name of Conservation Agent who supervised plugging of this well **Mr. C. D. Stough, Great Bend, Kansas.**
Producing formation..... Depth to top..... Bottom..... Total Depth of Well..... Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 $\frac{1}{2}$ " OD	750'	None
				5 $\frac{1}{2}$ " OD	4510'	3215' 11"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to
feet for each plug set.

Original Total Depth - 4510'
Plug back total depth - 4450'

Filled hole with crushed rock from 4450' PBD to 4335' and set cement plug on top of rock from 4335' to 4300' using 5 sacks of cement then filled hole with heavy mud from 4300' to 275' and set permanent rock bridge from 275' to 265' and set cement plug on top of rock from 265' to 235' using 15 sacks of cement then filled hole with heavy mud from 235' to 30' and set permanent rock bridge from 30' to 25' and filled hole with cement from top of rock bridge to bottom of cellar using 10 sacks of cement.

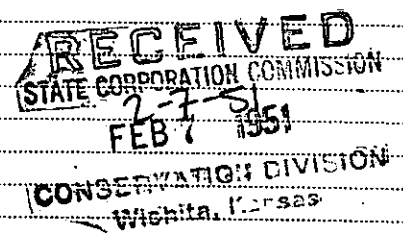


(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to **Champlin Refining Company**
Address **P. O. Drawer #552, Enid, Oklahoma.**

STATE OF **Kansas**, COUNTY OF **Barton**, SS. **S. P. Hall** (employee of owner) or ~~(owner)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *S. P. Hall*
P. O. Box #167, Ellinwood, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this **6th** day of **February**, 19 **51**
M. Kenneth Stearns
Notary Public.

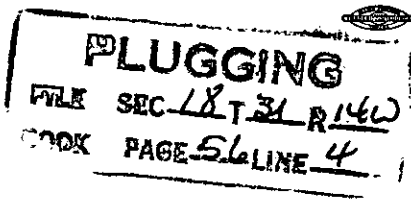

15-007-10192-0000
CHAMPIIN REFINING COMPANY

FORMATION LOG

OLDFATHER #2 Located-NE $\frac{1}{4}$ -NE $\frac{1}{4}$ -NE $\frac{1}{4}$ of Sec.
18-31s-14w - Barber County, Kansas

0'	-	275'	Sand & Shale.
275'	-	608'	Red Bed & Shale.
608'	-	760'	Shale.
760'	-	775'	Shale.
775'	-	1175'	Shale.
1175'	-	1560'	Shale and shells.
1560'	-	1780'	Shale and shells.
1780'	-	1870'	Shale and shells.
1870'	-	1950'	Shale and gyp.
1950'	-	2050'	Shale and lime.
2050'	-	2210'	Lime and shale.
2210'	-	2300'	Lime and shale.
2300'	-	2380'	Lime.
2380'	-	2450'	Lime and shale.
2450'	-	2545'	Shale.
2545'	-	2650'	Shale and lime.
2650'	-	2755'	Shale and lime.
2755'	-	2840'	Shale.
2840'	-	2920'	Shale.
2920'	-	3060'	Shale and lime.
3060'	-	3195'	Lime and shale.
3195'	-	3270'	Lime and shale.
3270'	-	3390'	Lime.
3390'	-	3500'	Lime.
3500'	-	3600'	Sand and shale.
3600'	-	3685'	Lime.
3685'	-	3795'	Lime and shale.
3795'	-	3880'	Lime and shale.
3880'	-	3920'	Lime.
3920'	-	3985'	Lime and shale.
3985'	-	4025'	Lime and shale.
4025'	-	4100'	Lime.
4100'	-	4120'	Lime and shale.
4120'	-	4170'	Lime.
4170'	-	4190'	Lime.
4190'	-	4210'	Lime.
4210'	-	4250'	Lime and shale.
4250'	-	4300'	Chert and shale.
4300'	-	4325'	Chert and shale.
4325'	-	4350'	Lime and shale.
4350'	-	4388'	Lime and chert.
4385'	-	4390'	Lime and chert.
4390'	-	4455'	Lime and chert.
4455'	-	4495'	Lime, chert and shale.
4495'	-	4510'	Lime, chert and shale.
4510'	-		TOTAL DEPTH

RECEIVED
JAN 16 1951
1-16-51

PLUGGING
WELL NO. 18-31-14W
LOG PAGE 56 OF 74